

91MCE Series

Mini Compact Limit Switch



DESCRIPTION

The 91MCE series limit switch is a compliment to Honeywell's existing product line of smaller, lower cost limit switches. Designed for modern industrial OEMs, the miniature package size fits in applications where space is limited. The small package size can be gang mounted for applications requiring more than two switch circuits. The 20mm mounting pattern is a globally accepted mounting standard.

This product family offers the user many options including a variety of different actuator styles. Connection options include

pre-leaded cable in various lengths or M12 connectors, both with side or bottom exits. Design flexibility is further enhanced with the availability of both slow action and snap action circuitry. Direct acting contacts ensure the NC contact opens when actuated. The epoxy-sealed rugged die-cast housing provides environmental durability.

Priced competitively, the 91MCE is a drop-in replacement to many products, and provides enhanced quality that customers expect from Honeywell.

FEATURES

- Direct acting contacts ensures NC contacts open when actuated ➡
- Sealed to IP67; NEMA 1, 4, 12, 13 suitable for outdoor applications
- CE, cULus, CCC approvals meet most global approvals
- Nine actuator styles offer design flexibility
- Slow-action and snap-action circuitry options
- Pre-leaded cable and M12 connector options
- Mechanical life: 5 million operations
- Side exit and bottom exit connection options

POTENTIAL APPLICATIONS

- Machine equipment
- Material handling
- Outdoor equipment

91MCE Series

TECHNICAL SPECIFICATIONS


Parameter	Measure
Operating speed	0,05 mm to 1 m per second
Operating frequency – mechanical	120 ops per minute
Operating frequency – electrical	30 ops per minute
Insulation resistance	> 100 Mohm @ 500 Vdc
Rated voltage	300 Vac (EN60947-5-1)
Rated thermal current	10A pre-leaded versions; 3A connector versions
Electrical rating	ac 15 A 300; dc 13 Q300
Dielectric strength	1000 Vac for one minute between current carrying parts 2500 Vac for one minute between non-current carrying parts
Mechanical life	5 million operations
Electrical life	5 x 10 ⁵ operations
Operating temperature	-25 °C to 85 °C [-13 °F to 185 °F] without the formation of ice
Humidity	< 95 % RH
Cable	5 core, 0.75 mm ²
Degree of protection	IP67

ELECTRICAL RATINGS

IEC 947-5-1 / EN 90947-5-1

Designation & Utilization Category	Rated operational current I _e (A) at rated operational voltage U _e						VA rating	
	120 V	240 V	380 V	480 V	500 V	600 V	Make	Break
AC15 A300	6	3	–	–	–	–	7200	720
	125 Vdc		250 Vdc					
DC13 Q300	0.55	0.27					69	69

BAR CHARTS

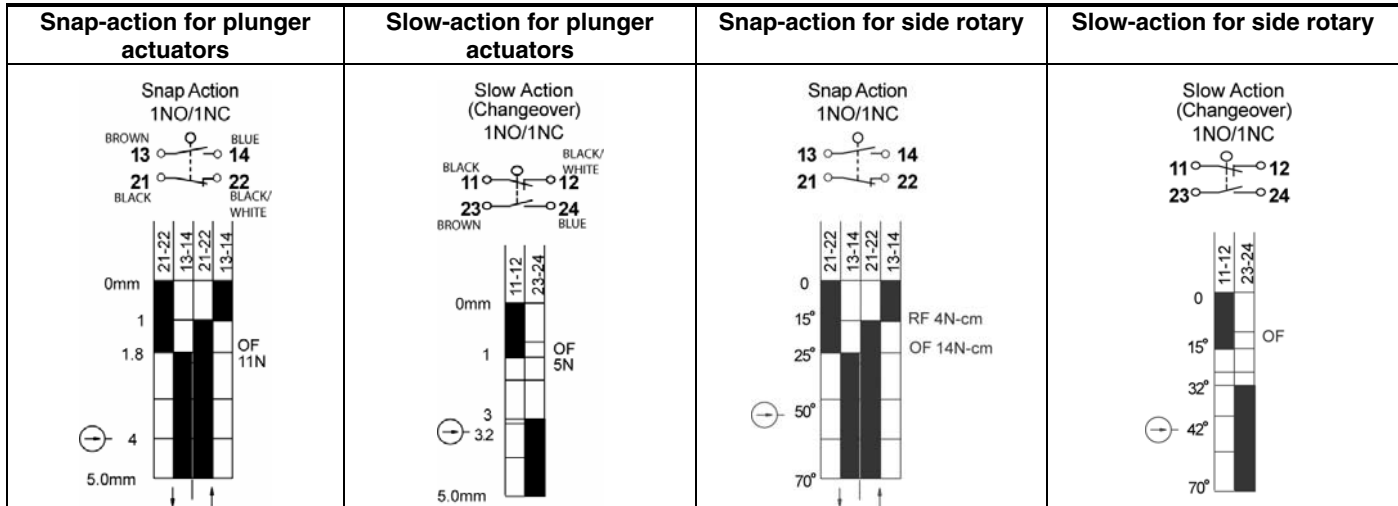

PIN OUT – “Q” OPTION

	Pin 1 & 2 – Normally Closed
	Pin 3 & 4 – Normally Open

Mini Compact Limit Switch

DIMENSIONS

<p>91MCE1-P1/S1 – PIN PLUNGER</p>	<p>91MCE2-P1/S1 – ROLLER PLUNGER</p>	<p>91MCE3-P1/S1 – CROSS ROLLER PLUNGER</p>
<p>91MCE16-P1/S1 – SIDE ROTARY LEVER WITH METAL ROLLER</p>	<p>91MCE18-P1/S1 - PIN PLUNGER WITH BOOT SEAL</p>	<p>91MCE27-P1/S1 - PANEL MOUNT PIN PLUNGER</p>
<p>91MCE30-P1/S1 - PANEL MOUNT BOOTED PIN PLUNGER</p>	<p>91MCE28-P1/S1 – PANEL MOUNT ROLLER PLUNGER</p>	<p>91MCE29-P1/S1 – PANEL MOUNT CROSS ROLLER PLUNGER</p>

91MCE SWITCH PART NUMBER TREE

91MCE	16	P	1	B	D																																				
Switch type	Actuator code	Switch type	Cable length	Modifications	Connector																																				
91MCE Series Mini Compact Limit Switch	<table border="1"> <tr><td>1</td><td>Pin plunger</td></tr> <tr><td>2</td><td>Roller plunger</td></tr> <tr><td>3</td><td>Cross-roller plunger</td></tr> <tr><td>16</td><td>Side rotary</td></tr> <tr><td>18</td><td>Pin plunger with boot seal</td></tr> <tr><td>27</td><td>Pin plunger/panel mount</td></tr> <tr><td>28</td><td>Roller plunger/panel mount</td></tr> <tr><td>29</td><td>Cross roller/panel mount</td></tr> <tr><td>30</td><td>Pin plunger/panel mount w/ boot seal</td></tr> </table>	1	Pin plunger	2	Roller plunger	3	Cross-roller plunger	16	Side rotary	18	Pin plunger with boot seal	27	Pin plunger/panel mount	28	Roller plunger/panel mount	29	Cross roller/panel mount	30	Pin plunger/panel mount w/ boot seal	<table border="1"> <tr><td>P</td><td>1NO/1NC positive opening, snap action</td></tr> <tr><td>S</td><td>1NO/1NC positive opening, BBM</td></tr> </table>	P	1NO/1NC positive opening, snap action	S	1NO/1NC positive opening, BBM	<table border="1"> <tr><td>1</td><td>1 m [3.28 ft]</td></tr> <tr><td>2</td><td>2 m [6.56 ft]</td></tr> <tr><td>3</td><td>3 m [9.84 ft]</td></tr> <tr><td>5</td><td>5 m [16.40 ft]</td></tr> </table>	1	1 m [3.28 ft]	2	2 m [6.56 ft]	3	3 m [9.84 ft]	5	5 m [16.40 ft]	<table border="1"> <tr><td>B</td><td>Bottom exit cable</td></tr> <tr><td>P</td><td>Plastic lever arm/ plastic roller</td></tr> </table>	B	Bottom exit cable	P	Plastic lever arm/ plastic roller	<table border="1"> <tr><td>Q</td><td>4-pin M12 connector</td></tr> </table>	Q	4-pin M12 connector
1	Pin plunger																																								
2	Roller plunger																																								
3	Cross-roller plunger																																								
16	Side rotary																																								
18	Pin plunger with boot seal																																								
27	Pin plunger/panel mount																																								
28	Roller plunger/panel mount																																								
29	Cross roller/panel mount																																								
30	Pin plunger/panel mount w/ boot seal																																								
P	1NO/1NC positive opening, snap action																																								
S	1NO/1NC positive opening, BBM																																								
1	1 m [3.28 ft]																																								
2	2 m [6.56 ft]																																								
3	3 m [9.84 ft]																																								
5	5 m [16.40 ft]																																								
B	Bottom exit cable																																								
P	Plastic lever arm/ plastic roller																																								
Q	4-pin M12 connector																																								



WARNING

IF USED IN APPLICATIONS CONCERNING HUMAN SAFETY

- Only use NC direct opening ("positive opening"/"positive break") contacts, identified by the symbol .
- Do NOT use flexible/adjustable actuators. Only use actuators designed for safety applications.
- Do NOT defeat, tamper, remove, or bypass this switch.
- Hazardous voltage, disconnect power before servicing.
- Strictly adhere to all installation and maintenance instructions
- Consult with local safety agencies and their requirements when designing a machine-control link, interface, and all control elements that affect safety.

Failure to comply with these instructions could result in death or serious injury.



WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.



WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

SALES AND SERVICE

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

E-mail: info.sc@honeywell.com

Internet: www.honeywell.com/sensing

Phone and Fax:

Asia Pacific	+65 6355-2828; +65 6445-3033 Fax
Europe	+44 (0) 1698 481481; +44 (0) 1698 481676 Fax
Latin America	+1-305-805-8188; +1-305-883-8257 Fax
USA/Canada	+1-800-537-6945; +1-815-235-6847 +1-815-235-6545 Fax

Sensing and Control
Honeywell
1985 Douglas Drive North
Minneapolis, MN 55422
www.honeywell.com/sensing

002311-1-EN IL50 GLO Printed in USA
May 2007
Copyright © 2007 Honeywell International Inc. All rights reserved.

Honeywell