

# LMH6657,LMH6658

*LMH6657/LMH6658 270MHz Single Supply, Single & Dual Amplifiers*



Literature Number: SNOSA35E

# LMH6657/LMH6658

## 270MHz Single Supply, Single & Dual Amplifiers

### General Description

The LMH6657/6658 are low-cost operational amplifiers that operate from a single supply with input voltage range extending below the  $V^-$ . Based on easy to use voltage feedback topology and boasting fast slew rate (700V/ $\mu$ s) and high speed (140MHz GBWP), the LMH6657 (Single) and LMH6658 (dual) can be used in high speed large signal applications. These applications include instrumentation, communication devices, set-top boxes, etc.

With a -3dB BW of 100MHz ( $A_v = +2$ ) and DG & DP of 0.03% & 0.10° respectively, the LMH6657/6658 are well suited for video applications. The output stage can typically supply 80mA into the load with a swing of about 1V from either rail.

For Industrial applications, the LMH6657/6658 are excellent cost-saving choices. Input referred voltage noise is low and the input voltage can extend below  $V^-$  to ease amplification of low level signals that could be at or near the system ground. With low distortion and fast settling, LMH6657/6658 can provide buffering for A/D and D/A applications.

The LMH6657/6658 versatility and ease of use is extended even further by offering these high slew rate, high speed Op Amps in miniature packages such as SOT23-5, SC70, SOIC-8, and MSOP-8. Refer to the Ordering Information section for packaging options available for each device.

### Features

$V_S = 5V$ ,  $T_A = 25^\circ C$ ,  $R_L = 100\Omega$  (Typical values unless specified)


- -3dB BW ( $A_v = +1$ ) 270MHz
- Supply voltage range 3V to 12V
- Slew rate, ( $V_S = \pm 5V$ ) 700V/ $\mu$ s
- Supply current 6.2mA/amp
- Output current +80/-90mA
- Input common mode volt. 0.5V beyond  $V^-$ , 1.7V from  $V^+$
- Output voltage swing ( $R_L = 2k\Omega$ ) 0.8V from rails
- Input voltage noise 11nV/ $\sqrt{Hz}$
- Input current noise 2.1pA/ $\sqrt{Hz}$
- DG error 0.03%
- DP error 0.10°
- THD (5MHz) -55dBc
- Settling time (0.1%) 37ns
- Fully characterized for 5V, and  $\pm 5V$
- Output overdrive recovery 18ns
- Output short circuit protected (Note 10)
- No output phase reversal with CMVR exceeded

### Applications

- CD/DVD ROM
- ADC buffer amp
- Portable video
- Current sense buffer
- Portable communications

### Connection Diagrams


SOT23-5/SC70-5 (LMH6657)

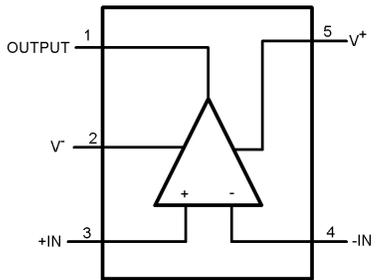

Top View

20053261

SOIC-8/MSOP-8 (LMH6658)

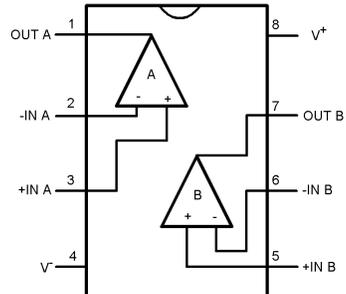

20053263

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

ESD Tolerance	
Human Body Model	2KV (Note 2)
Machine Model	200V (Note 9)
$V_{IN}$ Differential	$\pm 2.5V$
Output Short Circuit Duration	(Note 3), (Note 11)
Input Current	$\pm 10mA$
Supply Voltage ( $V^+ - V^-$ )	12.6V
Voltage at Input/Output pins	$V^+ + 0.8V, V^- - 0.8V$
Soldering Information	
Infrared or Convection (20 sec.)	235°C

Wave Soldering (10 sec.)	260°C
Storage Temperature Range	-65°C to +150°C
Junction Temperature (Note 4)	+150°C

**Operating Ratings** (Note 1)

Supply Voltage ( $V^+ - V^-$ )	3V to 12V
Operating Temperature Range (Note 4)	-40°C to +85°C
Package Thermal Resistance ( $\theta_{JA}$ ) (Note 4)	
SC70	478°C/W
SOT23-5	265°C/W
MSOP-8	235°C/W
SOIC-8	190°C/W

**5V Electrical Characteristics**

Unless otherwise specified, all limits guaranteed for at  $T_J = 25^\circ C$ ,  $V^+ = 5V$ ,  $V^- = 0V$ ,  $V_{CM} = V_O = V^+/2$ , and  $R_L = 100\Omega$  (or as specified) tied to  $V^+/2$ . **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
GB	Gain Bandwidth Product	$V_{OUT} < 200mV_{PP}$		140		MHz
SSBW	-3dB BW	$A_V = +1, V_{OUT} = 200mV_{PP}$	220	270		MHz
		$A_V = +2$ or $-1, V_{OUT} = 200mV_{PP}$		100		
GFP	Frequency Response Peaking	$A_V = +2, V_{OUT} = 200mV_{PP}$ , DC to 100MHz		1.5		dB
GFR	Frequency Response Rolloff	$A_V = +2, V_{OUT} = 200mV_{PP}$ , DC to 100MHz		0.5		dB
LPD <sub>1°</sub>	1° Linear Phase Deviation	$A_V = +2, V_{OUT} = 200mV_{PP}, \pm 1^\circ$		30		MHz
GF <sub>0.1dB</sub>	0.1dB Gain Flatness	$A_V = +2, \pm 0.1dB, V_{OUT} = 200mV_{PP}$		13		MHz
PBW	Full Power Bandwidth	-1dB, $V_{OUT} = 3V_{PP}, A_V = -1$		55		MHz
DG	Differential Gain	NTSC, $V_{CM} = 2V, R_L = 150\Omega$ to $V^+/2$ , Pos. Video Only		0.03		%
DP	Differential Phase	NTSC, $V_{CM} = 2V, R_L = 150\Omega$ to $V^+/2$ Pos. Video Only		0.1		deg

**Time Domain Response**

$t_r$	Rise and Fall Time	$A_V = +2, V_{OUT} = 500mV_{PP}$		3.3		ns
		$A_V = -1, V_{OUT} = 500mV_{PP}$		3.4		
OS	Overshoot, Undershoot	$A_V = +2, V_{OUT} = 500mV_{PP}$		18		%
$t_s$	Settling Time	$V_O = 2V_{PP}, \pm 0.1\%, R_L = 500\Omega$ to $V^+/2, A_V = -1$		37		ns
SR	Slew Rate (Note 8)	$A_V = -1, V_O = 3V_{PP}$ (Note 13)		470		V/ $\mu s$
		$A_V = +2, V_O = 3V_{PP}$ (Note 13)		420		

**Distortion and Noise Response**

HD2	2 <sup>nd</sup> Harmonic Distortion	$f = 5MHz, V_O = 2V_{PP}, A_V = -1$		-70		dBc
HD3	3 <sup>rd</sup> Harmonic Distortion	$f = 5MHz, V_O = 2V_{PP}, A_V = -1$		-57		dBc
THD	Total Harmonic Distortion	$f = 5MHz, V_O = 2V_{PP}, A_V = -1$		-55.5		dBc
$V_n$	Input-Referred Voltage Noise	$f = 100KHz$		11		nV/ $\sqrt{Hz}$
		$f = 1KHz$		19		
$I_n$	Input-Referred Current Noise	$f = 100KHz$		2.1		pA/ $\sqrt{Hz}$
		$f = 1KHz$		7.5		
XTLKA	Cross-Talk Rejection (LMH6658)	$f = 5MHz, R_L (SND) = 100\Omega$ RCV: $R_F = R_G = 1k$		69		dB

**Static, DC Performance**

**5V Electrical Characteristics** (Continued)

Unless otherwise specified, all limits guaranteed for at  $T_J = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{\text{CM}} = V_O = V^+/2$ , and  $R_L = 100\Omega$  (or as specified) tied to  $V^+/2$ . **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
$A_{\text{VOL}}$	Large Signal Voltage Gain	$V_O = 1.25\text{V to } 3.75\text{V}$ , $R_L = 2\text{k to } V^+/2$	85	95		dB
		$V_O = 1.5\text{V to } 3.5\text{V}$ , $R_L = 150\Omega \text{ to } V^+/2$	75	85		
		$V_O = 2\text{V to } 3\text{V}$ , $R_L = 50\Omega \text{ to } V^+/2$	70	80		
CMVR	Input Common-Mode Voltage Range	CMRR $\geq 50\text{dB}$	-0.2 <b>-0.1</b>	-0.5		V
			3.0 <b>2.8</b>	3.3		
$V_{\text{OS}}$	Input Offset Voltage			$\pm 1.1$	$\pm 5$ <b><math>\pm 7</math></b>	mV
TC $V_{\text{OS}}$	Input Offset Voltage Average Drift	(Note 12)		$\pm 2$		$\mu\text{V}/\text{C}$
$I_{\text{B}}$	Input Bias Current	(Note 7)		-5	-20 <b>-30</b>	$\mu\text{A}$
TC $I_{\text{B}}$	Input Bias Current Average Drift	(Note 12)		0.01		$\text{nA}/\text{C}$
$I_{\text{OS}}$	Input Offset Current			50	300 <b>500</b>	nA
CMRR	Common Mode Rejection Ratio	$V_{\text{CM}}$ Stepped from 0V to 3.0V	72	82		dB
+PSRR	Positive Power Supply Rejection Ratio	$V^+ = 4.5\text{V to } 5.5\text{V}$ , $V_{\text{CM}} = 1\text{V}$	72	82		dB
$I_{\text{S}}$	Supply Current (per channel)	No load		6.2	8.5 <b>10</b>	mA
<b>Miscellaneous Performance</b>						
$V_{\text{OH}}$	Output Swing High	$R_L = 2\text{k to } V^+/2$	4.10 <b>3.8</b>	4.25		V
		$R_L = 150\Omega \text{ to } V^+/2$	4.00 <b>3.70</b>	4.19		
		$R_L = 75\Omega \text{ to } V^+/2$	3.85 <b>3.50</b>	4.15		
$V_{\text{OL}}$	Output Swing Low	$R_L = 2\text{k to } V^+/2$	900 <b>1100</b>	800		mV
		$R_L = 150\Omega \text{ to } V^+/2$	970 <b>1200</b>	870		
		$R_L = 75\Omega \text{ to } V^+/2$	990 <b>1250</b>	885		
$I_{\text{OUT}}$	Output Current	$V_{\text{OUT}} = 1\text{V}$ from either rail	$\pm 40$	+85, -105		mA
$I_{\text{SC}}$	Output Short Circuit Current (Note 10)	Sourcing to $V^+/2$	100 <b>80</b>	155		mA
		Sinking to $V^+/2$	100 <b>80</b>	220		
$R_{\text{IN}}$	Common Mode Input Resistance			3		$\text{M}\Omega$
$C_{\text{IN}}$	Common Mode Input Capacitance			1.8		pF
$R_{\text{OUT}}$	Output Impedance	$f = 1\text{MHz}$ , $A_v = +1$		0.06		$\Omega$

## ±5V Electrical Characteristics

Unless otherwise specified, all limits guaranteed for at  $T_J = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = -5\text{V}$ ,  $V_{\text{CM}} = V_O$ , and  $R_L = 100\Omega$  (or as specified) tied to 0V. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
GB	Gain Bandwidth Product	$V_{\text{OUT}} < 200\text{mV}_{\text{PP}}$		140		MHz
SSBW	-3dB BW	$A_V = +1$ , $V_{\text{OUT}} = 200\text{mV}_{\text{PP}}$	220	270		MHz
		$A_V = +2$ or $-1$ , $V_{\text{OUT}} = 200\text{mV}_{\text{PP}}$		100		
GFP	Frequency Response Peaking	$A_V = +2$ , $V_{\text{OUT}} = 200\text{mV}_{\text{PP}}$ , DC to 100MHz		1.0		dB
GFR	Frequency Response Rolloff	$A_V = +2$ , $V_{\text{OUT}} = 200\text{mV}_{\text{PP}}$ , DC to 100MHz		0.9		dB
LPD <sub>1°</sub>	1° Linear Phase Deviation	$A_V = +2$ , $V_{\text{OUT}} = 200\text{mV}_{\text{PP}}$ , $\pm 1^\circ$		30		MHz
GF <sub>0.1dB</sub>	0.1dB Gain Flatness	$A_V = +2$ , $\pm 0.1\text{dB}$ , $V_{\text{OUT}} = 200\text{mV}_{\text{PP}}$		20		MHz
PBW	Full Power Bandwidth	-1dB, $V_{\text{OUT}} = 8V_{\text{PP}}$ , $A_V = -1$		30		MHz
DG	Differential Gain	NTSC, $R_L = 150\Omega$ , Pos. or Neg. Video		0.03		%
DP	Differential Phase	NTSC, $R_L = 150\Omega$ , Pos. or Neg. Video		0.1		deg
<b>Time Domain Response</b>						
$t_r$	Rise and Fall Time	$A_V = +2$ , $V_{\text{OUT}} = 500\text{mV}_{\text{PP}}$		3.3		ns
		$A_V = -1$ , $V_{\text{OUT}} = 500\text{mV}_{\text{PP}}$		3.3		
OS	Overshoot, Undershoot	$A_V = +2$ , $V_{\text{OUT}} = 500\text{mV}_{\text{PP}}$		16		%
$t_s$	Settling Time	$V_O = 5V_{\text{PP}}$ , $\pm 0.1\%$ , $R_L = 500\Omega$ , $A_V = -1$		35		ns
SR	Slew Rate (Note 8)	$A_V = -1$ , $V_O = 8V_{\text{PP}}$		700		V/ $\mu\text{s}$
		$A_V = +2$ , $V_O = 8V_{\text{PP}}$		500		
<b>Distortion and Noise Response</b>						
HD2	2 <sup>nd</sup> Harmonic Distortion	$f = 5\text{MHz}$ , $V_O = 2V_{\text{PP}}$ , $A_V = -1$		-70		dBc
HD3	3 <sup>rd</sup> Harmonic Distortion	$f = 5\text{MHz}$ , $V_O = 2V_{\text{PP}}$ , $A_V = -1$		-57		dBc
THD	Total Harmonic Distortion	$f = 5\text{MHz}$ , $V_O = 2V_{\text{PP}}$ , $A_V = -1$		-55.5		dBc
$V_n$	Input-Referred Voltage Noise	$f = 100\text{KHz}$		11		nV/ $\sqrt{\text{Hz}}$
		$f = 1\text{KHz}$		19		
$I_n$	Input-Referred Current Noise	$f = 100\text{KHz}$		2.1		pA/ $\sqrt{\text{Hz}}$
		$f = 1\text{KHz}$		7.5		
XTLKA	Cross-Talk Rejection (LMH6658)	$f = 5\text{MHz}$ , $R_L$ (SND) = 100 $\Omega$ RCV: $R_F = R_G = 1\text{k}$		69		dB
<b>Static, DC Performance</b>						
$A_{\text{VOL}}$	Large Signal Voltage Gain	$V_O = -3.75\text{V}$ to $3.75\text{V}$ , $R_L = 2\text{k}$	87	100		dB
		$V_O = -3.5\text{V}$ to $3.5\text{V}$ , $R_L = 150\Omega$	80	90		
		$V_O = -3\text{V}$ to $3\text{V}$ , $R_L = 50\Omega$	75	85		
CMVR	Input Common-Mode Voltage Range	CMRR $\geq 50\text{dB}$	-5.2	-5.5		V
			<b>-5.1</b>			
			3.0	3.3		
		<b>2.8</b>				
$V_{\text{OS}}$	Input Offset Voltage			$\pm 1.0$	$\pm 5$ <b><math>\pm 7</math></b>	mV
TC $V_{\text{OS}}$	Input Offset Voltage Average Drift	(Note 12)		$\pm 2$		$\mu\text{V}/\text{C}$
$I_B$	Input Bias Current	(Note 7)		-5	-20 <b>-30</b>	$\mu\text{A}$
TC $I_B$	Input Bias Current Average Drift	(Note 12)		0.01		nA/ $^\circ\text{C}$

**±5V Electrical Characteristics** (Continued)

Unless otherwise specified, all limits guaranteed for at  $T_J = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = -5\text{V}$ ,  $V_{CM} = V_O$ , and  $R_L = 100\Omega$  (or as specified) tied to 0V. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
$I_{OS}$	Input Offset Current			50	300 <b>500</b>	nA
CMRR	Common Mode Rejection Ratio	$V_{CM}$ Stepped from $-5\text{V}$ to $3.0\text{V}$	75	84		dB
+PSRR	Positive Power Supply Rejection Ratio	$V^+ = 4.5\text{V}$ to $5.5\text{V}$ , $V_{CM} = -4\text{V}$	75	82		dB
-PSRR	Negative Power Supply Rejection Ratio	$V^- = -4.5\text{V}$ to $-5.5\text{V}$	78	85		dB
$I_S$	Supply Current (per channel)	No load		6.5	9.0 <b>11</b>	mA
<b>Miscellaneous Performance</b>						
$V_{OH}$	Output Swing High	$R_L = 2\text{k}$	4.10 <b>3.80</b>	4.25		V
		$R_L = 150\Omega$	4.00 <b>3.70</b>	4.20		
		$R_L = 75\Omega$	3.85 <b>3.50</b>	4.18		
$V_{OL}$	Output Swing Low	$R_L = 2\text{k}$	-4.05 <b>-3.80</b>	-4.19		V
		$R_L = 150\Omega$	-3.90 <b>-3.65</b>	-4.05		
		$R_L = 75\Omega$	-3.80 <b>-3.50</b>	-4.00		
$I_{OUT}$	Output Current	$V_{OUT} = 1\text{V}$ from either rail	$\pm 45$	+100, -110		mA
$I_{SC}$	Output Short Circuit Current (Note 10)	Sourcing to Ground	120 <b>100</b>	180		mA
		Sinking to Ground	120 <b>100</b>	230		
$R_{IN}$	Common Mode Input Resistance			4		$M\Omega$
$C_{IN}$	Common Mode Input Capacitance			1.8		pF
$R_{OUT}$	Output Impedance	$f = 1\text{MHz}$ , $A_V = +1$		0.06		$\Omega$

**Note 1:** Note 1: Absolute maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics.

**Note 2:** Human body model, 1.5k $\Omega$  in series with 100pF.

**Note 3:** Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C.

**Note 4:** The maximum power dissipation is a function of  $T_{J(MAX)}$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_D = (T_{J(MAX)} - T_A) / \theta_{JA}$ . All numbers apply for packages soldered directly onto a PC board.

**Note 5:** Typical values represent the most likely parametric norm.

**Note 6:** All limits are guaranteed by testing or statistical analysis.

**Note 7:** Positive current corresponds to current flowing into the device.

**Note 8:** Slew rate is the "worst case" of the rising and falling slew rates.

**Note 9:** Machine Model, 0 $\Omega$  in series with 200pF.

**Note 10:** Short circuit test is a momentary test. See Note 11.

**Note 11:** Output short circuit duration is infinite for  $V_S < 6V$  at room temperature and below. For  $V_S > 6V$ , allowable short circuit duration is 1.5ms.

**Note 12:** Drift determined by dividing the change in parameter at temperature extremes by the total temperature change.


**Note 13:** Output Swing not limited by Slew Rate limit.

## Ordering Information


Package	Part Number	Package Marking	Transport Media	NSC Drawing
SOT23-5	LMH6657MF	A85A	1k Units Tape and Reel	MF05A
	LMH6657MFX		3k Units Tape and Reel	
SC70-5	LMH6657MG	A76	1k Units Tape and Reel	MAA05A
	LMH6657MGX		3k Units Tape and Reel	
SOIC-8	LMH6658MA	LMH6658MA	Rails	M08A
	LMH6658MAX		2.5k Units Tape and Reel	
MSOP-8	LMH6658MM	A88A	1k Units Tape and Reel	MUA08A
	LMH6658MMX		3.5k Units Tape and Reel	

# Typical Performance Characteristics


**Non-Inverting Frequency Response, Gain**

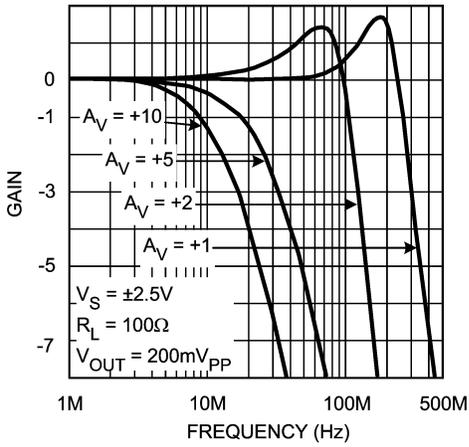


**Inverting Frequency Response, Gain**

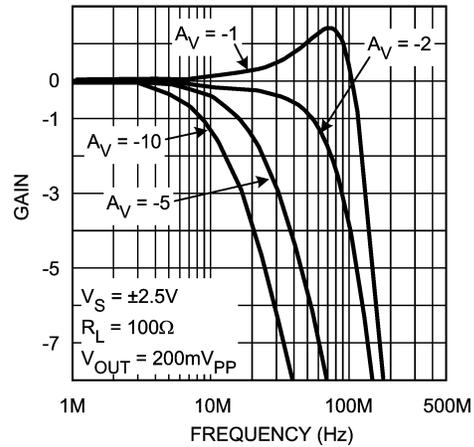


**Non-Inverting Frequency Response, Phase**

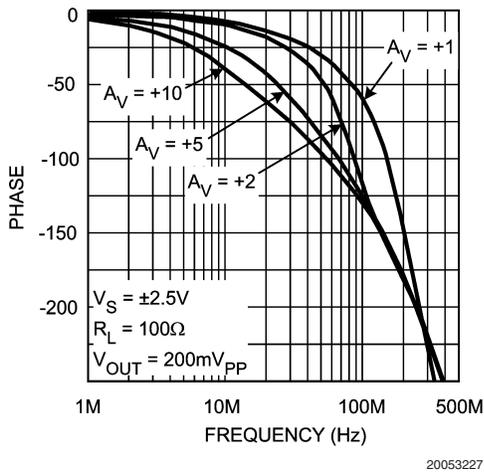


**Inverting Frequency Response, Phase**

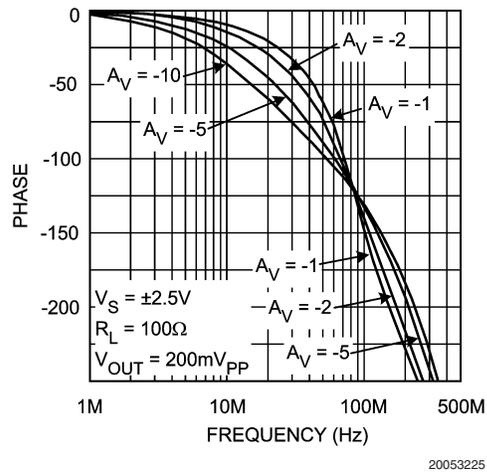

**Open Loop Gain/Phase vs. Frequency**

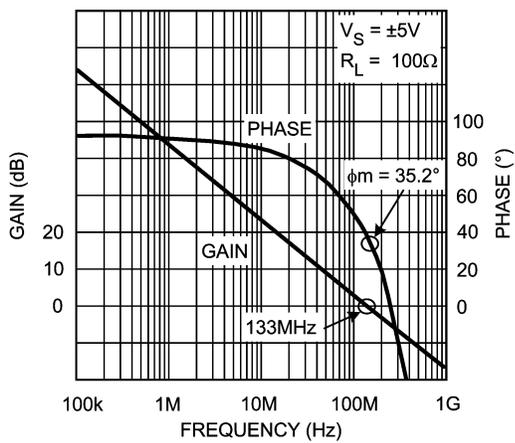


**Unity Gain Frequency vs. VCM**

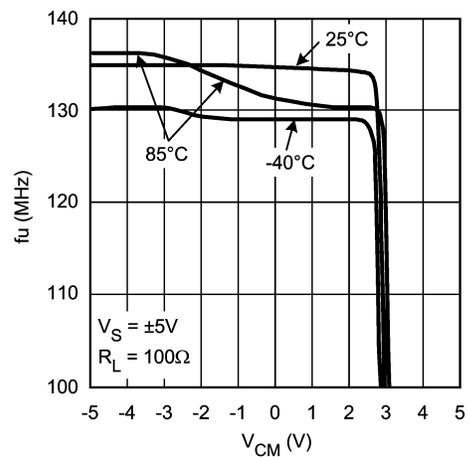


Typical Performance Characteristics (Continued)

Phase Margin vs.  $V_{CM}$

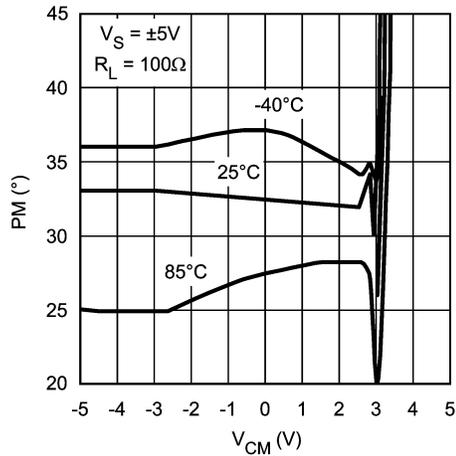


20053242

Output vs. Input

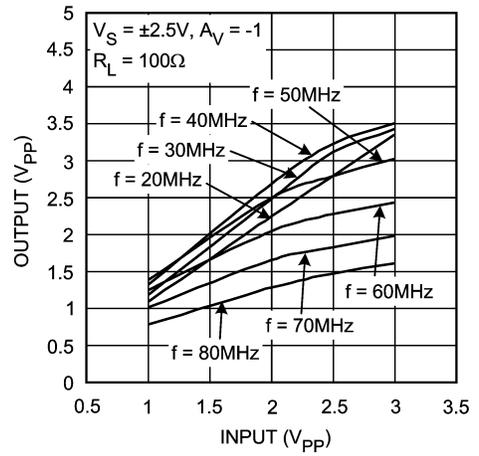


20053204

Output vs. Input

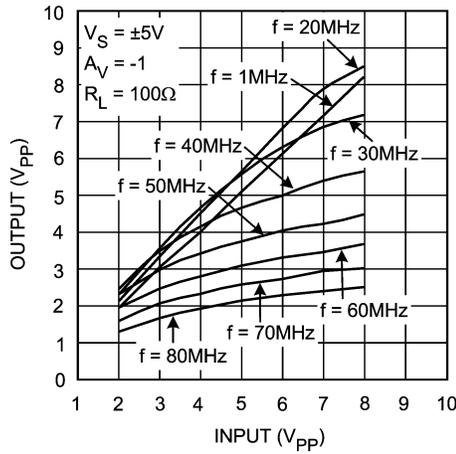


20053203

CMRR vs. Frequency

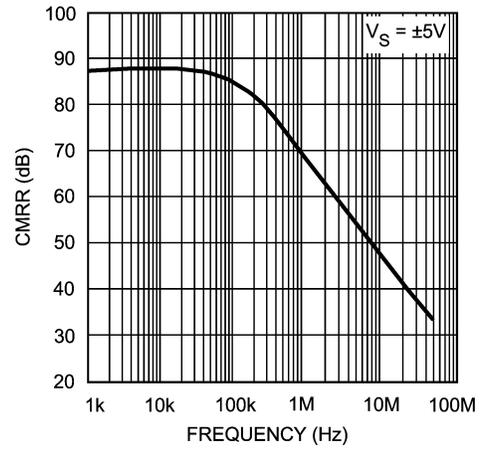


20053206

PSRR vs. Frequency

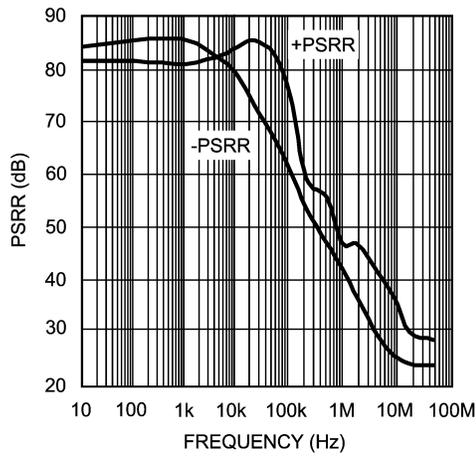


20053201

DG/DP vs. IRE

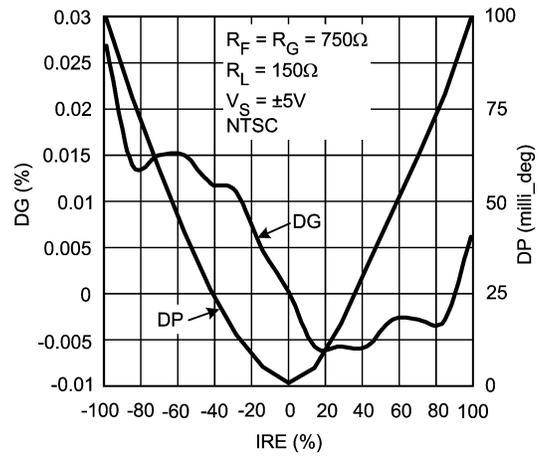


20053211


# Typical Performance Characteristics (Continued)

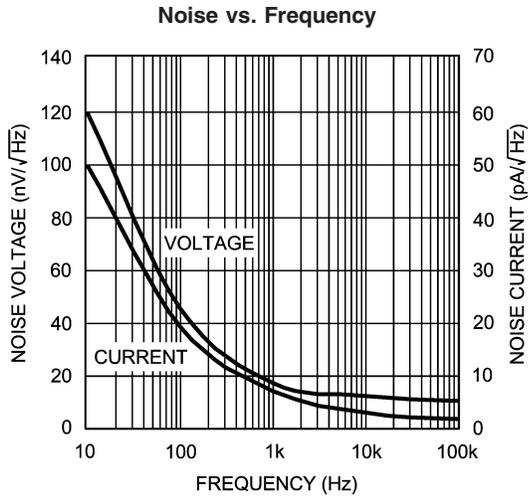


20053202

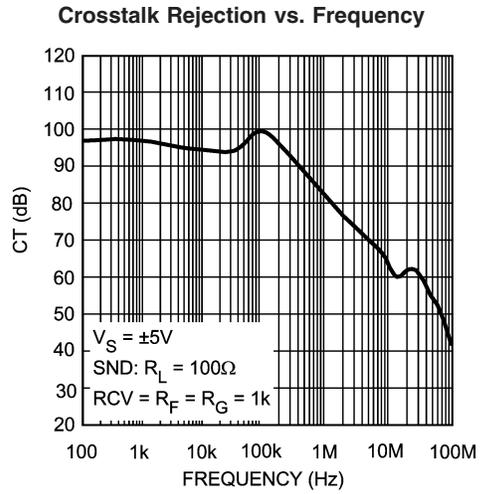


20053205

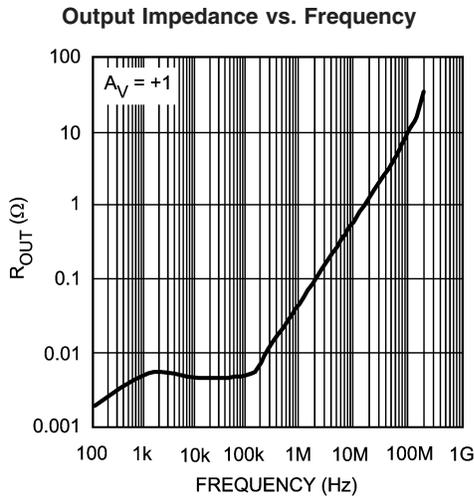


20053210

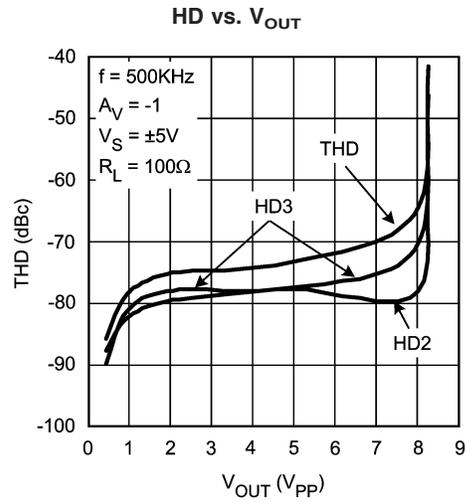

20053213

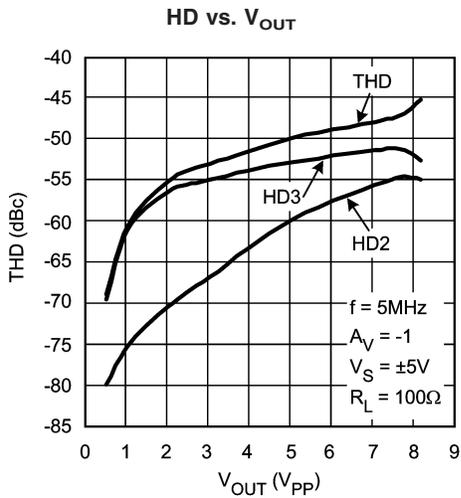


20053212

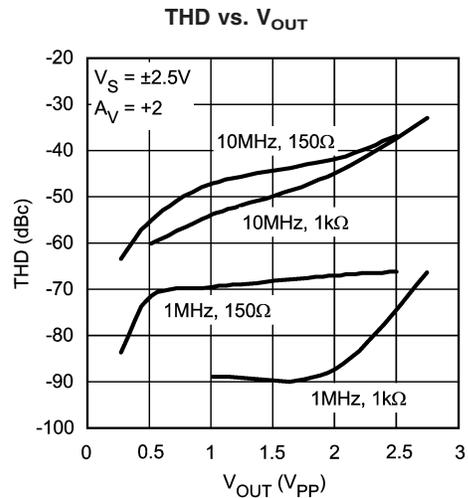

20053253


Typical Performance Characteristics (Continued)

HD vs. Frequency

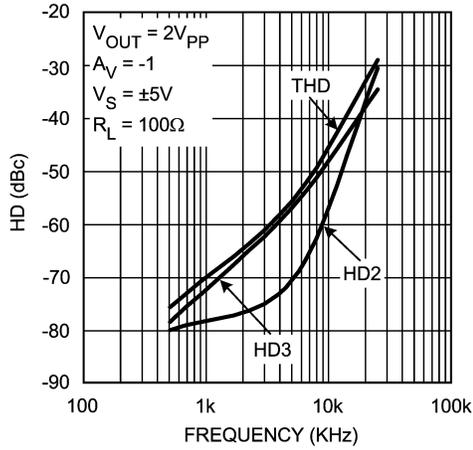


20053214

HD vs. Frequency

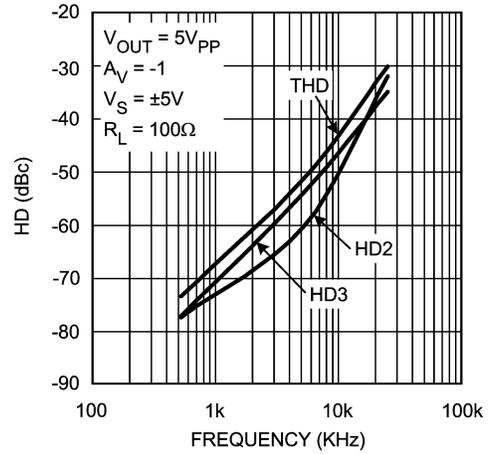


20053215

V<sub>OUT</sub> vs. I<sub>SOURCE</sub>

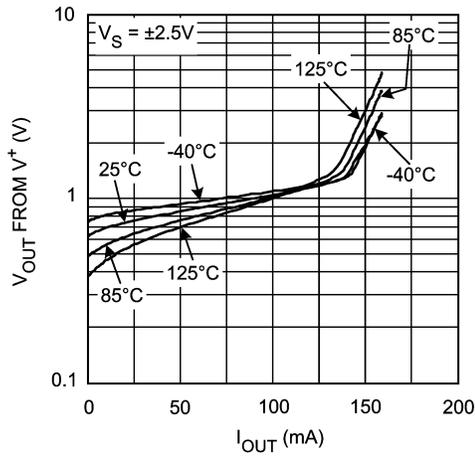


20053243

V<sub>OUT</sub> vs. I<sub>SINK</sub>

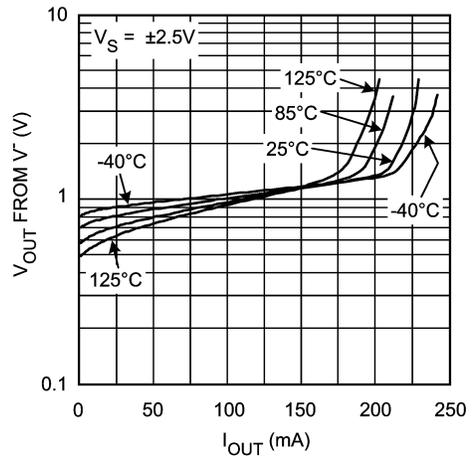


20053244

V<sub>OUT</sub> vs. I<sub>SOURCE</sub>

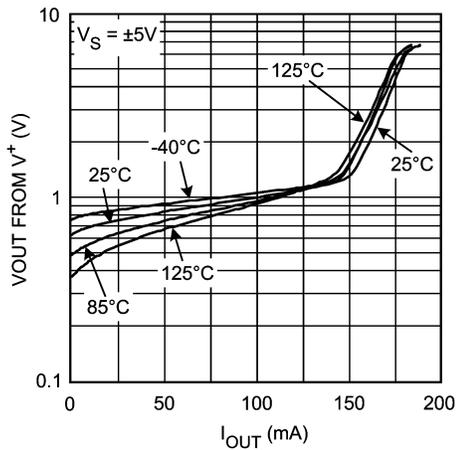


20053245

V<sub>OUT</sub> vs. I<sub>SINK</sub>

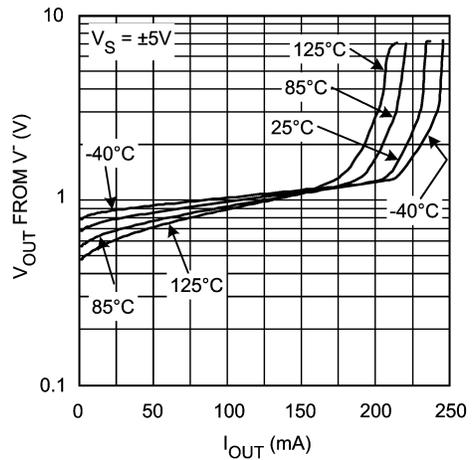


20053246

Typical Performance Characteristics (Continued)

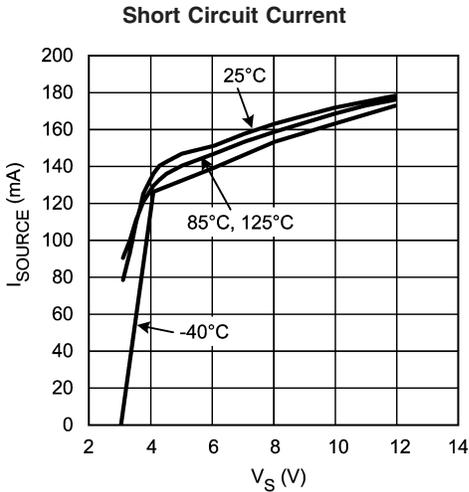


20053230

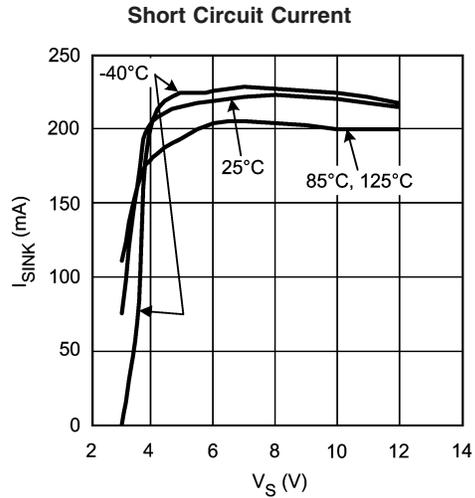


20053231

Settling Time vs. Output Step Amplitude

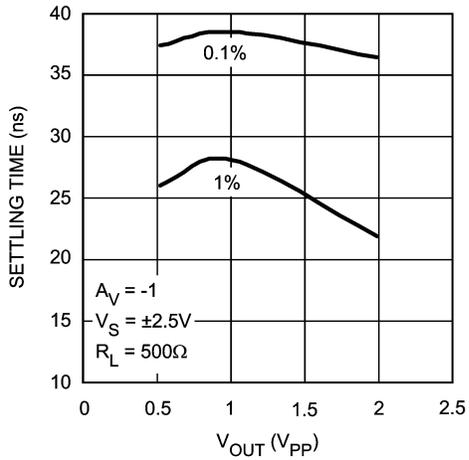


20053208

Settling Time vs. Output Step Amplitude

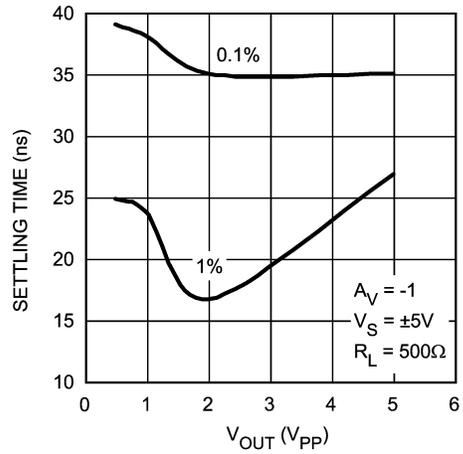


20053207

0.1% Settling Time vs. Cap Load

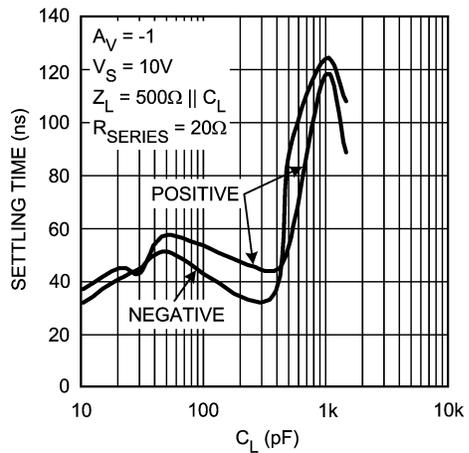


20053209

$\Delta V_{OS}$  vs.  $V_{OUT}$

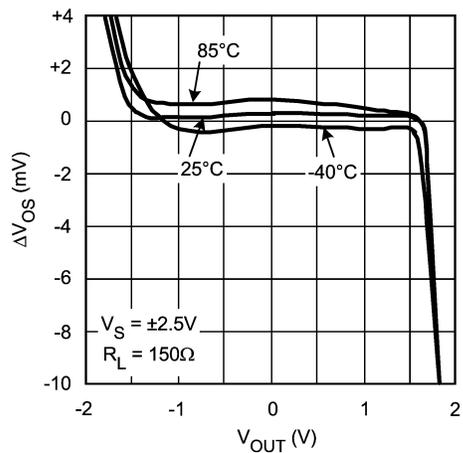


20053240


Typical Performance Characteristics (Continued)

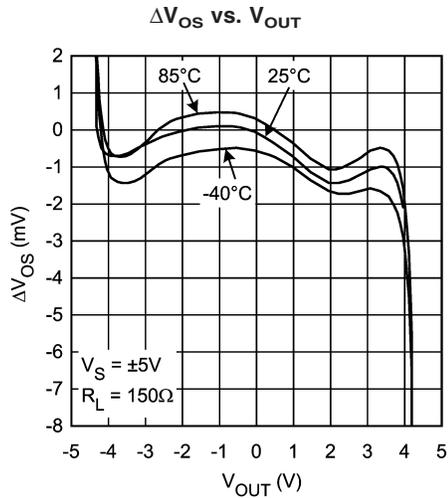


20053239

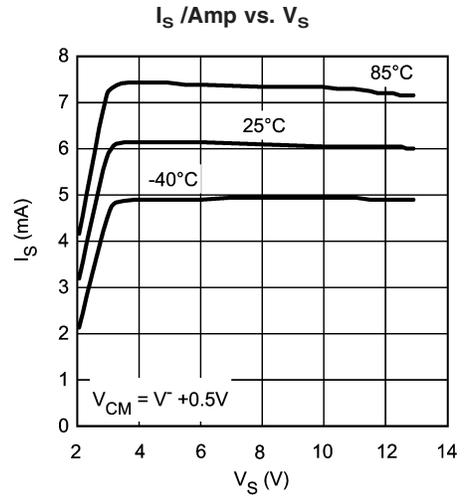


20053232

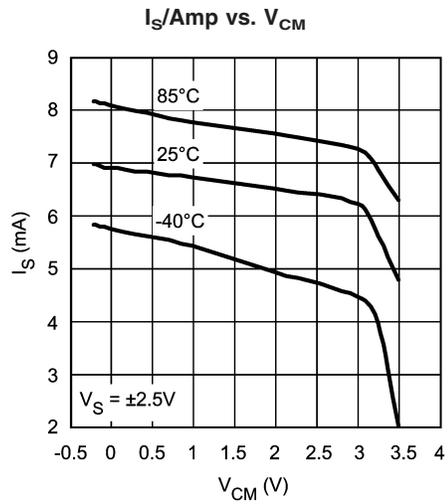


20053238

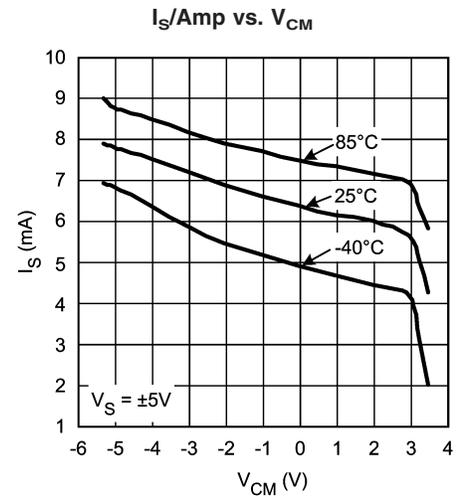

20053237

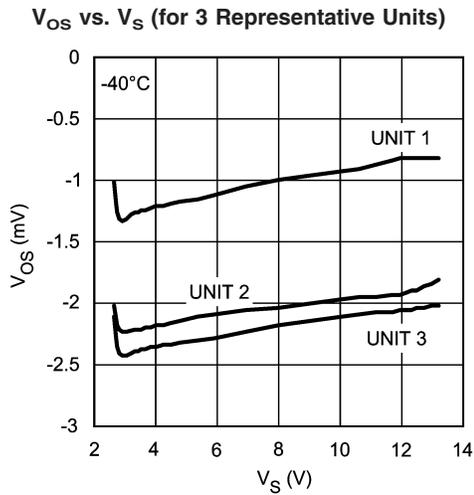


20053234

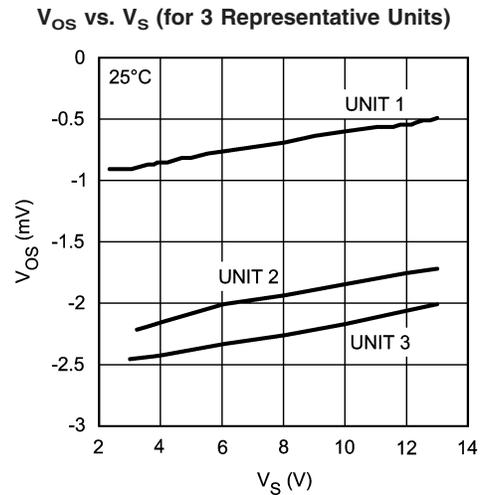

20053233


Typical Performance Characteristics (Continued)

$V_{OS}$  vs.  $V_S$  (for 3 Representative Units)

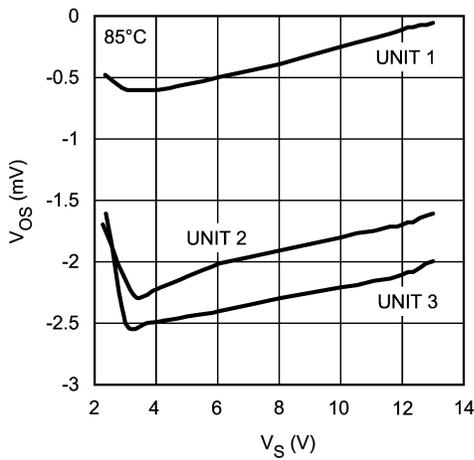


20053235

$V_{OS}$  vs.  $V_{CM}$  (A Typical Unit)

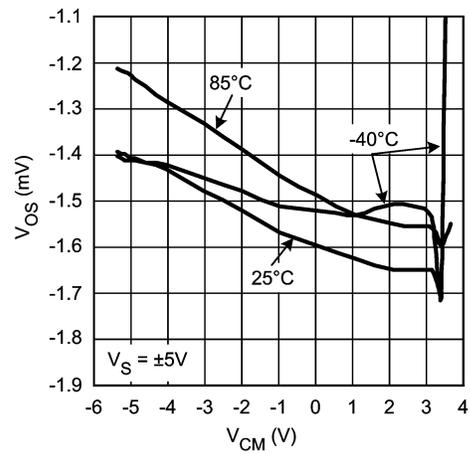


20053236

$|I_B|$  vs.  $V_S$

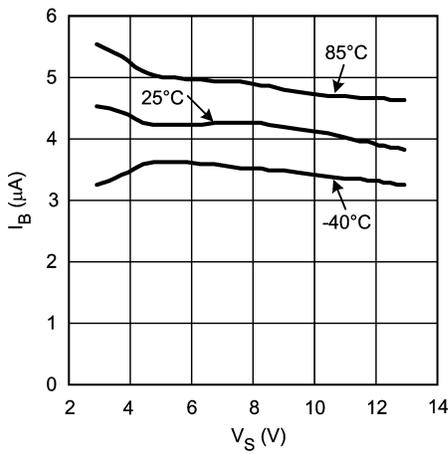


20053228

$I_{OS}$  vs.  $V_S$

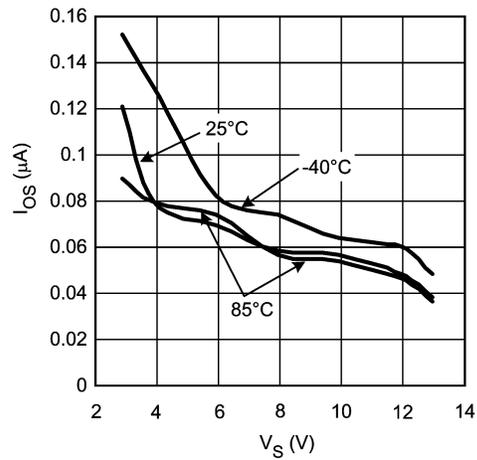


20053229

Small Signal Step Response

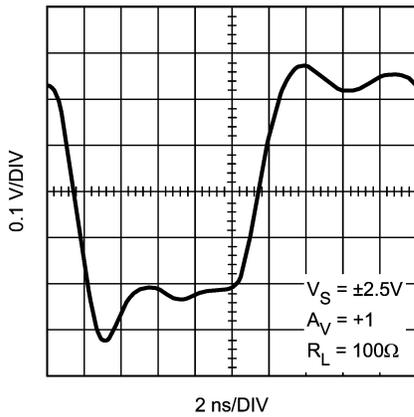

20053222


Small Signal Step Response

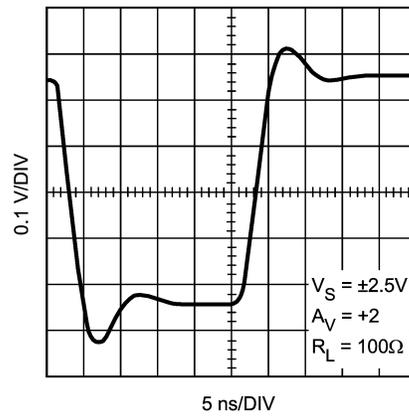

20053220


# Typical Performance Characteristics (Continued)

**Small Signal Step Response**

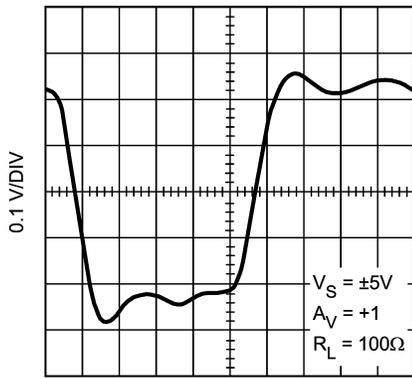


20053216

**Small Signal Step Response**

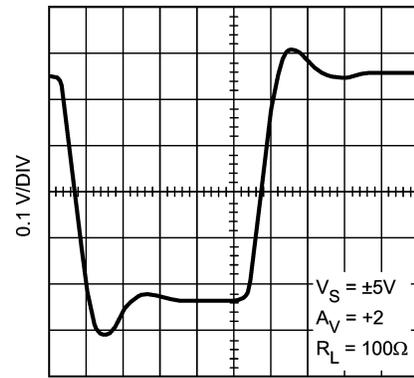


20053221

**Large Signal Step Response**

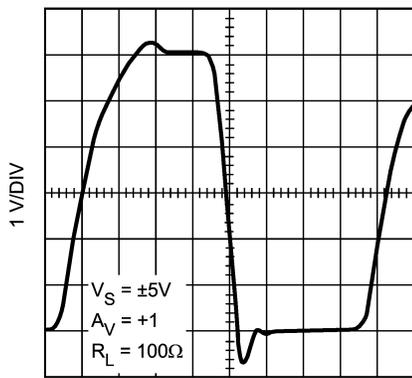


20053217

**Large Signal Step Response**

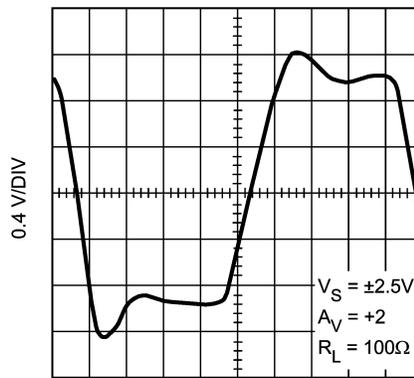

20053219

**Large Signal Step Response**

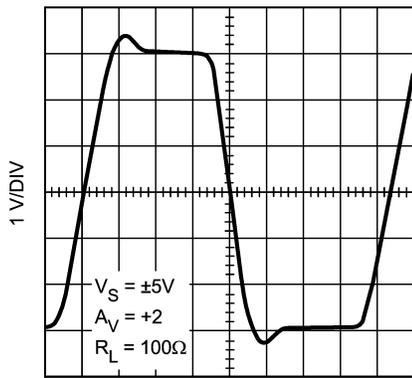


20053218

## Application Section

### LARGE SIGNAL BEHAVIOR

The LMH6657/6658 is specially designed to handle large output swings, such as those encountered in video waveforms, without being slew rate limited. With 5V supply, the LMH6657/6658 slew rate limit is larger than that might be necessary to make full allowable output swing excursions. Therefore, the large signal frequency response is dominated by the small signal characteristics, rather than the conventional limitation imposed by slew rate limit.

The LMH6657/6658 input stage is designed to provide excess overdrive when needed. This occurs when fast input signal excursions cannot be followed by the output stage. In these situations, the device encounters larger input signals than would be encountered under normal closed loop conditions. The LMH6657/6658 input stage is designed to take advantage of this "input overdrive" condition. The larger the amount of this overdrive, the greater is the speed with which the output voltage can change. Here is a plot of how the output slew rate limitation varies with respect to the amount of overdrive imposed on the input:

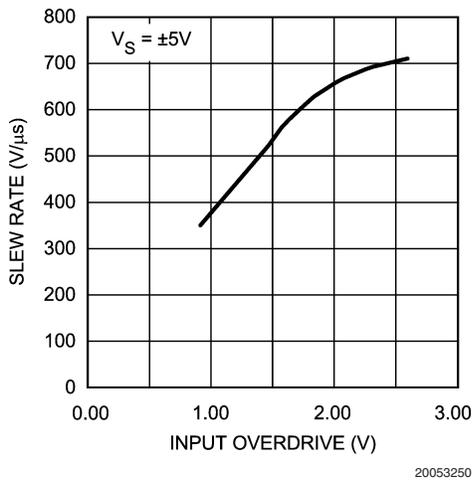


**FIGURE 1. Plot Showing the Relationship Between Slew Rate and Input Overdrive**

To relate the explanation above to a practical example, consider the following application example. Consider the case of a closed loop amplifier with a gain of  $-1$  amplifying a sinusoidal waveform. From the plot of Output vs. Input (Typical Performance Characteristics section), with a 30MHz signal and  $7V_{PP}$  input signal, it can be seen that the output will be limited to a swing of  $6.9V_{PP}$ . From the frequency Response plot it can be seen that the inverting gain of  $-1$  has a  $-32^\circ$  output phase shift at this frequency. It can be shown that this setup will result in about  $1.9V_{PP}$  differential input voltage corresponding to  $650V/\mu s$  of slew rate from Figure 1, above ( $SR = V_O(pp) \cdot \pi \cdot f = 650V/\mu s$ ). Note that the amount of overdrive appearing on the input for a given sinusoidal test waveform is affected by the following:


- Output swing
- Gain setting
- Input/output phase relationship for the given test frequency
- Amplifier configuration (inverting or non-inverting)

Due to the higher frequency phase shift between input and output, there is no closed form solution to input overdrive for a given input. Therefore, Figure 1 is not very useful by itself in determining the output swing.

The following plots aid in predicting the output transition time based on the amount of swing required for a given gain setting.

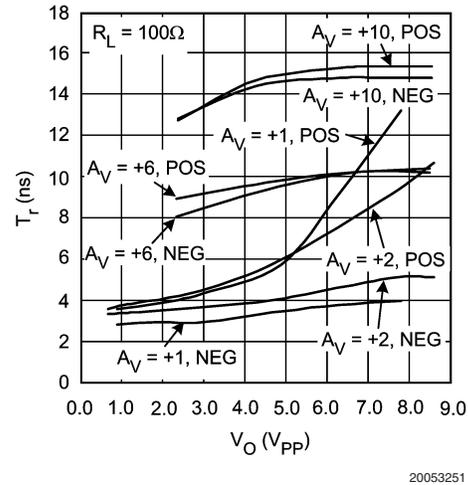

**FIGURE 2. Output 20%-80% Transition vs. Output Voltage Swing (Non-Inverting Gain)**

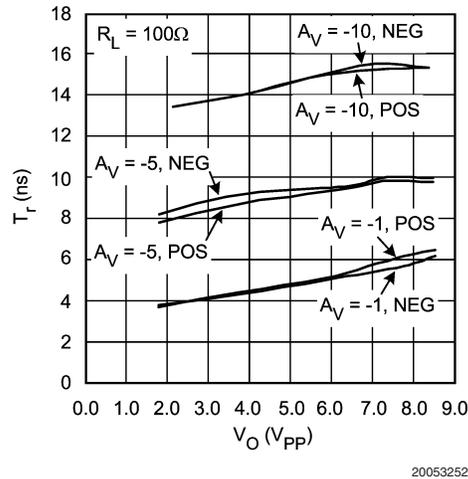

**FIGURE 3. Output 20%-80% Transition vs. Output Voltage Swing (Inverting Gain)**

Beyond a gain of 5 or so, the LMH6657/6658 output transition would be limited by bandwidth. For example, with a gain of 5, the  $-3dB$  BW would be around 30MHz corresponding to a rise time of about 12ns (10% - 90%). Assuming a near linear transition, the 20%-80% transition time would be around 9ns which matches the measured results as shown in Figure 2.

When the output is heavily loaded, output swing may be limited by current capability of the device. Refer to "Output Current Capability" section, below, for more details.

## Output Characteristics

### OUTPUT CURRENT CAPABILITY

The LMH6657/6658 output swing for a given load can be determined by referring to the Output Voltage vs. Output Current plots (Typical Performance Characteristics section). Characteristic Tables show the output current when the output is 1V from either rail. The plots and table values can be used to predict closed loop continuous value of current for a given load. If left unchecked, the output current capability of the LMH6657/6658 could easily result in junction temperature exceeding the maximum allowed value specified under Absolute Maximum Ratings. Proper heat sinking or other precautions are required if conditions as such, exist.

Under transient conditions, such as when the input voltage makes a large transition and the output has not had time to reach its final value, the device can deliver output currents in excess of the typical plots mentioned above. Plots shown in *Figure 5* and below, depict how the output current capability improves under higher input overdrive voltages:

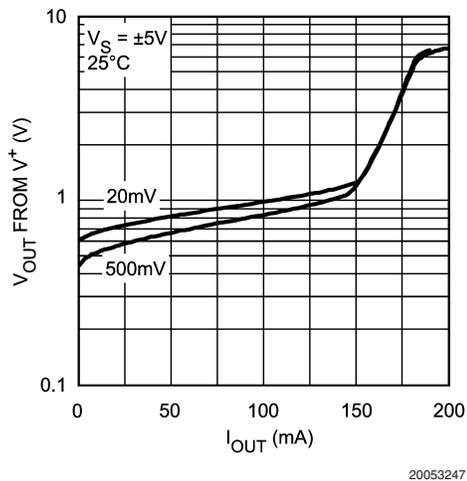


FIGURE 4.  $V_{OUT}$  vs.  $I_{SOURCE}$  (for Various Overdrive)

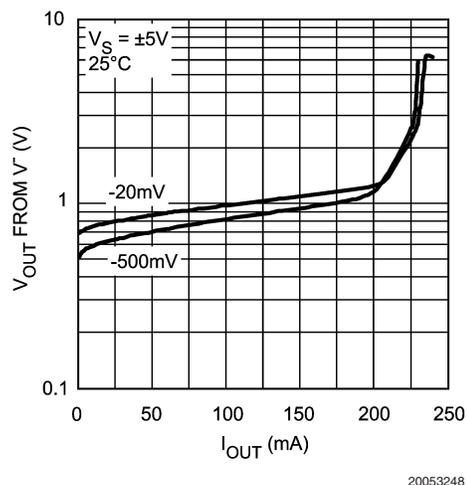


FIGURE 5.  $V_{OUT}$  vs.  $I_{SINK}$  (for Various Overdrive)

The LMH6657/6658 output stage is designed to swing within approximately one diode drop of each supply voltage by

utilizing specially designed high speed output clamps. This allows adequate output voltage swing even with 5V supplies and yet avoids some of the issues associated with rail-to-rail output operational amplifiers. Some of these issues are:

- Supply current increases when output reaches saturation at or near the supply rails
- Prolonged recovery when output approaches the rails

The LMH6657/6658 output is exceedingly well-behaved when it comes to recovering from an overload condition. As can be seen from *Figure 6* below, the LMH6657/6658 will typically recover from an output overload condition in about 18ns, regardless of the duration of the overload.

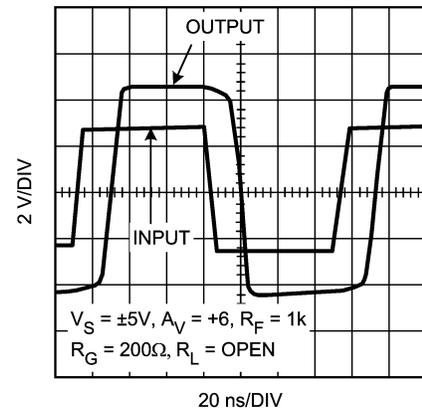


FIGURE 6. Output Overload Recovery

### OUTPUT PHASE REVERSAL

This is a problem with some operational amplifiers. This effect is caused by phase reversal in the input stage due to saturation of one or more of the transistors when the inputs exceed the normal expected range of voltages. Some applications, such as servo control loops among others, are sensitive to this kind of behavior and would need special safeguards to ensure proper functioning. The LMH6657/6658 is immune to output phase reversal with input overload. With inputs exceeded, the LMH6657/6658 output will stay at the clamped voltage from the supply rail. Exceeding the input supply voltages beyond the Absolute Maximum Ratings of the device could however damage or otherwise adversely effect the reliability or life of the device.

### DRIVING CAPACITIVE LOADS

The LMH6657/6658 can drive moderate values of capacitance by utilizing a series isolation resistor between the output and the capacitive load. Typical Performance Characteristics section shows the settling time behavior for various capacitive loads and  $20\Omega$  of isolation resistance. Capacitive load tolerance will improve with higher closed loop gain values. Applications such as ADC buffers, among others, present complex and varying capacitive loads to the Op Amp; best value for this isolation resistance is often found by experimentation and actual trial and error for each application.

### DISTORTION

Applications with demanding distortion performance requirements are best served with the device operating in the inverting mode. The reason for this is that in the inverting configuration, the input common mode voltage does not vary

## Output Characteristics (Continued)

with the signal and there is no subsequent ill effects due to this shift in operating point and the possibility of additional non-linearity. Moreover, under low closed loop gain settings (most suited to low distortion), the non-inverting configuration is at a further disadvantage of having to contend with the input common voltage range. There is also a strong relationship between output loading and distortion performance (i.e.  $1k\Omega$  vs.  $100\Omega$  distortion improves by about 20dB @100KHz) especially at the lower frequency end where the distortion tends to be lower. At higher frequency, this dependence diminishes greatly such that this difference is only about 4dB at 10MHz. But, in general, lighter output load leads to reduced HD3 term and thus improves THD.

### PRINTED CIRCUIT BOARD LAYOUT AND COMPONENT VALUES SECTIONS


Generally, a good high frequency layout will keep power supply and ground traces away from the inverting input and output pins. Parasitic capacitances on these nodes to ground will cause frequency response peaking and possible circuit oscillations (see Application Note OA-15 for more information). National Semiconductor suggests the following

evaluation boards as a guide for high frequency layout and as an aid in device testing and characterization:

Device	Package	Evaluation Board PN
LMH6657MF	SOT23-5	CLC730068
LMH6657MG	SC-70	NA
LMH6658MA	8-Pin SOIC	CLC730036
LMH6658MM	8-Pin MSOP	CLC730123


These free evaluation boards are shipped when a device sample request is placed with National Semiconductor. Another important parameter in working with high speed/high performance amplifiers, is the component values selection. Choosing external resistors that are large in value will effect the closed loop behavior of the stage because of the interaction of these resistors with parasitic capacitances. These capacitors could be inherent to the device or a by-product of the board layout and component placement. Either way, keeping the resistor values lower, will diminish this interaction to a large extent. On the other hand, choosing very low value resistors will load down nodes and will contribute to higher overall power dissipation.

**Physical Dimensions** inches (millimeters) unless otherwise noted

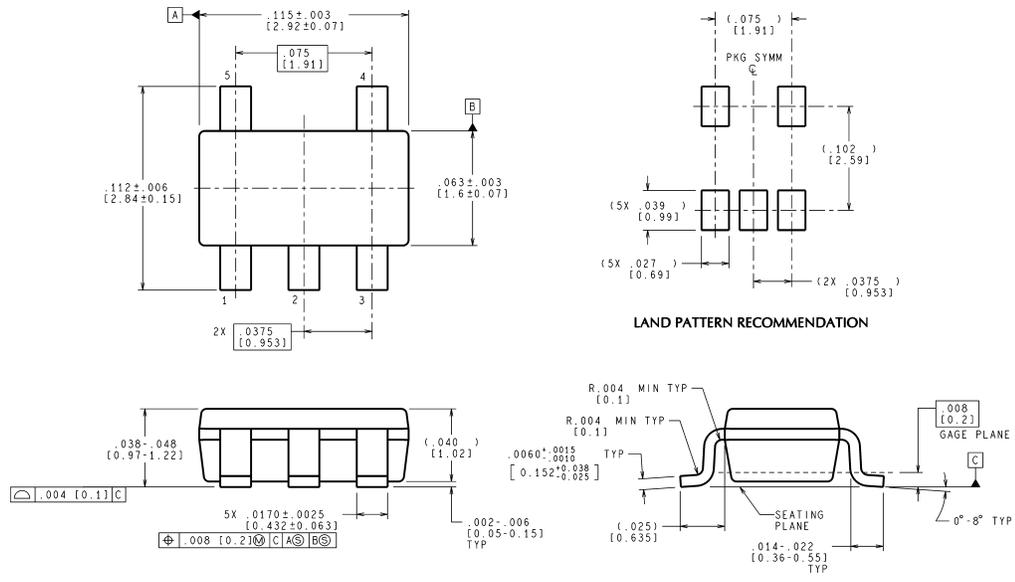

MF05A (Rev B)




**5-Pin SOT23  
NS Package Number MF05A**

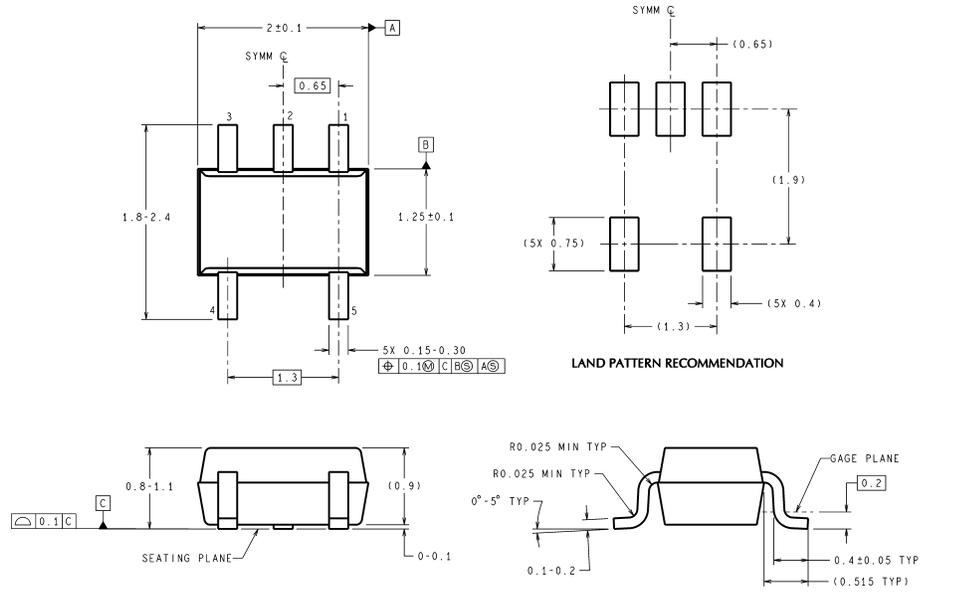



MAA05A (Rev C)

**SC70-5  
NS Package Number MAA05A**


**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

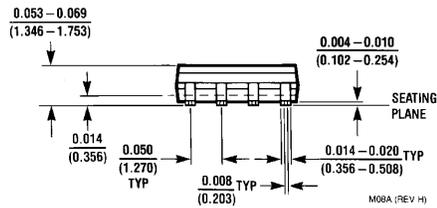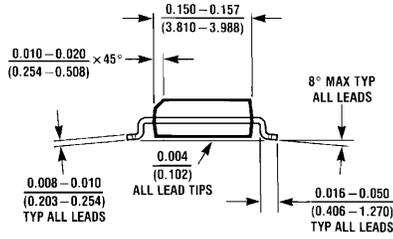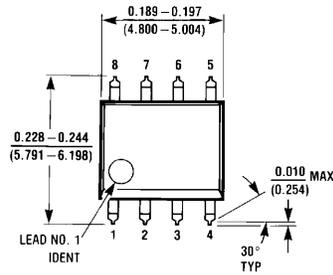

**8-Pin SOIC**  
NS Package Number M08A

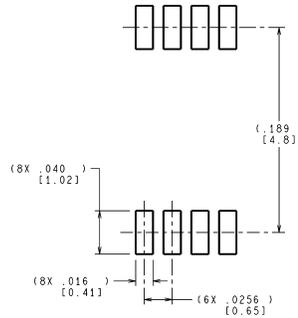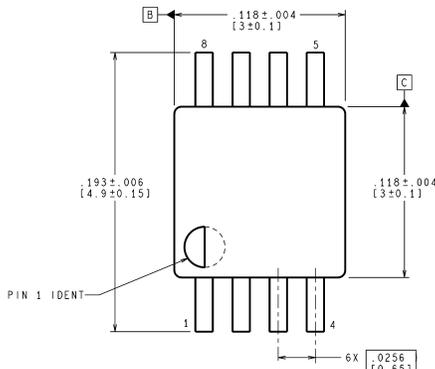

**LAND PATTERN RECOMMENDATION**

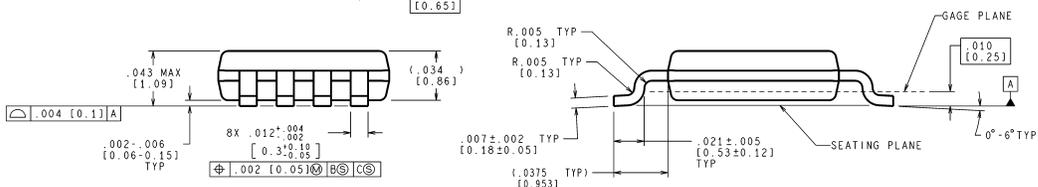

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

MUA08A (Rev E)

**8-Pin MSOP**  
NS Package Number MUA08A

## Notes

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at [www.national.com](http://www.national.com).

### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### BANNED SUBSTANCE COMPLIANCE

National Semiconductor certifies that the products and packing materials meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.



**National Semiconductor**  
**Americas Customer**  
**Support Center**  
Email: [new.feedback@nsc.com](mailto:new.feedback@nsc.com)  
Tel: 1-800-272-9959

[www.national.com](http://www.national.com)

**National Semiconductor**  
**Europe Customer Support Center**  
Fax: +49 (0) 180-530 85 86  
Email: [europa.support@nsc.com](mailto:europa.support@nsc.com)  
Deutsch Tel: +49 (0) 69 9508 6208  
English Tel: +44 (0) 870 24 0 2171  
Français Tel: +33 (0) 1 41 91 8790

**National Semiconductor**  
**Asia Pacific Customer**  
**Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor**  
**Japan Customer Support Center**  
Fax: 81-3-5639-7507  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)  
Tel: 81-3-5639-7560

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Transportation and Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated