

Standard Sensors for Detecting Ferrous Metals under Standard Conditions

- Wide array of variations. Ideal for a variety of applications.
- Lineup includes models with pre-wired connectors that use highly oil-resistant cables
- Lineup includes models with 3-mm diameter and sensing distance of 0.6 mm
- Cable protector provided as a standard feature.
- Sensing surface made from material that resists cutting oil for superior environment resistance.



Be sure to read *Safety Precautions* on page 22.


Cylindrical Proximity Sensor Selection Guide



Resists the influence of surrounding metal

Long sensing distance

Shielding	Diameter	Power supply	Sensing distance (mm)															
			0.6	0.8	1.0	1.5	2	3	4	5	7	8	10	14	18	20		
Shielded	3 dia.	DC 3-wire	○															
	4 dia.	DC 3-wire		○														
	M5	DC 3-wire			○													
	5.4 dia.	DC 3-wire			○													
	M8	DC 3-wire				○												
		AC 2-wire					○											
	M12	DC 3-wire					○											
		AC 2-wire						○										
	M18	DC 3-wire									○							
		AC 2-wire										○						
M30	DC 3-wire														○			
	AC 2-wire															○		
Unshielded	M8	DC 3-wire						○										
		AC 2-wire							○									
	M12	DC 3-wire									○							
		AC 2-wire										○						
	M18	DC 3-wire											○					
		AC 2-wire												○				
	M30	DC 3-wire															○	
		AC 2-wire																○

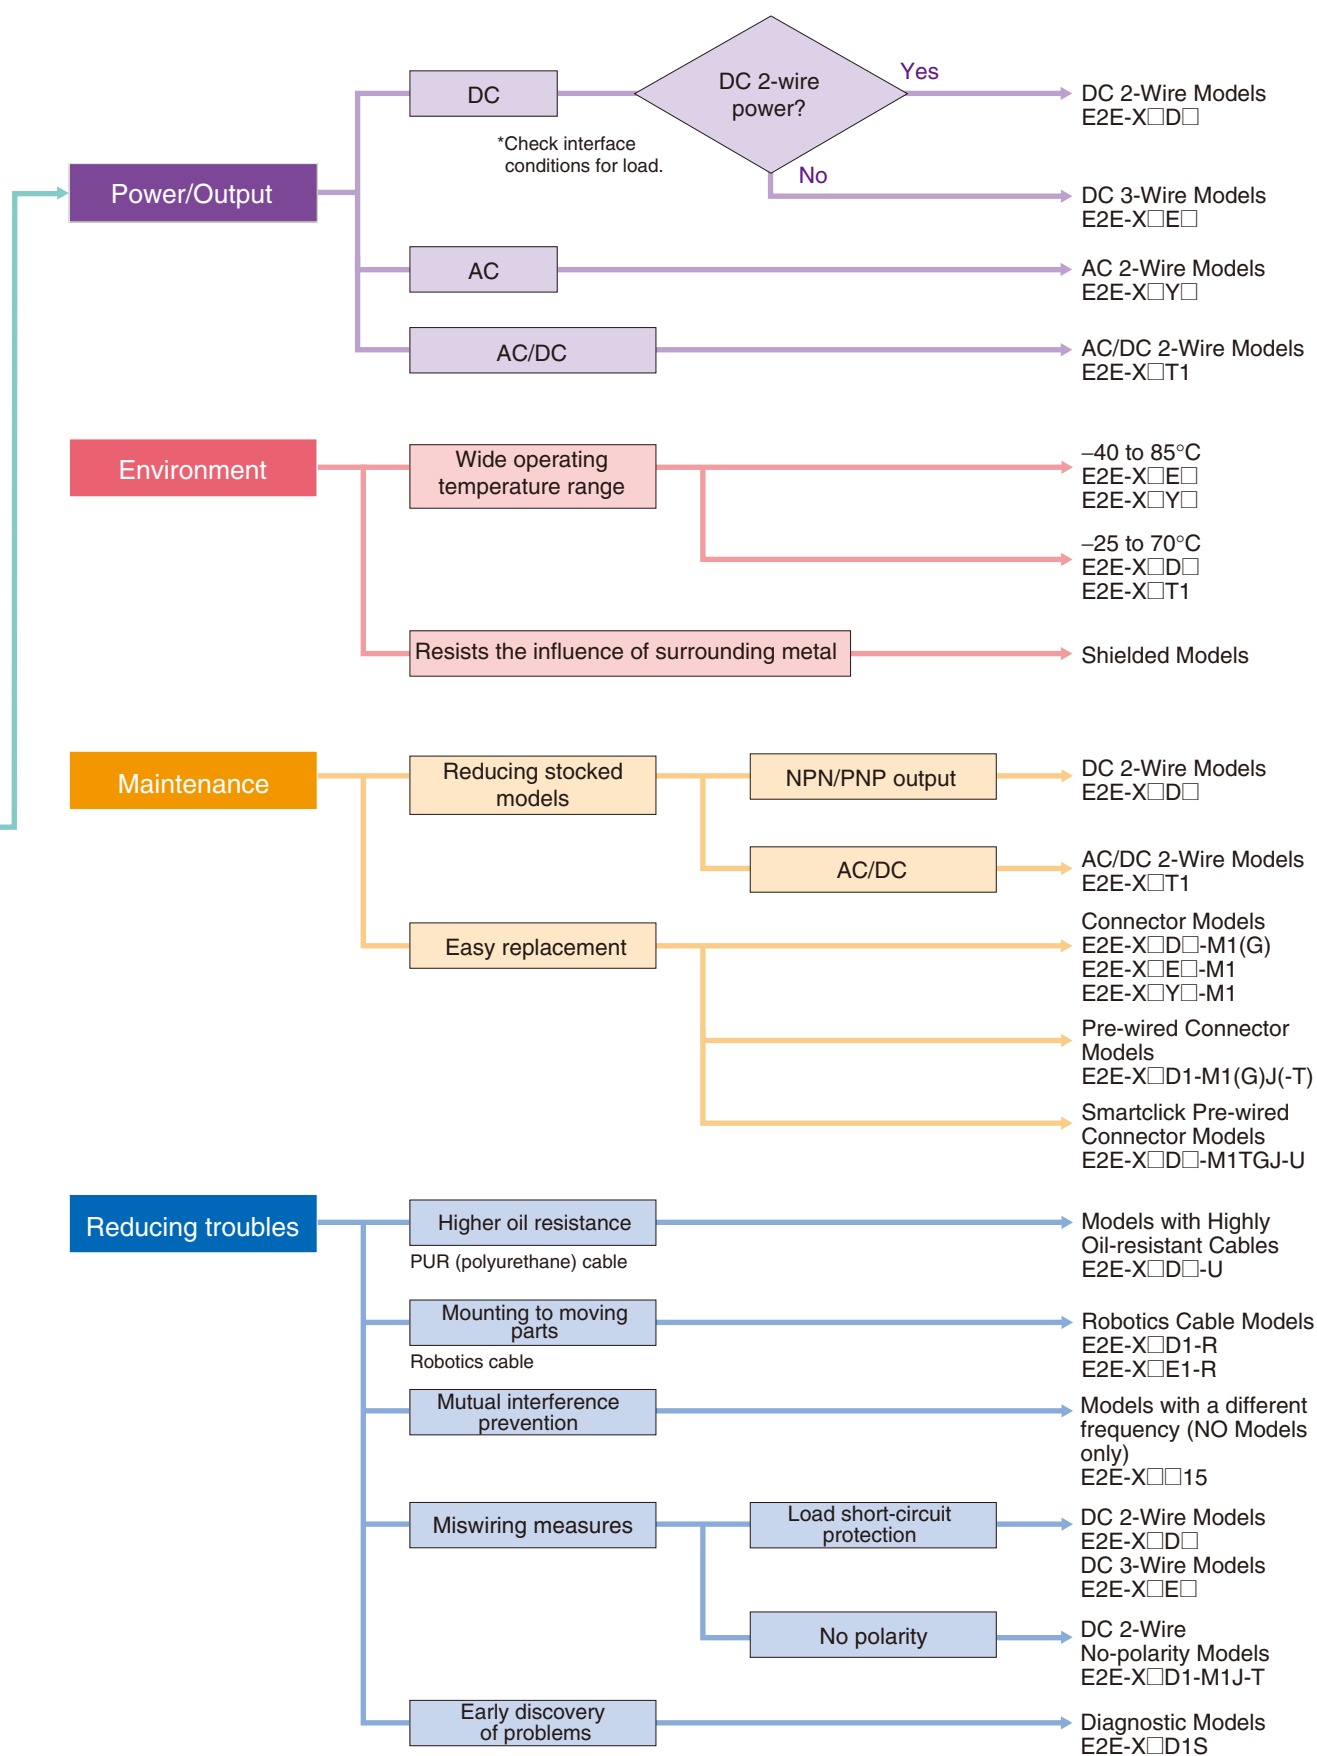

Note: Ask your OMRON sales representative for detail on Long Body Models, Transmission Couplers, and Power Couplers.


Features

Additions to the Series


Proximity Sensors with Highly Oil-resistant Cables added to the lineup with the E2E-□-U



Oil Resistance (Insulation service life):
twice or three times
that of oil-resistant vinyl chloride




Cable Flexibility:
approximately twice
that of vinyl chloride cables



More Flexibility at -40°C


Models with Smartclick pre-wired connectors added to the E2E-□-U Series

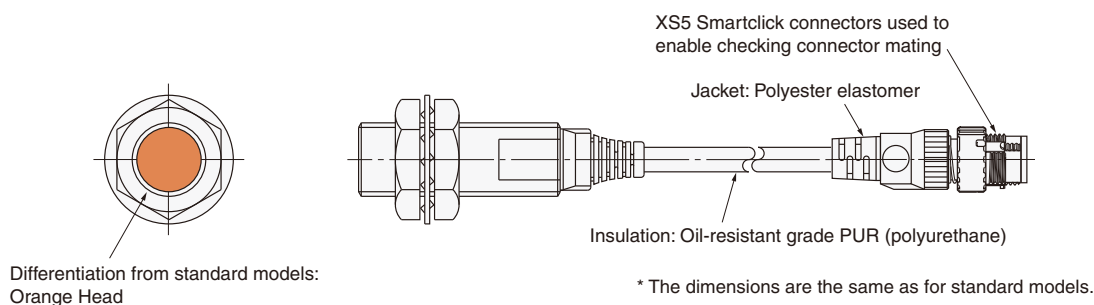


Ordering Information

Sensors



















Higher Oil Resistance, DC 2-Wire, Pre-wired Models

Appearance	Sensing distance	Model	
		NO	NC
Shielded 	M8	2 mm	E2E-X2D1-U E2E-X2D2-U
	M12	3 mm	E2E-X3D1-U E2E-X3D2-U
	M18	7 mm	E2E-X7D1-U E2E-X7D2-U
	M30	10 mm	E2E-X10D1-U E2E-X10D2-U

Higher Oil Resistance, DC 2-Wire, M12 Smartclick Pre-wired Models

Appearance	Sensing distance	Model	
		NO	NC
Shielded 	M8	2 mm	E2E-X2D1-M1TGJ-U E2E-X2D2-M1TGJ-U
	M12	3 mm	E2E-X3D1-M1TGJ-U E2E-X3D2-M1TGJ-U
	M18	7 mm	E2E-X7D1-M1TGJ-U E2E-X7D2-M1TGJ-U
	M30	10 mm	E2E-X10D1-M1TGJ-U E2E-X10D2-M1TGJ-U

DC 2-Wire, Pre-wired Models (Models with self-diagnostic function are 3-wire.)






















Self-diagnostic output	Appearance		Sensing distance		Model	
					NO	NC
Yes	Shielded 	M12	 3 mm		E2E-X3D1S *1	---
		M18	 7 mm		E2E-X7D1S *1	---
		M30	 10 mm		E2E-X10D1S *1	---
	Unshielded 	M12	 8 mm		E2E-X8MD1S *1	---
		M18	 14 mm		E2E-X14MD1S *1	---
		M30	 20 mm		E2E-X20MD1S *1	---
None	Shielded 	M8	 2 mm		E2E-X2D1-N *2*3	E2E-X2D2-N *3
		M12	 3 mm		E2E-X3D1-N *1*2*3	E2E-X3D2-N *3
		M18	 7 mm		E2E-X7D1-N *1*2*3	E2E-X7D2-N *3
		M30	 10 mm		E2E-X10D1-N *1*2*3	E2E-X10D2-N
	Unshielded 	M8	 4 mm		E2E-X4MD1 *2*3	E2E-X4MD2
		M12	 8 mm		E2E-X8MD1 *1*2*3	E2E-X8MD2
		M18	 14 mm		E2E-X14MD1 *1*2*3	E2E-X14MD2
		M30	 20 mm		E2E-X20MD1 *1*2*3	E2E-X20MD2

*1. Models with different frequencies are also available. The model numbers are E2E-X□D15 (example: E2E-X3D15-N).

*2. Models with robotics cables are also available. Add "-R" to the end of the model number (example: E2E-X4MD1-R).
The model number E2E-X2D1-N, however, becomes E2E-X2D1-R.

*3. Models are also available with 5-m cables. Add the cable length to the model number (example: E2E-X3D1-N 5M).



DC 2-Wire, Connector Models (Models with self-diagnostic function are 3-wire.)

Con- nector	Self-diag- nostic output	Appearance		Sensing distance		Model			
						NO	Applicable connector code *2	NC	Applicable connector code *2
M12	Yes	Shielded 	M12	 3 mm		E2E-X3D1S-M1	D	---	---
			M18	 7 mm		E2E-X7D1S-M1	D	---	---
			M30	 10 mm		E2E-X10D1S-M1	D	---	---
		Unshielded 	M12	 8 mm		E2E-X8MD1S-M1	D	---	---
			M18	 14 mm		E2E-X14MD1S-M1	D	---	---
			M30	 20 mm		E2E-X20MD1S-M1	D	---	---
	None	Shielded 	M8	 2 mm		E2E-X2D1-M1G	A	E2E-X2D2-M1G	D
			M12	 3 mm		E2E-X3D1-M1G *1	A	E2E-X3D2-M1G	D
			M18	 7 mm		E2E-X7D1-M1G *1	A	E2E-X7D2-M1G	D
			M30	 10 mm		E2E-X10D1-M1G *1	A	E2E-X10D2-M1G	D
		Unshielded 	M8	 4 mm		E2E-X4MD1-M1G	A	E2E-X4MD2-M1G	D
			M12	 8 mm		E2E-X8MD1-M1G *1	A	E2E-X8MD2-M1G	D
			M18	 14 mm		E2E-X14MD1-M1G *1	A	E2E-X14MD2-M1G	D
			M30	 20 mm		E2E-X20MD1-M1G *1	A	E2E-X20MD2-M1G	D
M8	Shielded 	M8	 2 mm		E2E-X2D1-M3G	G	E2E-X2D2-M3G	G	
			 4 mm		E2E-X4MD1-M3G	G	E2E-X4MD2-M3G	G	

*1. Models with different frequencies are also available. The model numbers are E2E-X□D15-M1G (example: E2E-X3D15-M1G).

*2. Refer to page 19 for details.

DC 2-Wire, Pre-wired Connector Models

Appearance	Sensing distance	Operate Mode	Model			
			Polarity: Yes	Applicable connector code *	Polarity: None	Applicable connector code *
Shielded 	M12	3 mm	E2E-X3D1-M1GJ	A	E2E-X3D1-M1J-T	B
	M18	7 mm	E2E-X7D1-M1GJ	A	E2E-X7D1-M1J-T	B
	M30	10 mm	E2E-X10D1-M1GJ	A	E2E-X10D1-M1J-T	B
Unshielded 	M12	8 mm	E2E-X8MD1-M1GJ	A	---	---
	M18	14 mm	E2E-X14MD1-M1GJ	A	---	---
	M30	20 mm	E2E-X20MD1-M1GJ	A	---	---

Note: 1. A model with no polarity has a residual voltage of 5 V, which must be taken into consideration together with the interface conditions (the PLC's ON voltage, for example) when connecting the Proximity Sensor to a load. Refer to page 19 for details.


2. The standard cable length is 300 mm. Models are also available with 500 mm and 1 m cables.

* Refer to page 19 for details.



Connector Pin Assignments of DC 2-Wire Models

- The connector pin assignments of each New E2E DC 2-Wire Model conform to IEC 947-5-2 Table III. (Only DC 2-Wire Models have been changed in comparison to the previous models.)
- The following models with conventional connector pin assignments are available as well. (Only NO Models can be used.)
The cable at the right should also be used if the XW3A-P□45-G11 Connector Junction Box is already being used.

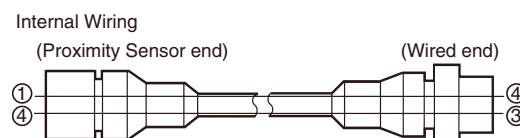Cable length	Model
500 mm	XS2W-D421-BY1





Models with conventional connector pin assignments are available as well.

Appearance		Model			
		NO	Applicable connector code *	NC	Applicable connector code *
Shielded 	M8	E2E-X2D1-M1	C	E2E-X2D2-M1	D
	M12	E2E-X3D1-M1	C	E2E-X3D2-M1	D
	M18	E2E-X7D1-M1	C	E2E-X7D2-M1	D
	M30	E2E-X10D1-M1	C	E2E-X10D2-M1	D
Unshielded 	M8	E2E-X4MD1-M1	C	E2E-X4MD2-M1	D
	M12	E2E-X8MD1-M1	C	E2E-X8MD2-M1	D
	M18	E2E-X14MD1-M1	C	E2E-X14MD2-M1	D
	M30	E2E-X20MD1-M1	C	E2E-X20MD2-M1	D





Note: Refer to page 19 for details.

DC 3-Wire, Pre-Wired Models

Appearance	Sensing distance		Model	
			Output configuration: NPN NO	Output configuration: PNP NO
Shielded 	3 dia.	0.6 mm	E2E-CR6C1	E2E-CR6B1
	4 dia.	0.8 mm	E2E-CR8C1 *1*2	E2E-CR8B1 *2
	M5	1 mm	E2E-X1C1 *1*2	E2E-X1B1 *2
	5.4 dia.	1 mm	E2E-C1C1 *1*2	E2E-C1B1
	M8	1.5 mm	E2E-X1R5E1 *1*2	E2E-X1R5F1 *1*2
	M12	2 mm	E2E-X2E1 *1*2*3*4	E2E-X2F1 *1*2*3
	M18	5 mm	E2E-X5E1 *1*2*3*4	E2E-X5F1 *1*2*3
Unshielded 	M30	10 mm	E2E-X10E1 *1*2*3*4	E2E-X10F1 *2
	M8	2 mm	E2E-X2ME1 *2	E2E-X2MF1 *2
	M12	5 mm	E2E-X5ME1 *1*2*3*4	E2E-X5MF1 *2
	M18	10 mm	E2E-X10ME1 *1*2*3*4	E2E-X10MF1 *2
	M30	18 mm	E2E-X18ME1 *1*2*3*4	E2E-X18MF1 *2



Note: Models with NPN NC output configurations are also available for all of the above models.
 *1. Models are also available with 5-m cables. Add the cable length to the model number (example: E2E-X2E1 5M).
 *2. Models with robotics cables are also available. The model numbers are E2E-X □E1-R (example: E2E-X5E1-R).
 *3. Models with different frequencies are also available. The model numbers are E2E-X □E□5 (example: E2E-X5E15).
 *4. These models are also available with e-CON connectors (0.3-m cable). Add "-ECON" to the end of the model number (example: E2E-X2E1-ECON).

DC 3-Wire, Connector Models

Connector	Appearance	Sensing distance		Model		Applicable connector code *
				Output configuration: NPN NO	Output configuration: PNP NO	
M12	Shielded 	M8	1.5 mm	E2E-X1R5E1-M1	E2E-X1R5F1-M1	B
		M12	2 mm	E2E-X2E1-M1	E2E-X2F1-M1	B
		M18	5 mm	E2E-X5E1-M1	E2E-X5F1-M1	B
		M30	10 mm	E2E-X10E1-M1	E2E-X10F1-M1	B
	Unshielded 	M8	2 mm	E2E-X2ME1-M1	E2E-X2MF1-M1	B
		M12	5 mm	E2E-X5ME1-M1	E2E-X5MF1-M1	B
		M18	10 mm	E2E-X10ME1-M1	E2E-X10MF1-M1	B
		M30	18 mm	E2E-X18ME1-M1	E2E-X18MF1-M1	B
M8	Shielded 	M8	1.5 mm	E2E-X1R5E1-M3	E2E-X1R5F1-M3	G
	Unshielded 	M8	2 mm	E2E-X2ME1-M3	E2E-X2MF1-M3	G

Note: Models with NPN NC output configurations are also available for all of the above models.
 * Refer to page 19 for details.



AC 2-Wire, Pre-wired Models

Appearance		Sensing distance		Model	
				NO	NC
Shielded 	M8	1.5 mm		E2E-X1R5Y1	E2E-X1R5Y2
	M12	2 mm		E2E-X2Y1 *1*2	E2E-X2Y2
	M18	5 mm		E2E-X5Y1 *1*2	E2E-X5Y2
	M30	10 mm		E2E-X10Y1 *1*2	E2E-X10Y2
Unshielded 	M8	2 mm		E2E-X2MY1	E2E-X2MY2
	M12	5 mm		E2E-X5MY1 *1*2	E2E-X5MY2
	M18	10 mm		E2E-X10MY1 *1	E2E-X10MY2
	M30	18 mm		E2E-X18MY1 *1	E2E-X18MY2

*1. Models with different frequencies are also available. The model numbers are E2E-X□Y□5 (example: E2E-X5Y15).


*2. Models are also available with 5-m cables. Add the cable length to the model number (example: E2E-X2Y1 5M).

AC 2-wire, Connector Models

Connector	Appearance		Sensing distance		Model			
					NO	Applicable connector code *	NC	Applicable connector code *
M12	Shielded 	M12	2 mm		E2E-X2Y1-M1	E	E2E-X2Y2-M1	F
		M18	5 mm		E2E-X5Y1-M1	E	E2E-X5Y2-M1	F
		M30	10 mm		E2E-X10Y1-M1	E	E2E-X10Y2-M1	F
	Unshielded 	M12	5 mm		E2E-X5MY1-M1	E	E2E-X5MY2-M1	F
		M18	10 mm		E2E-X10MY1-M1	E	E2E-X10MY2-M1	F
		M30	18 mm		E2E-X18MY1-M1	E	E2E-X18MY2-M1	F

* Refer to page 19 for details.

AC/DC 2-Wire, Pre-wired Models

Appearance		Sensing distance		Operation mode	Model
Shielded 	M12	3 mm		NO	E2E-X3T1
	M18	7 mm			E2E-X7T1 *
	M30	10 mm			E2E-X10T1

Note: These models do not conform to CE standards.

* Models are also available with 5-m cables. Add the cable length to the model number (example: E2E-X7T1 5M).

Accessories (Order Separately)

Sensor I/O Connectors

Refer to *Introduction to Sensor I/O Connectors* for details.

Mounting Brackets Protective Covers Sputter Protective Covers Refer to Y92□ for details.

Ratings and Specifications

E2E-X□D□ DC 2-Wire Models

Item	Size		M8		M12		M18		M30								
	Shielded	Model	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded							
	E2E-X2D□	E2E-X4MD□	E2E-X3D□	E2E-X8MD□	E2E-X7D□	E2E-X14MD□	E2E-X10D□	E2E-X20MD□									
Sensing distance	2 mm ±10%		4 mm ±10%		3 mm ±10%		8 mm ±10%		7 mm ±10%		14 mm ±10%		10 mm ±10%		20 mm ±10%		
Set distance *1	0 to 1.6 mm		0 to 3.2 mm		0 to 2.4 mm		0 to 6.4 mm		0 to 5.6 mm		0 to 11.2 mm		0 to 8 mm		0 to 16 mm		
Differential travel	15% max. of sensing distance				10% max. of sensing distance												
Detectable object	Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on pages 13 and 14.)																
Standard sensing object	Iron, 8 × 8 × 1 mm		Iron, 20 × 20 × 1 mm		Iron, 12 × 12 × 1 mm		Iron, 30 × 30 × 1 mm		Iron, 18 × 18 × 1 mm		Iron, 30 × 30 × 1 mm		Iron, 54 × 54 × 1 mm				
Response frequency *2	1.5 kHz		1 kHz		0.8 kHz		0.5 kHz		0.4 kHz				0.1 kHz				
Power supply voltage (operating voltage range)	12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.																
Leakage current	0.8 mA max.																
Control output	Load current	3 to 100 mA, Diagnostic output: 50 mA for -D1(5)S Models															
	Residual voltage *3	3 V max. (Load current: 100 mA, Cable length: 2 m, M1J-T Models only: 5 V max.)															
Indicators	D1 Models: Operation indicator (red) and setting indicator (green) D2 Models: Operation indicator (red)																
Operation mode (with sensing object approaching)	D1 Models: NO D2 Models: NC Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 16 for details.																
Diagnostic output delay	0.3 to 1 s																
Protection circuits	Surge suppressor, Load short-circuit protection (for control and diagnostic output)																
Ambient temperature range	Operating: -25 to 70°C, Storage: -40 to 85°C (with no icing or condensation)																
Ambient humidity range	Operating/storage: 35% to 95% (with no condensation)																
Temperature influence	±15% max. of sensing distance at 23°C in the temperature range of -25 to 70°C				±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C												
Voltage influence	±1% max. of sensing distance at rated voltage in the rated voltage ±15% range																
Insulation resistance	50 MΩ min. (at 500 VDC) between current-carrying parts and case																
Dielectric strength	1000 VAC, 50/60 Hz for 1 minute between current carry parts and case																
Vibration resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions																
Shock resistance	Destruction: 500 m/s ² 10 times each in X, Y, and Z directions				Destruction: 1,000 m/s ² 10 times each in X, Y, and Z directions												
Degree of protection	Pre-wired Models : IEC 60529 IP67, in-house standards: oil-resistant Connector Models : IEC 60529 IP67																
Connection method	Pre-wired Models (Standard cable length: 2 m), Connector Models, or Pre-wired Connector Models (Standard cable length: 0.3 m)																
Weight (packed state)	Pre-wired Models	Approx. 60 g				Approx. 70 g				Approx. 130 g				Approx. 175 g			
	Pre-wired Connector Models	---				Approx. 40 g				Approx. 70 g				Approx. 110 g			
	Connector Models	Approx. 15 g				Approx. 25 g				Approx. 40 g				Approx. 90 g			
Materials	Case	Stainless steel (SUS303)				Nickel-plated brass											
	Sensing surface	PBT															
	Clamping nuts	Nickel-plated brass															
	Toothed washer	Zinc-plated iron															
Accessories	Instruction manual																

*1. Use the E2E within the range in which the setting indicator (green LED) is ON (except D2 Models).

*2. The response frequency is an average value.

Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

*3. The residual voltage of each M1J-T Model is 5 V. When connecting to a device, make sure that the device can withstand the residual voltage. (Refer to page 23 for details.)

E2E-X□E□/F□ DC 3-Wire Models

Item	Size Shielded Model	M8		M12		M18		M30	
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
		E2E-X1R5E□/F□	E2E-X2ME□/F□	E2E-X2E□/F□	E2E-X5ME□/F□	E2E-X5E□/F□	E2E-X10ME□/F□	E2E-X10E□/F□	E2E-X18ME□/F□
Sensing distance		1.5 mm ±10%	2 mm ±10%	5 mm ±10%		10 mm ±10%		18 mm ±10%	
Set distance		0 to 1.2 mm	0 to 1.6 mm	0 to 4 mm		0 to 8 mm		0 to 14 mm	
Differential travel		10% max. of sensing distance							
Detectable object		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on pages 13 and 14.)							
Standard sensing object		Iron, 8 × 8 × 1 mm	Iron, 12 × 12 × 1 mm		Iron, 15 × 15 × 1 mm	Iron, 18 × 18 × 1 mm	Iron, 30 × 30 × 1 mm		Iron, 54 × 54 × 1 mm
Response frequency *1		2 kHz	0.8 kHz	1.5 kHz	0.4 kHz	0.6 kHz	0.2 kHz	0.4 kHz	0.1 kHz
Power supply voltage (operating voltage range) *2		12 to 24 VDC (10 to 40 VDC), ripple (p-p): 10% max.							
Current consumption		13 mA max.							
Control output	Load current *2	200 mA max.							
	Residual voltage	2 V max. (Load current: 200 mA, Cable length: 2 m)							
Indicators		Operation indicator (red)							
Operation mode (with sensing object approaching)		E1 Models: NO E2 Models: Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 16 for details. F1 Models: NO							
Protection circuits		Load short-circuit protection, Surge suppressor, Reverse polarity protection							
Ambient temperature range *2		Operating/Storage: -40 to 85°C (with no icing or condensation)							
Ambient humidity range		Operating/Storage: 35% to 95%							
Temperature influence		±15% max. of sensing distance at 23°C in the temperature range of -40 to 85°C ±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C							
Voltage influence		±1% max. of sensing distance at rated voltage in the rated voltage ±15% range							
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case							
Dielectric strength		1,000 VAC, 50/60 Hz for 1 minute between current carry parts and case							
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions							
Shock resistance		Destruction: 500 m/s ² 10 times each in X, Y, and Z directions			Destruction: 1,000 m/s ² 10 times each in X, Y, and Z directions				
Degree of protection		Pre-wired Models : IEC 60529 IP67, in-house standards: oil-resistant Connector Models : IEC 60529 IP67							
Connection method		Pre-wired Models (Standard cable length: 2 m) and Connector Models							
Weight	Pre-wired Models	Approx. 65 g		Approx. 75 g		Approx. 150 g		Approx. 195 g	
	Connector Models	Approx. 15 g		Approx. 25 g		Approx. 40 g		Approx. 90 g	
Materials	Case	Stainless steel (SUS303)		Nickel-plated brass					
	Sensing surface	PBT							
	Clamping nuts	Nickel-plated brass							
	Toothed washer	Zinc-plated iron							
Accessories		Instruction manual							

*1. The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

*2. When using an M8 Model at an ambient temperature between 70 and 85°C, supply 10 to 30 VDC to the Sensor and make sure that the Sensor has a control output of 100 mA maximum.

E2E-C□C/B□ and E2E-X1C/B□ DC 3-Wire Models

Item	Size	3 dia.	4 dia.	M5	5.4 dia.
	Shielded Model	Shielded			
		E2E-CR6C/B□	E2E-CR8C/B□	E2E-X1C/B□	E2E-C1C/B□
Sensing distance		0.6 mm ±15%	0.8 mm ±15%	1 mm ±15%	
Set distance		0 to 0.4 mm	0 to 0.5 mm	0 to 0.7 mm	
Differential travel		15% max. of sensing distance			
Detectable object		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 14.)			
Standard sensing object		Iron, 3 × 3 × 1 mm	Iron, 5 × 5 × 1 mm		
Response frequency *		2 kHz	3 kHz		
Power supply voltage (operating voltage range)		12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.			
Current consumption		10 mA max.	17 mA max.		
Control output	Load current	Open-collector output, 80 mA max. (30 VDC max.)	Open-collector output, 100 mA max. (30 VDC max.)		
	Residual voltage	1 V max. (Load current: 80 mA, Cable length: 2 m)	2 V max. (Load current: 100 mA, Cable length: 2 m)		
Indicators		Operation indicator (red)			
Operation mode (with sensing object approaching)		C1/B1 Models: NO Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 17 for details. C2 Models: NC			
Protection circuits		Reverse polarity protection, Surge suppressor			
Ambient temperature range		Operating/Storage: -25 to 70°C (with no icing or condensation)			
Ambient humidity range		Operating/Storage: 35% to 95%			
Temperature influence		±15% max. of sensing distance at 23°C in the temperature range of -25 to 70°C			
Voltage influence		±5% max. of sensing distance at rated voltage in the rated voltage ±10% range	±2.5% max. of sensing distance at rated voltage in the rated voltage ±15% range		
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case			
Dielectric strength		500 VAC, 50/60 Hz for 1 min between current-carrying parts and case			
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			
Shock resistance		Destruction: 500 m/s ² 10 times each in X, Y, and Z directions			
Degree of protection		IEC 60529 IP66	IEC 60529 IP67, in-house standards: oil-resistant		
Connection method		Pre-wired Models (Standard cable length: 2 m)			
Weight (packed state)		Approx. 60 g			
Materials	Case	Stainless steel (SUS303)		Nickel-plated brass	
	Sensing surface	Heat-resistant ABS			
	Clamping nuts	Nickel-plated brass (E2E-X1C/B□ only)			
	Toothed washer	Zinc-plated iron (E2E-X1C/B□ only)			
Accessories		Instruction manual			

* The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

E2E-X□Y□ AC 2-Wire Models

Item	Size Shielded Model	M8		M12		M18		M30	
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
		E2E-X1R5Y□	E2E-X2MY□	E2E-X2Y□	E2E-X5MY□	E2E-X5Y□	E2E-X10MY□	E2E-X10Y□	E2E-X18MY□
Sensing distance		1.5 mm ±10%	2 mm ±10%		5 mm ±10%		10 mm ±10%		18 mm ±10%
Set distance		0 to 1.2 mm	0 to 1.6 mm		0 to 4 mm		0 to 8 mm		0 to 14 mm
Differential travel		10% max. of sensing distance							
Detectable object		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 14.)							
Standard sensing object		Iron, 8 × 8 × 1 mm	Iron, 12 × 12 × 1 mm		Iron, 15 × 15 × 1 mm	Iron, 18 × 18 × 1 mm	Iron, 30 × 30 × 1 mm		Iron, 54 × 54 × 1 mm
Response frequency		25 Hz							
Power supply voltage (operating voltage range) ¹		24 to 240 VAC (20 to 264 VAC), 50/60 Hz							
Leakage current		1.7 mA max.							
Control output	Load current ²	5 to 100 mA		5 to 200 mA		5 to 300 mA			
	Residual voltage	Refer to <i>Engineering Data</i> on page 15.							
Indicators		Operation indicator (red)							
Operation mode (with sensing object approaching)		Y1 Models: NO Y2 Models: NC Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 18 for details.							
Protection circuits		Surge suppressor							
Ambient temperature range ^{*1,2}		Operating/Storage: -25 to 70°C (with no icing or condensation)		Operating/Storage: -40 to 85°C (with no icing or condensation)					
Ambient humidity range		Operating/storage: 35% to 95% (with no condensation)							
Temperature influence		±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C		±15% max. of sensing distance at 23°C in the temperature range of -40 to 85°C, ±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C					
Voltage influence		±1% max. of sensing distance at rated voltage in the rated voltage ±15% range							
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case							
Dielectric strength		4,000 VAC (M8 Models: 2,000 VAC), 50/60 Hz for 1 min between current-carrying parts and case							
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions							
Shock resistance		Destruction: 500 m/s ² 10 times each in X, Y, and Z directions		Destruction: 1,000 m/s ² 10 times each in X, Y, and Z directions					
Degree of protection		Pre-wired Models : IEC 60529 IP67, in-house standards: oil-resistant Connector Models : IEC 60529 IP67							
Connection method		Pre-wired Models (Standard cable length: 2 m) and Connector Models							
Weight	Pre-wired Models Model	Approx. 60 g		Approx. 70 g		Approx. 130 g		Approx. 175 g	
	Connector Models	Approx. 15 g		Approx. 25 g		Approx. 40 g		Approx. 90 g	
Materials	Case	Stainless steel (SUS303)		Nickel-plated brass					
	Sensing surface	PBT							
	Clamping nuts	Nickel-plated brass							
	Toothed washer	Zinc-plated iron							
Accessories		Instruction manual							

*1. When supplying 24 VAC to any of the above models, make sure that the operating ambient temperature range is at least -25°C.

*2. When using an M18 or M30 Connector Model at an ambient temperature between 70 and 85°C, make sure that the Sensor has a control output (load current) of 5 to 200 mA max.

AC/DC 2-Wire Models

Item	Size Shielded Model	M12	M18	M30
		Shielded		
		E2E-X3T1	E2E-X7T1	E2E-X10T1
Sensing distance		3 mm ±10%	7 mm ±10%	10 mm ±10%
Set distance		0 to 2.4 mm	0 to 5.6 mm	0 to 8 mm
Differential travel		10% max. of sensing distance		
Detectable object		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 13.)		
Standard sensing object		Iron, 12 × 12 × 1 mm	Iron, 18 × 18 × 1 mm	Iron, 30 × 30 × 1 mm
Response frequency *1	DC	1 kHz	0.5 kHz	0.4 kHz
	AC	25 Hz		
Power supply voltage (operating voltage range) *2		24 to 240 VDC (20 to 264 VDC) 48 to 240 VAC (40 to 264 VAC)		
Leakage current		DC: 1 mA max. AC: 2 mA max.		
Control output	Load current	5 to 100 mA		
	Residual voltage	DC: 6 V max. (Load current: 100 mA, Cable length: 2 m) AC: 10 V max. (Load current: 5 mA, Cable length: 2 m)		
Indicators		Operation indicator (red), Setting indicator (green)		
Operation mode (with sensing object approaching)		NO (Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 16 for details.)		
Protection circuits		Load short-circuit protection (20 to 40 VDC only), Surge suppressor		
Ambient temperature range		Operating: -25 to 70°C, Storage: -40 to 85°C (with no icing or condensation)		
Ambient humidity range		Operating/Storage: 35% to 95%		
Temperature influence		±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C		
Voltage influence		±1% max. of sensing distance at rated voltage in the rated voltage ±15% range		
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case		
Dielectric strength		4,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case		
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions		
Shock resistance		Destruction: 1,000 m/s ² 10 times each in X, Y, and Z directions		
Degree of protection		IEC 60529 IP67, in-house standards: oil-resistant		
Connection method		Pre-wired Models (Standard cable length: 2 m)		
Weight (packed state)		Approx. 80 g	Approx. 140 g	Approx. 190 g
Materials	Case	Nickel-plated brass		
	Sensing surface	PBT		
	Clamping nuts	Nickel-plated brass		
	Toothed washer	Zinc-plated iron		
Accessories		Instruction manual		

*1. The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

*2. Power Supply Voltage Waveform:






Use a sine wave for the power supply. Using a rectangular AC power supply may result in faulty reset.

I/O Circuit Diagrams

E2E-X□D□ DC 2-Wire Models

Operation mode	Model	Timing Chart	Output circuit																
<p>Without self-diagnostic output: NO</p>	<p>E2E-X□D1-N E2E-X□D1-M1G(J) E2E-X□D1-(M1TGJ)-U E2E-X□D1-M3G</p>	<table border="1" style="margin-top: 10px;"> <tr> <td>Setting indicator (green)</td> <td>ON</td> </tr> <tr> <td>Setting indicator (green)</td> <td>OFF</td> </tr> <tr> <td>Operation indicator (red)</td> <td>ON</td> </tr> <tr> <td>Operation indicator (red)</td> <td>OFF</td> </tr> <tr> <td>Control output</td> <td>ON</td> </tr> <tr> <td>Control output</td> <td>OFF</td> </tr> </table>	Setting indicator (green)	ON	Setting indicator (green)	OFF	Operation indicator (red)	ON	Operation indicator (red)	OFF	Control output	ON	Control output	OFF	<p>Polarity: Yes</p> <p>Note: The load can be connected to either the +V or 0 V side.</p>				
	Setting indicator (green)	ON																	
Setting indicator (green)	OFF																		
Operation indicator (red)	ON																		
Operation indicator (red)	OFF																		
Control output	ON																		
Control output	OFF																		
<p>E2E-X□D1-M1J-T</p>	<table border="1" style="margin-top: 10px;"> <tr> <td>Setting indicator (green)</td> <td>ON</td> </tr> <tr> <td>Setting indicator (green)</td> <td>OFF</td> </tr> <tr> <td>Operation indicator (red)</td> <td>ON</td> </tr> <tr> <td>Operation indicator (red)</td> <td>OFF</td> </tr> <tr> <td>Control output</td> <td>ON</td> </tr> <tr> <td>Control output</td> <td>OFF</td> </tr> </table>	Setting indicator (green)	ON	Setting indicator (green)	OFF	Operation indicator (red)	ON	Operation indicator (red)	OFF	Control output	ON	Control output	OFF	<p>Polarity: None</p> <p>Note 1. The load can be connected to either the +V or 0 V side. 2. The E2E-X□D1-M1J-T has no polarity. Therefore, terminals 3 and 4 have no polarity.</p>					
Setting indicator (green)	ON																		
Setting indicator (green)	OFF																		
Operation indicator (red)	ON																		
Operation indicator (red)	OFF																		
Control output	ON																		
Control output	OFF																		
<p>Without self-diagnostic output: NC</p>	<p>E2E-X□D2-N E2E-X□D2-M1G E2E-X□D2-(M1TGJ)-U E2E-X□D2-M3G</p>	<table border="1" style="margin-top: 10px;"> <tr> <td>Operation indicator (red)</td> <td>ON</td> </tr> <tr> <td>Operation indicator (red)</td> <td>OFF</td> </tr> <tr> <td>Control output</td> <td>ON</td> </tr> <tr> <td>Control output</td> <td>OFF</td> </tr> </table>	Operation indicator (red)	ON	Operation indicator (red)	OFF	Control output	ON	Control output	OFF	<p>Note: The load can be connected to either the +V or 0 V side.</p>								
Operation indicator (red)	ON																		
Operation indicator (red)	OFF																		
Control output	ON																		
Control output	OFF																		
<p>With self-diagnostic output: NO</p>	<p>E2E-X□D1S E2E-X□D1S-M1</p>	<table border="1" style="margin-top: 10px;"> <tr> <td>Setting indicator (green)</td> <td>ON</td> </tr> <tr> <td>Setting indicator (green)</td> <td>OFF</td> </tr> <tr> <td>Operation indicator (red)</td> <td>ON</td> </tr> <tr> <td>Operation indicator (red)</td> <td>OFF</td> </tr> <tr> <td>Control output</td> <td>ON</td> </tr> <tr> <td>Control output</td> <td>OFF</td> </tr> <tr> <td>Diagnostic output</td> <td>ON</td> </tr> <tr> <td>Diagnostic output</td> <td>OFF</td> </tr> </table> <p>The diagnostic output is ON when there is a coil burnout or the sensing object is located in the unstable sensing area for 0.3 s or longer.</p>	Setting indicator (green)	ON	Setting indicator (green)	OFF	Operation indicator (red)	ON	Operation indicator (red)	OFF	Control output	ON	Control output	OFF	Diagnostic output	ON	Diagnostic output	OFF	<p>Note: Connect both the loads to the +V side of the control output and diagnostic output.</p>
Setting indicator (green)	ON																		
Setting indicator (green)	OFF																		
Operation indicator (red)	ON																		
Operation indicator (red)	OFF																		
Control output	ON																		
Control output	OFF																		
Diagnostic output	ON																		
Diagnostic output	OFF																		

Sensor I/O Connectors

Connector			Applicable connector code	Connector model number	Applicable Proximity Sensor model number	Connection diagram No. *1	
Screw	Appearance	Cable length					
M12	Straight 	2 m	A	XS2F-D421-DA0-A	E2E-X□D1-M1G E2E-X□D1-M1GJ	1	
			B	XS2F-D421-DC0-A	E2E-X□D1-M1J-T E2E-X□E/F1-M1	3 9	
			C	XS2F-D421-DD0	E2E-X□D1-M1	2	
			D	XS2F-D421-D80-A	E2E-X□D2-M1 E2E-X□D2-M1(G) E2E-X□D1S-M1	7 6 5	
			E	XS2F-A421-DB0-A	E2E-X□Y1-M1	11	
			F	XS2F-A421-D90-A	E2E-X□Y2-M1	12	
		5 m	A	XS2F-D421-GA0-A	E2E-X□D1-M1G E2E-X□D1-M1GJ	1	
			B	XS2F-D421-GC0-A	E2E-X□D1-M1J-T E2E-X□E/F1-M1	3 9	
			C	XS2F-D421-GD0	E2E-X□D1-M1	2	
			D	XS2F-D421-G80-A	E2E-X□D2-M1 E2E-X□D2-M1(G) E2E-X□D1S-M1	7 6 5	
			E	XS2F-A421-GB0-A	E2E-X□Y1-M1	11	
			F	XS2F-A421-G90-A	E2E-X□Y2-M1	12	
	L-shape 	2 m	A	XS2F-D422-DA0-A	E2E-X□D1-M1G E2E-X□D1-M1GJ	1	
			B	XS2F-D422-DC0-A	E2E-X□D1-M1J-T E2E-X□E/F1-M1	3 9	
			C	XS2F-D422-DD0	E2E-X□D1-M1	2	
			D	XS2F-D422-D80-A	E2E-X□D2-M1 E2E-X□D2-M1(G) E2E-X□D1S-M1	7 6 5	
			E	XS2F-A422-DB0-A	E2E-X□Y1-M1	11	
			5 m	A	XS2F-D422-GA0-A	E2E-X□D1-M1G E2E-X□D1-M1GJ	1
		B		XS2F-D422-GC0-A	E2E-X□D1-M1J-T E2E-X□E/F1-M1	3 9	
		C		XS2F-D422-GD0	E2E-X□D1-M1	2	
		D		XS2F-D422-G80-A	E2E-X□D2-M1 E2E-X□D2-M1(G) E2E-X□D1S-M1	7 6 5	
		E		XS2F-A422-GB0-A	E2E-X□Y1-M1	11	
		Smartclick Connector, Straight 		2 m	H	XS5F-D421-D80-P	E2E-X□D□-M1TGJ-U
			5 m	XS5F-D421-G80-P			
M8 *2	Straight 	2 m	G	XS3F-M421-402-R	E2E-X□D1-M3G	4	
					E2E-X□D2-M3G	8	
					E2E-X□E/F1-M3	10	
		5 m			XS3F-M421-405-R	E2E-X□D1-M3G	4
						E2E-X□D2-M3G	8
						E2E-X□E/F1-M3	10
	L-shape 	2 m		XS3F-M422-402-R		E2E-X□D1-M3G	4
						E2E-X□D2-M3G	8
						E2E-X□E/F1-M3	10
		5 m			XS3F-M422-405-R	E2E-X□D1-M3G	4
						E2E-X□D2-M3G	8
						E2E-X□E/F1-M3	10

*1. Refer to Connection Diagrams on page 20 for information on Proximity Sensor and I/O Connector connections.

*2. Refer to Introduction to Sensor I/O Connectors for details and for information on Robotics Cables.

Connections for Sensor I/O Connectors

Connection diagram No.	Proximity Sensor			Sensor I/O Connector model number	Connections
	Type	Operation mode	Model		
1	DC 2-wire (IEC pin wiring)	NO	E2E-X□D1-M1G(J)	XS2F-D42□□A0-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	
2	DC 2-wire (previous pin wiring)		E2E-X□D1-M1	XS2F-D42□□D0 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	
3	DC 2-wire (no polarity)		E2E-X□D1-M1J-T	XS2F-D42□□C0-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	
4	DC 2-wire (M8 connector)		E2E-X□D1-M3G	XS3F-M42□□40□-R 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	
5	DC 2-wire (diagnostic type)		E2E-X□D1S-M1	XS2F-D42□□80-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	
6	DC 2-wire (IEC pin wiring)		E2E-X□D2-M1G	XS2F-D42□□80-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	
7	DC 2-wire (previous pin wiring)		E2E-X□D2-M1	XS2F-D42□□80-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	
8	DC 2-wire (M8 connector)		E2E-X□D2-M3G	XS3F-M42□□40□-R 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	


* Different from Proximity Sensor wire colors.

Connection diagram No.	Proximity Sensor			Sensor I/O Connector model number	Connections
	Type	Operation mode	Model		
9	DC 3-wire	NO	E2E-X□E/F1-M1	XS2F-D42□-□C0-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	
10	DC 3-wire (M8 connector)		E2E-X□E/F1-M3	XS3F-M42□-40□-R 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	
11	AC 2-wire	NO	E2E-X□Y1-M1	XS2F-A42□-□B0-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	
12		NC	E2E-X□Y2-M1	XS2F-A421□-90-A D: 2-m cable G: 5-m cable	
13	DC 2-wire (Smartclick connector)	NO	E2E-X□D1-M1TGJ-U	XS5F-D421□-80-P D: 2-m cable G: 5-m cable	
14	DC 2-wire (Smartclick connector)	NC	E2E-X□D2-M1TGJ-U	XS5F-D421□-80-P D: 2-m cable G: 5-m cable	

* Different from Proximity Sensor wire colors.

Refer to *Introduction to Sensor I/O Connectors* for details.

Pre-wired Models (Shielded)




Mounting Hole Dimensions



Dimension	M5	M8	M12
F (mm)	5.5 ^{+0.5} ₀ dia.	8.5 ^{+0.5} ₀ dia.	12.5 ^{+0.5} ₀ dia.

Diagram 4 E2E-X1□

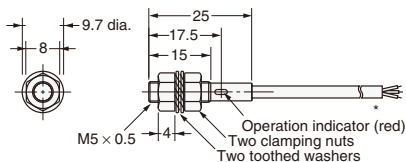

*2.9-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.14 mm², Insulator diameter: 0.9 mm), Standard length: 2 m
Robotics Cable Models:
2.9-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.15 mm², Insulator diameter: 1.05 mm), Standard length: 2 m
The cable can be extended up to 100 m (separate metal conduit).

Pre-wired Models (Unshielded)






Diagram 5 E2E-X2D□
E2E-X1R5E□/F□

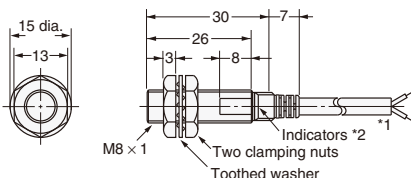


*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
Robotics Cable Models:
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
Models with Highly Oil-resistant Cables:
4-dia. polyurethane-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
The cable can be extended up to 200 m (separate metal conduit).
*2. D Models: Operation indicator (red) and setting indicator (green), E/F Models: Operation indicator (red)

Diagram 6 E2E-X4MD□
E2E-X2ME□/F□

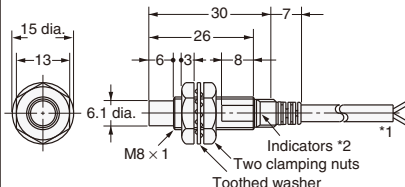


*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
Robotics Cable Models:
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
The cable can be extended up to 200 m (separate metal conduit).
*2. D Models: Operation indicator (red) and setting indicator (green), E/F Models: Operation indicator (red)

Diagram 7 E2E-X1R5Y□

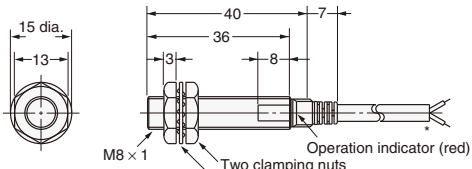


4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
The cable can be extended up to 200 m (separate metal conduit).

Diagram 8 E2E-X2MY□

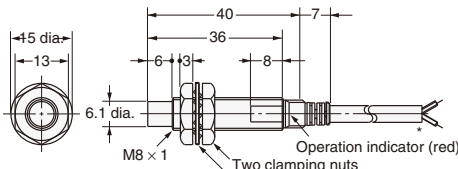


4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
The cable can be extended up to 200 m (separate metal conduit).

Diagram 9 E2E-X3D□ Pre-wired e-CON Connector Models
E2E-X2E□/F□

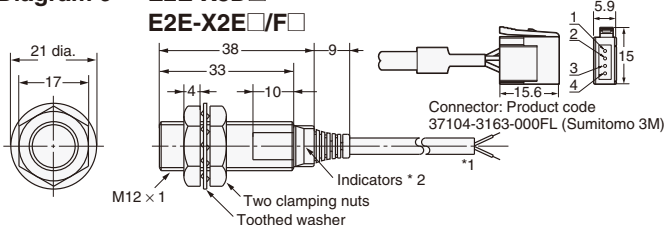

*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
Robotics Cable Models:
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
Models with Highly Oil-resistant Cables:
4-dia. polyurethane-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.
*2. D Models: Operation indicator (red) and setting indicator (green), E/F Models: Operation indicator (red)

Diagram 10 E2E-X8MD□ Pre-wired e-CON Connector Models
E2E-X5ME□/F□

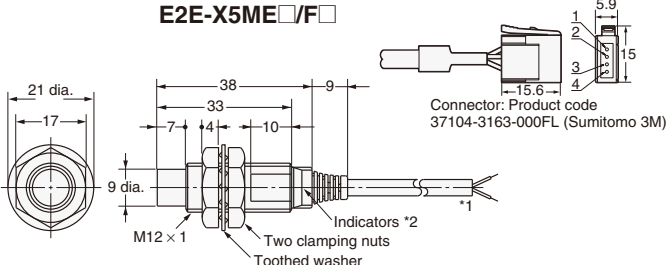

*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
Robotics Cable Models:
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.
*2. D Models: Operation indicator (red) and setting indicator (green), E/F Models: Operation indicator (red)

Diagram 11 E2E-X2Y□


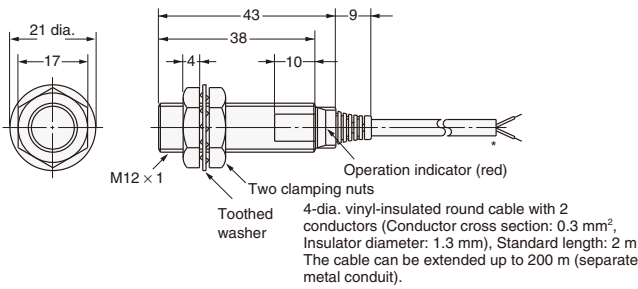


Diagram 12 E2E-X5MY□




Pre-wired Models (Shielded)

Mounting Hole Dimensions

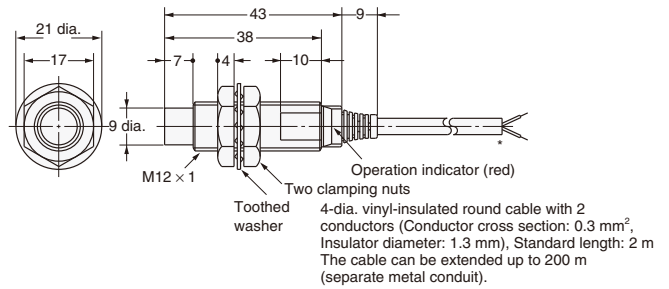

Dimension	M8	M12	M18	M30
F (mm)	8.5 ^{+0.5} dia.	12.5 ^{+0.5} dia.	18.5 ^{+0.5} dia.	30.5 ^{+0.5} dia.

Diagram 13 E2E-X3T1

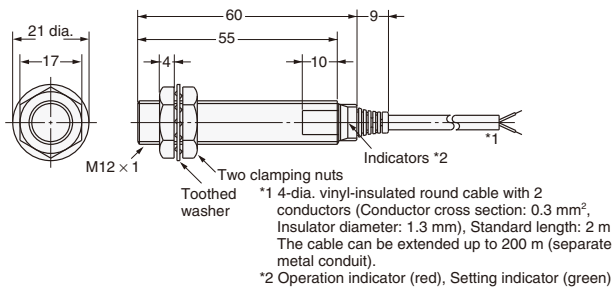

Pre-wired Models (Unshielded)




Diagram 14 E2E-X7D□/E2E-X5E□/F□
E2E-X5Y□/E2E-X7T1

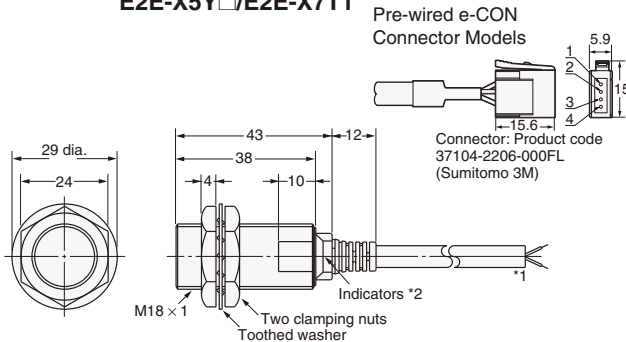


Diagram 15 E2E-X14MD□/E2E-X10ME□/F□
E2E-X10MY□



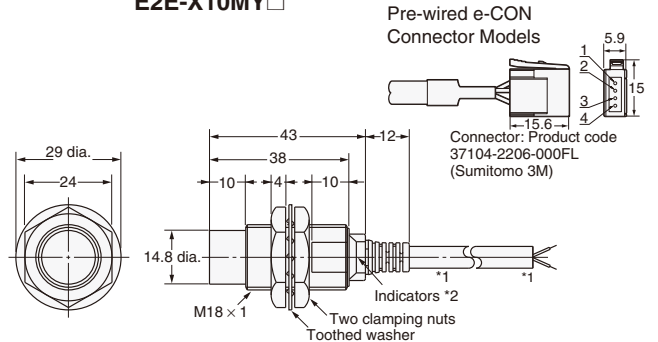


Diagram 16 E2E-X10D□/E2E-X10E□/F□
E2E-X10Y□/E2E-X10T1

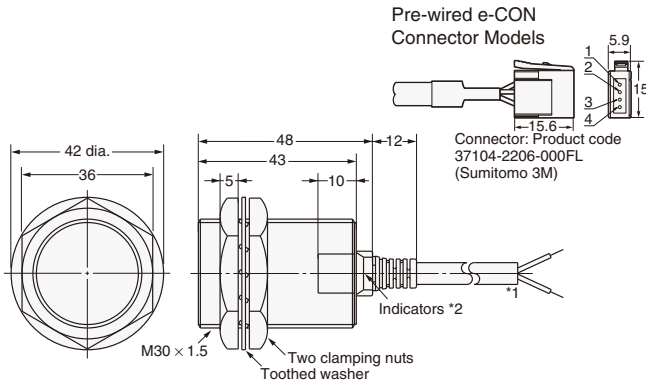


- *1. 6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.9 mm), Standard length: 2 m
- 6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.9 mm), Standard length: 2 m
- Robotics Cable Models:
- 6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.74 mm), Standard length: 2 m
- 6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.74 mm), Standard length: 2 m
- Models with Highly Oil-resistant:
- 6-dia. polyurethane-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.9 mm), Standard length: 2 m
- The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.
- *2. D/T Models: Operation indicator (red), Setting indicator (green)
- E/F/Y Models: Operation indicator (red)

Diagram 17 E2E-X20MD□/E2E-X18ME□/F□
E2E-X18MY□

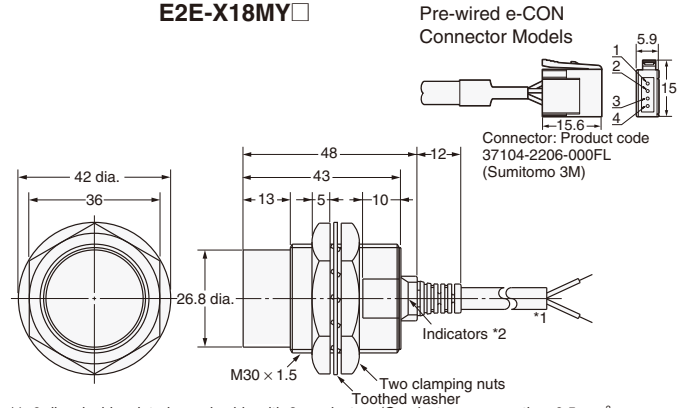

- *1. 6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.9 mm), Standard length: 2 m
- 6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.9 mm), Standard length: 2 m
- Robotics Cable Models:
- 6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.74 mm), Standard length: 2 m
- 6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.74 mm), Standard length: 2 m
- The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.
- *2. D/T Models: Operation indicator (red), Setting indicator (green)
- E/F/Y Models: Operation indicator (red)

M8 Connector Models (Shielded)



M8 Connector Models (Unshielded)




Diagram 28 E2E-X2D□-M3G/E2E-X1R5E1-M3/F□



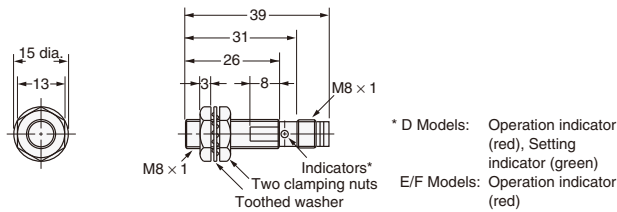


Diagram 29 E2E-X4MD□-M3G/E2E-X2ME1-M3/F□

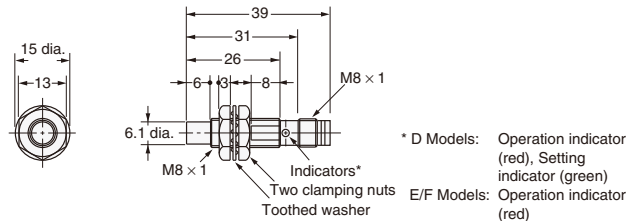

M12 Connector Models (Shielded)



M12 Connector Models (Unshielded)




Diagram 18 E2E-X2D□-M1(G)
E2E-X1R5E1-M1/F□

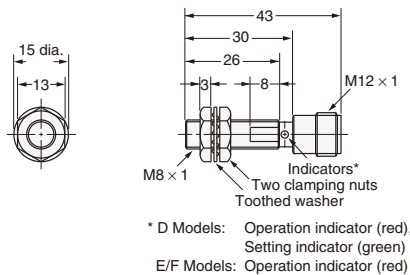
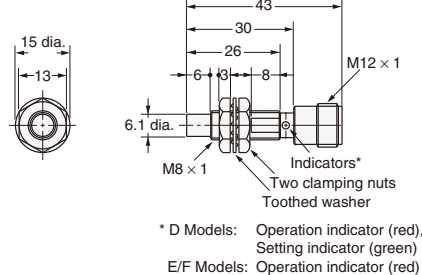
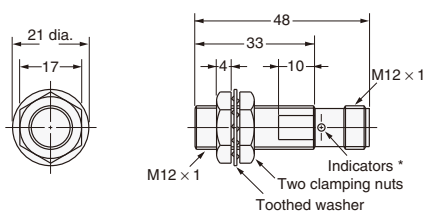


Diagram 19 E2E-X4MD□-M1(G)
E2E-X2ME1-M1/F□

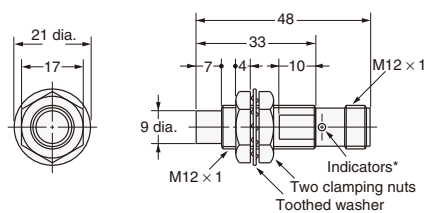


**Diagram 20 E2E-X3D□-M1(G)
E2E-X2E1-M1/F□**



* D Models: Operation indicator (red),
Setting indicator (green)
E/F Models: Operation indicator (red)

**Diagram 21 E2E-X8MD□-M1(G)
E2E-X5ME1-M1/F□**



* D Models: Operation indicator (red), Setting indicator (green)
E/F Models: Operation indicator (red)

Diagram 22 E2E-X2Y□-M1

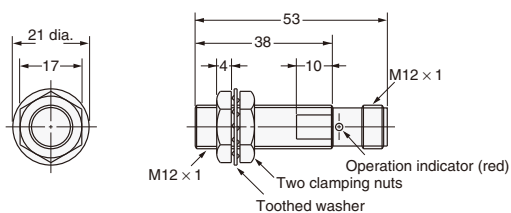
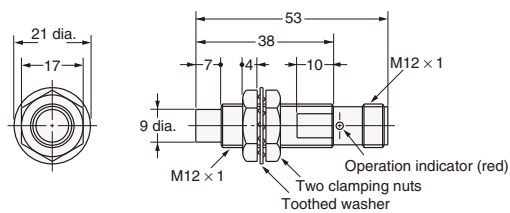
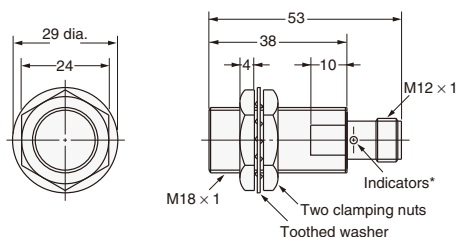


Diagram 23 E2E-X5MY□-M1

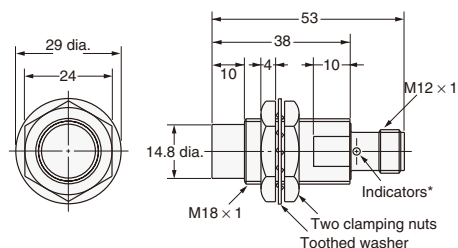


**Diagram 24 E2E-X7D□-M1(G)/E2E-X5E1-M1
E2E-X5Y□-M1**




* D Models: Operation indicator (red), Setting indicator (green)
E/Y Models: Operation indicator (red)

**Diagram 25 E2E-X14MD□-M1(G)/E2E-X10ME1-M1
E2E-X10MY□-M1**




* D Models: Operation indicator (red), Setting indicator (green)
E/Y Models: Operation indicator (red)

**Diagram 26 E2E-X10D□-M1(G)/E2E-X10E1-M1
E2E-X10Y□-M1**

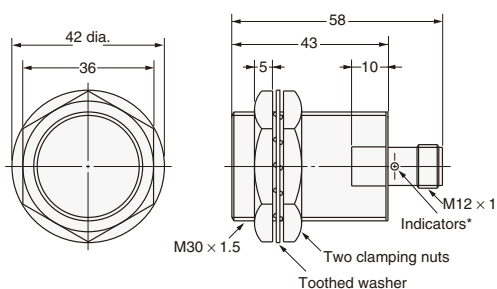


* D Models: Operation indicator (red), Setting indicator (green)
E/Y Models: Operation indicator (red)

**Diagram 27 E2E-X20MD□-M1(G)/E2E-X18ME1-M1
E2E-X18MY□-M1**

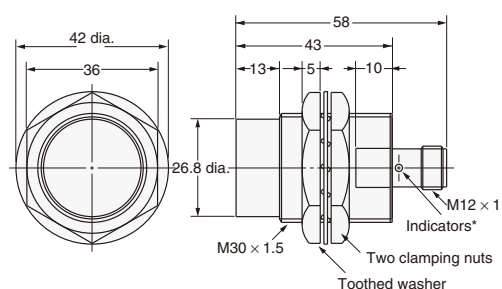

* D Models: Operation indicator (red), Setting indicator (green)
E/Y Models: Operation indicator (red)


Mounting Hole Dimensions



Dimensions	M8	M12	M18	M30
F (mm)	8.5 ^{+0.5} ₀ dia.	12.5 ^{+0.5} ₀ dia.	18.5 ^{+0.5} ₀ dia.	30.5 ^{+0.5} ₀ dia.



Pre-wired Connector Models (Shielded)

Mounting Hole Dimensions




Dimension	M12	M18	M30
F (mm)	12.5 ^{+0.5} ₀ dia.	18.5 ^{+0.5} ₀ dia.	30.5 ^{+0.5} ₀ dia.

Diagram 30 E2E-X2D1-M1TGJ-U *3

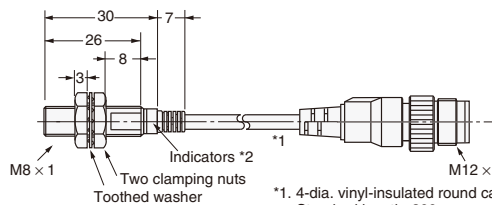



- *1. 4-dia. vinyl-insulated round cable, Standard length: 300 mm
- *2. Operation indicator (red), Setting indicator (green)
- *3. The connectors for M1TGJ models are XS5 Smartclick connectors

Diagram 31 E2E-X3D1-M1GJ
E2E-X3D1-M1J-T
E2E-X3D1-M1TGJ-U *3

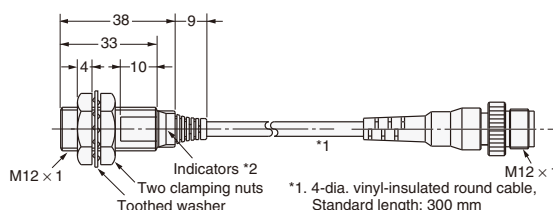



- *1. 4-dia. vinyl-insulated round cable, Standard length: 300 mm
- *2. Operation indicator (red), Setting indicator (green)
- *3. The connectors for M1TGJ models are XS5 Smartclick connectors

Diagram 33 E2E-X7D1-M1GJ
E2E-X7D1-M1J-T
E2E-X7D1-M1TGJ-U *3

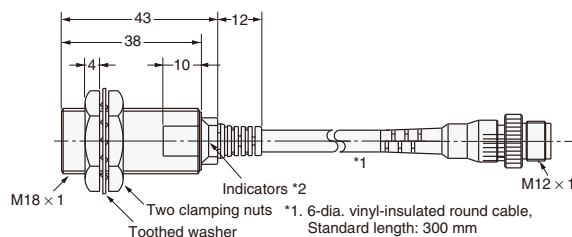

- *1. 6-dia. vinyl-insulated round cable, Standard length: 300 mm
- *2. Operation indicator (red), Setting indicator (green)
- *3. The connectors for M1TGJ models are XS5 Smartclick connectors


Diagram 35 E2E-X10D1-M1GJ
E2E-X10D1-M1J-T
E2E-X10D1-M1TGJ-U *3

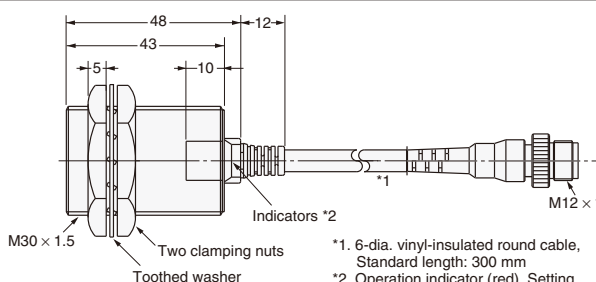

- *1. 6-dia. vinyl-insulated round cable, Standard length: 300 mm
- *2. Operation indicator (red), Setting indicator (green)
- *3. The connectors for M1TGJ models are XS5 Smartclick connectors

Pre-wired Connector Models (Unshielded)

Diagram 32 E2E-X8MD1-M1GJ

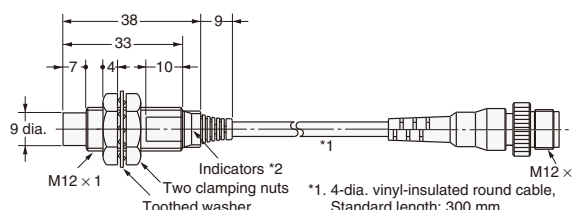

- *1. 4-dia. vinyl-insulated round cable, Standard length: 300 mm
- *2. Operation indicator (red), Setting indicator (green)

Diagram 34 E2E-X14MD1-M1GJ




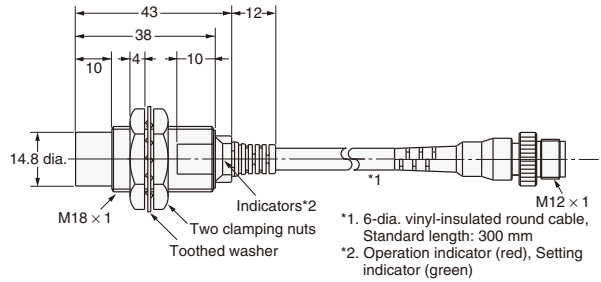






Diagram 36 E2E-X20MD1-M1GJ

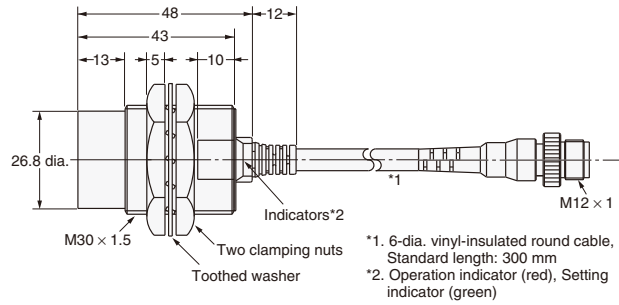

Dimensions for Proximity Sensors with Sensor I/O Connectors

Shielded Models

Unshielded Models



Dimensions with the XS2F Connected (Unit: mm)

Dimension		L1	L2
Sensor diameter			
M8		Approx. 75	Approx. 62
M12*	DC	Approx. 80	Approx. 67
	AC	Approx. 85	Approx. 72
M18		Approx. 85	Approx. 72
M30		Approx. 90	Approx. 77

* The overall length of the Sensor is different between AC and DC Models for Sensors with diameters of M12. This will change the dimension when the I/O Connector is connected.

Dimensions with the XS3F Connected (Unit: mm)

Dimension		L1	L2
Sensor diameter			
M8		Approx. 65	Approx. 54

Accessories (Order Separately)

Sensor I/O Connectors

Refer to *Introduction to Sensor I/O Connectors* for details.

- Mounting Brackets**
- Protective Covers**
- Sputter Protective Covers**

Refer to Y92□ for details.