

# 32.768kHz SMD LOW PROFILE CRYSTAL

ABS07

ABS07



RoHS  
Compliant



3.2 x 1.5 x 0.9 mm

## FEATURES:

- Low frequency in small size SMD
- 0.9mm height ideal for high density circuit boards
- Ceramic package offers excellent environmental & heat resistance
- Extended temperature -40°C to +85°C for industrial applications

## APPLICATIONS:


- Wide range in communication & measuring equipment
- Commercial & Industrial applications
- Automotive electronics applications
- Wireless communications
- PDA and Palm Pilots

## STANDARD SPECIFICATIONS:

### PARAMETERS

ABRACON P/N	ABS07
Nominal Frequency	32.768 kHz
Operating Temperature	-40°C to + 85°C
Turn-over Temperature	+25°C to ±5°C
Storage Temperature	-55°C to +125°C
Frequency Tolerance	±20 ppm max.
Temperature Coefficient ( $\beta$ )	- 0.034±0.006 ppm/T <sup>2</sup>
Equivalent Series Resistance	70 kohms max.
Load Capacitance CL	12.5 pF (see option)
Drive Level	1.0 $\mu$ W max.
Aging (first year) 25°C	± 3 ppm max.
Insulation Resistance	500 M $\Omega$ with 100 Vdc ±15V
Shunt capacitance Co:	1.05pF typ.
Quality Factor Q:	30K typ.

### TUNING FORK CRYSTAL TEMPERATURE CURVE

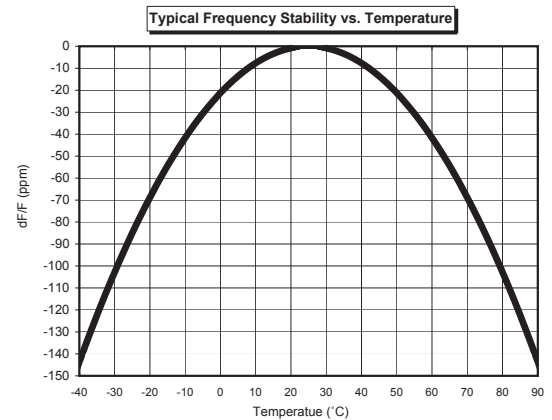

## OPTIONS AND PART IDENTIFICATION:

[Left blank if standard]


ABS07-32.768kHz-□ - □ - □

Load Capacitance		Freq. Tolerance		Packaging	
Blank	12.5pF	1	± 10 ppm	Blank	Bulk
9	9pF	4	± 30 ppm	T	Tape and Reel
7	7pF				

\*Contact ABRACON for non-standard load capacitance

# 32.768kHz SMD LOW PROFILE CRYSTAL

ABS07




3.2 x 1.5 x 0.9 mm

ABS07



RoHS  
Compliant

## OUTLINE DRAWING:

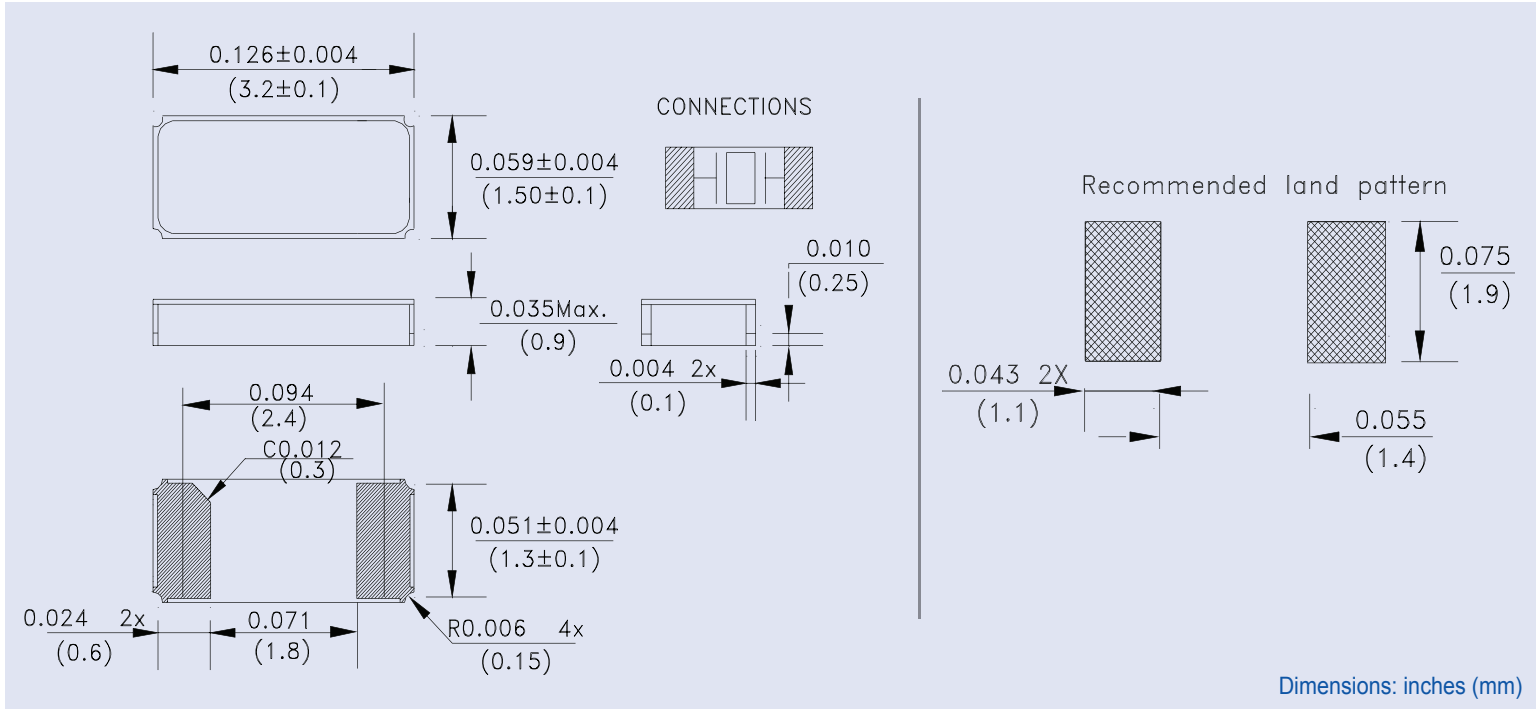

## TAPE & REEL: T = Tape and reel 3,000pcs/reel

