


- Features:
- General purpose resistor ideal for commercial/industrial applications
 - Flame retardant coatings standard
 - Flameproof version available as CFF
 - Panasert available on selected sizes; contact factory
 - Auto sequencing/insertion compatible
 - CFM (mini) ideal choice when size constraints apply
 - Cut and formed product is available on select sizes; contact factory
 - Standard lead wire for CF/CFM is copper plated steel, with 100% tin over plate
 - 100% tin plate on copper wire is available as type CFQ/CFQM
 - RoHS compliant / lead-free



Electrical Specifications						
Type / Code	Power Rating (Watts) @ 70°C	Maximum Working Voltage (1)	Maximum Overload Voltage	Dielectric Withstanding Voltage	Ohmic Range (Ω) and Tolerance	
					2%	5%
CF18	0.125W	250V	500V	350V	10 - 1M	1 - 22M
CF14	0.25W	350V	600V	350V	1 - 1M	1 - 22M
CF12	0.5W	350V	700V	600V	10 - 1M	1 - 10M
CF1	1W	500V	1,000V	600V	1 - 1M	1 - 10M
CF2	2W	500V	1,000V	600V	10 - 1M	1 - 10M
CFM14	0.25W	250V	500V	350V	10 - 1M	1 - 10M
CFM12	0.5W	350V	600V	350V	10 - 1M	1 - 10M
CFM1	1W	600V	1,000V	600V	10 - 1M	1 - 10M

(1) Lesser of \sqrt{PR} or maximum working voltage.

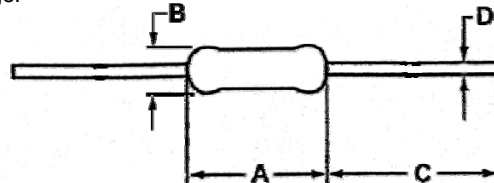

Mechanical Specifications					
Type / Code	A Body Length	B Body Diameter	C Lead Length(Bulk)	D Lead Diameter	Unit
CF18	0.13 ± 0.01	0.07 ± 0.01	1.10 ± 0.12	0.018 ± 0.003	inches
	3.3 ± 0.3	1.7 ± 0.3	28.0 ± 3.0	0.45 ± 0.08	mm
CF14	0.26 ± 0.02	0.09 ± 0.01	1.10 ± 0.12	0.022 ± 0.003	inches
	6.5 ± 0.5	2.3 ± 0.3	28.0 ± 3.0	0.55 ± 0.08	mm
CF12	0.33 ± 0.04	0.11 ± 0.02	1.18 ± 0.12	0.022 ± 0.002	inches
	8.5 ± 1.0	2.7 ± 0.5	30.0 ± 3.0	0.56 ± 0.05	mm
CF1	0.43 ± 0.04	0.18 ± 0.02	1.18 ± 0.12	0.028 ± 0.004	inches
	11.0 ± 1.0	4.5 ± 0.5	30.0 ± 3.0	0.70 ± 0.1	mm
CF2	0.59 ± 0.04	0.20 ± 0.02	1.18 ± 0.12	0.031 ± 0.004	inches
	15.0 ± 1.0	5.0 ± 0.5	30.0 ± 3.0	0.8 ± 0.1	mm
CFM14	0.13 ± 0.01	0.07 ± 0.01	1.10 ± 0.12	0.018 ± 0.003	inches
	3.3 ± 0.3	1.7 ± 0.3	28.0 ± 3.0	0.45 ± 0.08	mm
CFM12	0.26 ± 0.04	0.09 ± 0.01	1.10 ± 0.12	0.022 ± 0.003	inches
	6.5 ± 1.0	2.3 ± 0.3	28.0 ± 3.0	0.55 ± 0.08	mm
CFM1	0.35 ± 0.02	0.14 ± 0.02	1.10 ± 0.12	0.024 ± 0.002	inches
	9.0 ± 0.5	3.5 ± 0.5	28.0 ± 3.0	0.6 ± 0.05	mm

Performance Characteristics		
Test	Standard / Method	Test Results
Short Time Overload	EIA-RS-172-B 3.2.6	± 0.5%
Resistance to Solder Heat	MIL-STD 202 Method 210	± 0.5%
Dielectric Withstanding Voltage	JIS C 5202 5.6	± 0.5%
Load Life	MIL-STD 202 Method 108	± 1%
Terminal Strength	MIL-STD 202 Method 211	± 0.2%
Moisture Resistance	MIL-STD 202 Method 106	± 0.5%

Operating Temperature Range: -55°C to +155°C

How to Order

1 2 3 4 5 6 7 8 9 10

C
F
1
2
J
T
1
0
0
K

Product Series		Size	Power Rating	Tolerance		Code	Description	Size	Quantity	Resistance Value
Code	Description			Code	Tol					
CF	Standard	18	0.125W	G	2%	B	bulk	CF18, CFM14, CF14, CFM12	1,000	Four characters with the multiplier used as the decimal holder. 10 ohm = 10R0 10.2 Kohm = 10K2 1 Mohm = 1M00
CFF	Flameproof	14	0.25W	J	5%	T	tape and reel	CF12, CFM1, CF1, CF2	5,000	
CFM	Mini	12	0.5W					CF18, CFM14, CF14, CFM12, CF12, PCF14, PCFM12		
PCF	Panasert CF14	1	1W					CFM1		
PCFM	Panasert CF12	2	2W			CF1	2,000			
CFQ	Tin plating on copper wire					CF2	1,000			
CFQM	Tin plating (mini)					A	ammo	CF18, CFM14, CF14, CFM12, CFM1	5,000	
PCFQ	Tin plating on copper wire Panasert							CF12, PCF14, PCFM12	2,000	
								CF1, CF2	1,000	

Legacy Part Number (before January 3, 2011):

SEI Type		Code		Nominal Resistance	Tolerance	Packaging				
CF		1/2		100K	5%	R				
Code	Description	Code	Wattage		Tolerance	Code →	A	R	T	
CF	Standard	1/8	0.125W		2%	SEI Types	Bulk	Tape & Reel	Tape & Box (Ammo Box)	
CFF	Flameproof	1/4	0.25W		5%					
CFM	Mini	1/2	0.5W							
PCF	Panasert CF 1/4	1	1W							
PCFM	Panasert CF 1/2	2	2W				CF18	1,000	5,000	5,000
CFQ	Tin plating on copper wire						CFM14			
CFQM	Tin plating (mini)						CF14			
PCFQ	Tin plating on copper wire Panasert						CFM12	1,000	5,000	2,000
							CF12	1,000	5,000	2,000
							CFM1	1,000	2,500	5,000
						CF1	1,000	2,000	1,000	
						CF2	1,000	1,000	1,000	
						PCF14		5,000	2,000	
						PCFM12	N/A	5,000	2,000	