

M5M5118P, -15

16384-BIT (2048-WORD BY 8-BIT) CMOS STATIC RAM

DESCRIPTION

The M5M5118P series of 2048-word by 8-bit asynchronous silicon gate CMOS static RAM operates on a single 5V power supply and is designed for easy use in applications requiring battery back-up.

Two chip select inputs, \overline{S}_1 and \overline{S}_2 , are available to provide the minimum standby current with battery back-up. The series is packaged in a standard 24-pin plastic DIL package.

FEATURES


Type name	Access time (max)	Current consumption	
		Active (max)	Stand-by (max)
M5M5118P-15	150 ns	50 mA	15 μ A
M5M5118P	200 ns		

- Single 5V power supply.
- External clock and refresh operation not required.
- Data can be held with 2V supply voltage.
- All inputs and outputs are directly TTL compatible.
- All outputs are 3-state with OR-tie capability.
- Easy expansion of memory capacity with chip select signal.
- Common input/output for data pins

APPLICATIONS

Battery drive, small-capacity memory units with battery back-up

PIN CONFIGURATION (TOP VIEW)

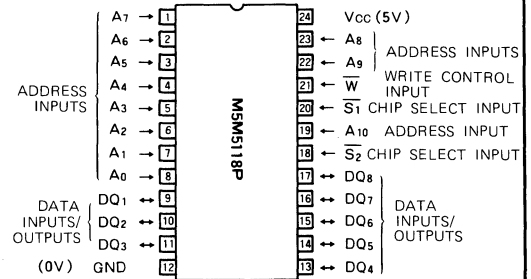


Outline 24 P4

FUNCTION

The M5M5118P series has a 2048-word by 8-bit configuration. It operates on a single 5V supply and its inputs/outputs are directly TTL compatible. Its completely static circuitry obviates the need for external clock and refresh operations and makes it very easy to use. The data of the DQ pin are written when the address is designated by address signals $A_0 \sim A_{10}$, the \overline{S}_1 and \overline{S}_2 signals turn low-level, and the \overline{W} signal is set low.

When for the reading operation the \overline{W} signal is set high, the \overline{S}_1 and \overline{S}_2 signals are set low, pin DQ is set to the output

BLOCK DIAGRAM

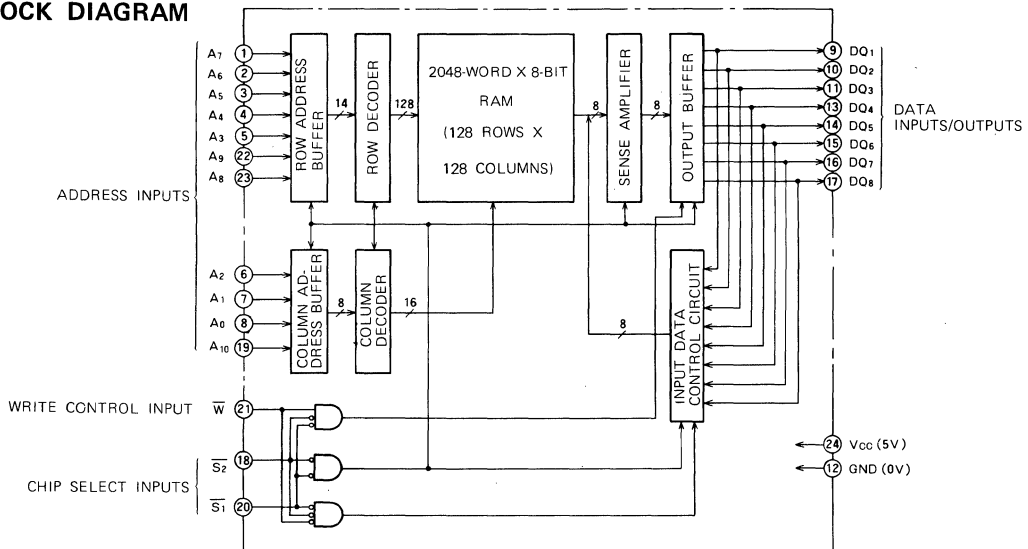

16384-BIT (2048-WORD BY 8-BIT) CMOS STATIC RAM

mode and the address is designated by signals $A_0 \sim A_{10}$, the data of the designated address are output to pin DQ.

When signal \overline{S}_1 or \overline{S}_2 is set high, the chip is set to a non-select status in which neither reading nor writing is possible. Since the output floats (high-impedance state), OR-tie is possible with the other chip output pins.

The standby mode is established when signal \overline{S}_2 , or signal \overline{S}_1 (with signal \overline{S}_2 at V_{CC} or GND), is set to V_{CC} . The supply current is now reduced to the very low level of 15 μ A (max) and data in the memory are retained even if the supply voltage falls to 2V, permitting power-down

during non-operation or battery back-up during power failures.

OPERATION MODES

\overline{S}_1	\overline{S}_2	\overline{W}	Mode	DQ	I_{CC}
X	H	X	Non-select	High impedance	Standby
H	X	X	Non-select	High impedance	Standby
L	L	L	Write	D _{IN}	Active
L	L	H	Read	D _{OUT}	Active

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Conditions	Limits	Unit
V_{CC}	Supply voltage	With respect to GND	-0.3 ~ 7	V
V_I	Input voltage		-0.3 ~ $V_{CC} + 0.3$	V
V_O	Output voltage		0 ~ V_{CC}	V
P_d	Power dissipation	$T_a = 25^\circ\text{C}$	700	mW
T_{opr}	Operating free-air ambient temperature		0 ~ 70	$^\circ\text{C}$
T_{stg}	Storage temperature		-60 ~ 150	$^\circ\text{C}$

RECOMMENDED OPERATING CONDITIONS ($T_a = 0 \sim 70^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min	Typ	Max	
V_{CC}	Supply voltage	4.5	5	5.5	V
GND	Supply voltage		0		V
V_{IL}	Low-level input voltage	-0.3		0.8	V
V_{IH}	High-level input voltage	2.2		$V_{CC} + 0.3$	V

ELECTRICAL CHARACTERISTICS ($T_a = 0 \sim 70^\circ\text{C}$, $V_{CC} = 5V \pm 10\%$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{IH}	High-level input voltage		2.2		$V_{CC} + 0.3$	V
V_{IL}	Low-level input voltage		-0.3		0.8	V
V_{OH}	High-level output voltage	$I_{OH} = -1\text{mA}$	2.4			V
V_{OL}	Low-level output voltage	$I_{OL} = 2.1\text{mA}$			0.4	V
I_I	Input current	$V_I = 0 \sim V_{CC}$			± 1	μA
I_{OZH}	Off-state high-level output current	\overline{S}_1 or $\overline{S}_2 = V_{IH}, V_O = 2.4V \sim V_{CC}$			1	μA
I_{OZL}	Off-state low-level output current	\overline{S}_1 or $\overline{S}_2 = V_{IH}, V_O = 0V$			-1	μA
I_{CC1}	Supply current	M5M5118P-15	$V_I(\overline{S}_1) = V_I(\overline{S}_2) = 0V$ Output pin open		45	mA
		M5M5118P	Other inputs = V_{CC}		30	
I_{CC2}	Supply current	M5M5118P-15	$V_I(\overline{S}_1) = V_I(\overline{S}_2) = V_{IL}$ Output pin open		50	mA
		M5M5118P	Other inputs = V_{IH}		35	
I_{CC3}	Standby supply current	① $\overline{S}_2 = V_{CC} - 0.2V$, Other inputs = $0 \sim V_{CC}$ ② $\overline{S}_1 = V_{CC} - 0.2V, \overline{S}_2 \leq 0.2V$, Other inputs = $0 \sim V_{CC}$		15	μA	
I_{CC4}	Standby supply current	$\overline{S}_2 \leq 0.2V, \overline{S}_1 = V_{IH}$, Other inputs = $0 \sim V_{CC}$		2	mA	
C_i	Input capacitance ($T_a = 25^\circ\text{C}$)	$V_I = \text{GND}, V_I = 25\text{mVrms}, f = 1\text{MHz}$		6	pF	
C_o	Output capacitance ($T_a = 25^\circ\text{C}$)	$V_O = \text{GND}, V_O = 25\text{mVrms}, f = 1\text{MHz}$		8	pF	

Note 1: Current flowing into an IC shall be positive (no sign).
 2: Typical values: $V_{CC} = 5V, T_a = 25^\circ\text{C}$.

16384-BIT (2048-WORD BY 8-BIT) CMOS STATIC RAM

SWITCHING CHARACTERISTICS ($T_a = 0 \sim 70^\circ\text{C}$, $V_{CC} = 5V \pm 10\%$, unless otherwise noted)

READ CYCLE

Symbol	Parameter	M5M5118P-15			M5M5118P			Unit
		Limits			Limits			
		Min	Typ	Max	Min	Typ	Max	
t_{CR}	Read cycle time	150			200			ns
$t_{a(A)}$	Address access time			150			200	ns
$t_{a(S_1)}$	Chip select 1 access time			150			200	ns
$t_{a(S_2)}$	Chip select 2 access time			150			200	ns
$t_{dis(S_2)}$	Output disable time from S1			50			60	ns
$t_{dis(S_1)}$	Output disable time from S2			50			60	ns
$t_{en(S_1)}$	Output enable time from S1	15			15			ns
$t_{en(S_2)}$	Output enable time from S2	15			15			ns
$t_{v(A)}$	Data valid time from address	20			20			ns

TIMING REQUIREMENTS ($T_a = 0 \sim 70^\circ\text{C}$, $V_{CC} = 5V \pm 10\%$, unless otherwise noted)

WRITE CYCLE

Symbol	Parameter	M5M5118P-15			M5M5118P			Unit
		Limits			Limits			
		Min	Typ	Max	Min	Typ	Max	
t_{cW}	Write cycle time	150			200			nn
$t_{w(W)}$	Write pulse width	90			120			ns
$t_{su(A)}$	Address set-up time	0			0			ns
$t_{su(S)}$	Chip select set-up time	90			120			ns
$t_{su(D)}$	Data set-up time	40			60			ns
$t_h(D)$	Data hold time	0			0			ns
$t_{rec(W)}$	Write recovery time	10			10			ns
$t_{dis(W)}$	Output disable time from write			50			60	ns
$t_{en(W)}$	Output enable time from write	15			15			ns

POWER-DOWN CHARACTERISTICS

ELECTRICAL CHARACTERISTICS ($T_a = 0 \sim 70^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$V_{CC(PD)}$	Power-down supply voltage		2			V
$V_I(S)$	Chip select input voltage	$2.2V \leq V_{CC(PD)}$	2.2			V
		$2V \leq V_{CC(PD)} \leq 2.2V$		$V_{CC(PD)}$		V
$I_{CC(PD)}$	Power-down supply current	$V_{CC} = 3V$, Other inputs = 3V			10	μA

Note 3: When $\overline{S_1}$ or $\overline{S_2}$ is operated at 2.2V (V_{IH} min), the supply current at which $V_{CC(PD)}$ is between 4.5V and 2.4V, is specified by I_{CC4} .


TIMING REQUIREMENTS ($T_a = 0 \sim 70^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$t_{su(PD)}$	Power-down set-up time		0			ns
$t_{rec(PD)}$	Power-down recovery time		t_{CR}			ns


16384-BIT (2048-WORD BY 8-BIT) CMOS STATIC RAM

TIMING DIAGRAM

Read cycle

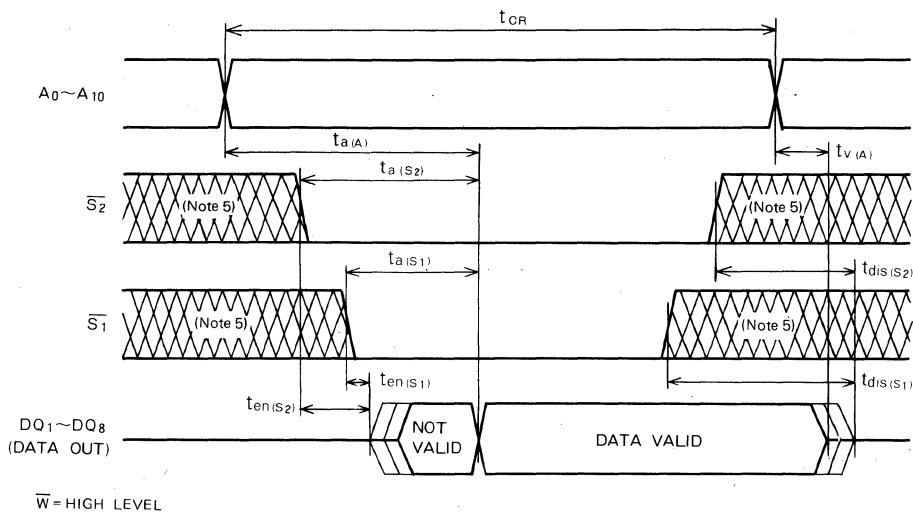


Write cycle (\bar{W} control)

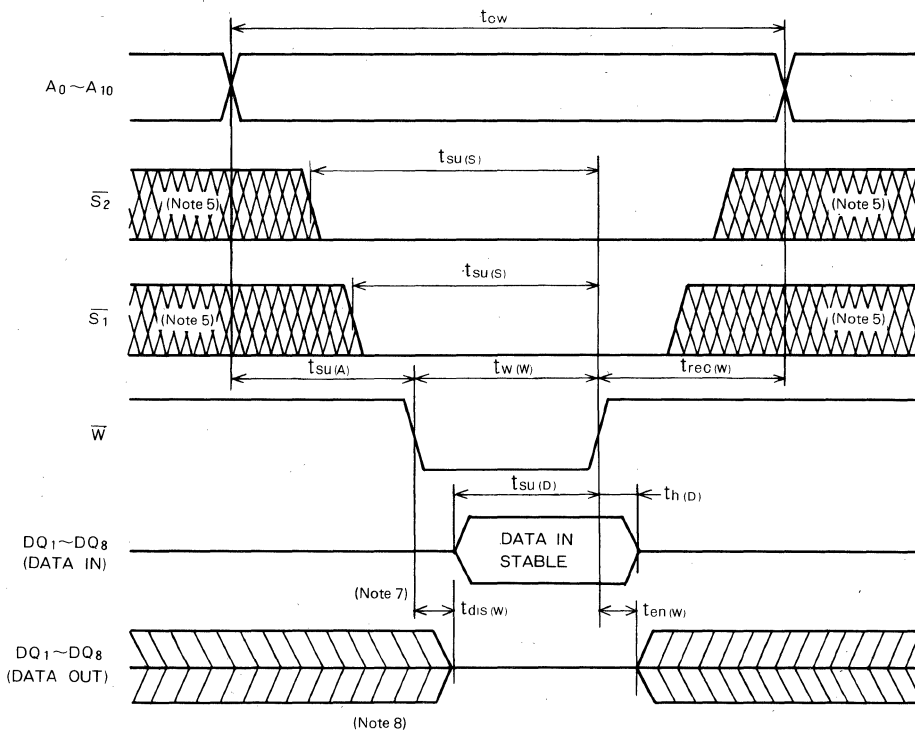

16384-BIT (2048-WORD BY 8-BIT) CMOS STATIC RAM

Write cycle (\overline{S} control)

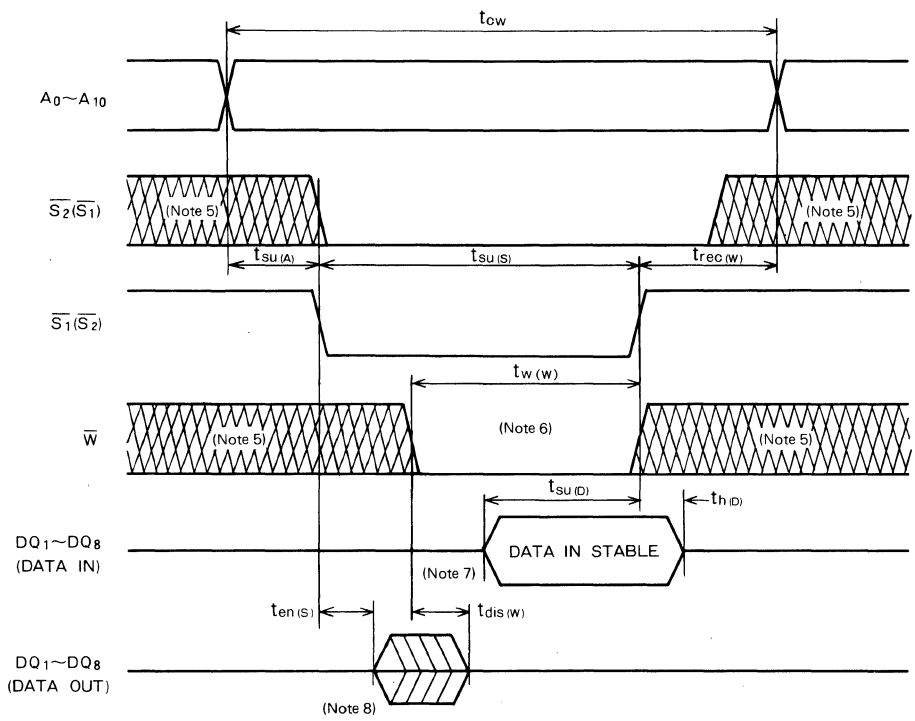

Note 4: Test conditions
 Input pulse level: 0.4 ~ 2.4V
 Input pulse risetime and falltime: 10ns
 Load: 1TTL, $C_L = 100\text{pF}$
 Reference level: 1.5V

Note 5: Hatching indicates the don't care inputs.
 Note 6: Writing is performed while \overline{S} and \overline{W} are in the low-level overlap period.
 Note 7: The output is kept in the high-impedance state when \overline{W} falls simultaneously with, or before, the \overline{S} fall.
 Note 8: A reverse-phase signal should not be supplied when pin DQ is in the output mode.

POWER-DOWN CHARACTERISTICS

