

- Features:
- ✓ Precision tolerances to $\pm 0.01\%$
 - ✓ TCR down to $\pm 5\text{ppm}/^\circ\text{C}$
 - ✓ RoHS compliant / lead-free available (RNCF)
 - ✓ E96 and E24 values are standard; E192 are built to order with no part marking
 - ✓ Wide R-value range
 - ✓ Consult factory for tighter tolerances
 - ✓ 2010 and 2512 sizes now available



Electrical Specifications										
Type / Code	Package Size	Power Rating (Watts) @ 70°C	Maximum Working Voltage [Ⓛ]	Maximum Overload Voltage	Resistance Temperature Coefficient	Ohmic Range and Tolerance				
						0.01%	0.05%	0.1%	0.5%	1%
RNC 05	0201	0.032W (0.050W [Ⓛ])	15V	30V	$\pm 25\text{ ppm}/^\circ\text{C}$ $\pm 200\text{ ppm}/^\circ\text{C}$	-	-	-	33Ω - 22KΩ	100Ω - 1MΩ
RNC 10	0402	0.063W	25V	50V	$\pm 5\text{ ppm}/^\circ\text{C}$ $\pm 10\text{ ppm}/^\circ\text{C}$ $\pm 25\text{ ppm}/^\circ\text{C}$ $\pm 50\text{ ppm}/^\circ\text{C}$	49.9Ω - 3K 49.9Ω - 12K	49.9Ω - 3K 49.9Ω - 12K	49.9Ω - 3K 49.9Ω - 12K	100Ω - 3K 47Ω - 100K	-
RNC 16	0603	0.063W (0.100W [Ⓛ])	50V	100V	$\pm 5\text{ ppm}/^\circ\text{C}$ $\pm 10\text{ ppm}/^\circ\text{C}$ $\pm 25\text{ ppm}/^\circ\text{C}$ $\pm 50\text{ ppm}/^\circ\text{C}$	25Ω - 15K 25Ω - 100K	25Ω - 15K 25Ω - 100K	25Ω - 15K 4.7Ω - 332K	- -	-
RNC 20	0805	0.100W (0.125W [Ⓛ])	100V	200V	$\pm 5\text{ ppm}/^\circ\text{C}$ $\pm 10\text{ ppm}/^\circ\text{C}$ $\pm 25\text{ ppm}/^\circ\text{C}$ $\pm 50\text{ ppm}/^\circ\text{C}$	25Ω - 30K 25Ω - 200K	25Ω - 30K 4.7Ω - 500K	25Ω - 30K 4.7Ω - 500K	- -	-
RNC 32	1206	0.125W (0.250W [Ⓛ])	150V	300V	$\pm 5\text{ ppm}/^\circ\text{C}$ $\pm 10\text{ ppm}/^\circ\text{C}$ $\pm 25\text{ ppm}/^\circ\text{C}$ $\pm 50\text{ ppm}/^\circ\text{C}$	25Ω - 50K 25Ω - 500K	25Ω - 50K 25Ω - 500K	25Ω - 50K 4.7Ω - 1M	- -	-
RNC 50	1210	0.200W (0.250W [Ⓛ])	150V	300V	$\pm 5\text{ ppm}/^\circ\text{C}$ $\pm 10\text{ ppm}/^\circ\text{C}$ $\pm 25\text{ ppm}/^\circ\text{C}$ $\pm 50\text{ ppm}/^\circ\text{C}$	25Ω - 50K 25Ω - 500K	25Ω - 50K 25Ω - 500K	25Ω - 50K 4.7Ω - 1M	- -	-
RNC 57	2010	0.250W (0.500W [Ⓛ])	150V	300V	$\pm 5\text{ ppm}/^\circ\text{C}$ $\pm 10\text{ ppm}/^\circ\text{C}$ $\pm 25\text{ ppm}/^\circ\text{C}$ $\pm 50\text{ ppm}/^\circ\text{C}$	25Ω - 100K 25Ω - 500K	25Ω - 100K 25Ω - 500K	25Ω - 100K 4.7Ω - 1M	- -	-
RNC 63	2512	0.500W (1.000W [Ⓛ])	150V	300V	$\pm 5\text{ ppm}/^\circ\text{C}$ $\pm 10\text{ ppm}/^\circ\text{C}$ $\pm 25\text{ ppm}/^\circ\text{C}$ $\pm 50\text{ ppm}/^\circ\text{C}$	25Ω - 100K 25Ω - 500K	25Ω - 100K 25Ω - 500K	25Ω - 100K 4.7Ω - 1M	- -	-

Ⓛ Lesser of $\sqrt{\text{PR}}$ or maximum working voltage.



Ⓜ Higher power rating for each package size is valid if ambient temp $\leq 80^\circ\text{C}$ and terminal temp $\leq 105^\circ\text{C}$

How to Order

SEI Type		Code			TCR		Nominal Resistance	Tolerance	Packaging				
RNC		20			T9		4.75K	0.5%	R				
Type	Description	Code	Wattage	Size	TCR			Tolerance	Values	SEI Types	Pkg Qty	Code	Description
RNC	Standard	05	0.050W	0201	T1	100ppm		0.01%	E192 [Ⓛ] , E96, E24	5, 10	10,000	R	7" reel
RNCF	RoHS	10	0.063W	0402	T2	50ppm		0.05%	E192 [Ⓛ] , E96, E24	16, 20, 30	5,000	R	
		16	0.100W	0603	T9	25ppm		0.10%	E192 [Ⓛ] , E96, E24		1,000	I	
		20	0.125W	0805	TB	10ppm		0.50%	E192 [Ⓛ] , E96, E24	50	5,000	R	
		32	0.250W	1206	TA	5ppm		1.00%	E96, E24	57, 63	4,000	R	
		50	0.250W	1210				5.00%	E24		1,000	I	
		57	0.500W	2010									
		63	1.000W	2512									

Ⓛ non-standard

Mechanical Specifications

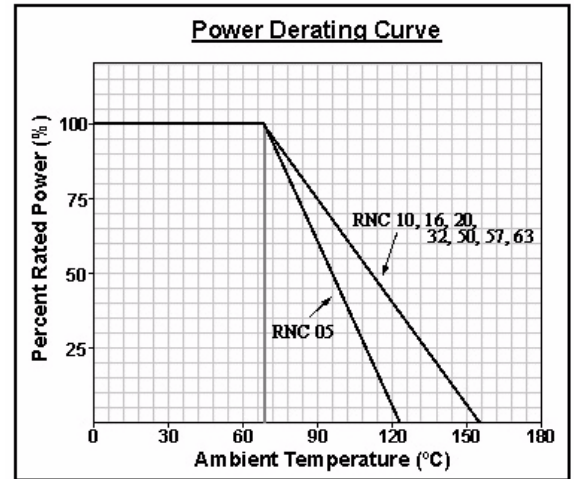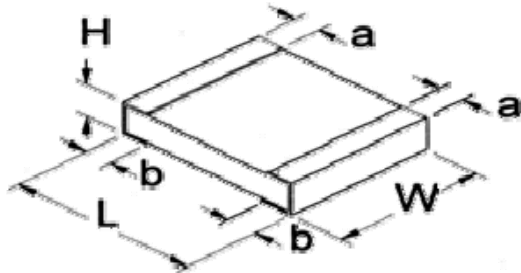

Mechanical Specifications						
Type / Code	L Body Length	W Body Width	H Body Height	a Top Termination	b Bottom Termination	Units
RNC 05	0.024 ± 0.002 0.60 ± 0.05	0.012 ± 0.002 0.30 ± 0.05	0.009 ± 0.001 0.23 ± 0.030	0.005 ± 0.002 0.12 ± 0.05	0.005 ± 0.002 0.12 ± 0.05	inches mm
RNC 10	0.039 ± 0.002 1.00 ± 0.05	0.020 ± 0.002 0.50 ± 0.05	0.014 ± 0.002 0.35 ± 0.05	0.008 ± 0.004 0.20 ± 0.10	0.010 ± 0.002 0.25 ± 0.10	inches mm
RNC 16	0.063 ± 0.008 1.60 ± 0.20	0.032 ± 0.008 0.80 ± 0.20	0.016 ± 0.004 0.40 ± 0.10	0.012 ± 0.008 0.30 ± 0.20	0.012 ± 0.008 0.30 ± 0.20	inches mm
RNC 20	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.016 ± 0.004 0.40 ± 0.10	0.016 ± 0.008 0.40 ± 0.20	0.016 ± 0.008 0.40 ± 0.20	inches mm
RNC 32	0.126 ± 0.008 3.20 ± 0.20	0.063 ± 0.008 1.60 ± 0.20	0.020 ± 0.004 0.50 ± 0.10	0.020 ± 0.012 0.50 ± 0.30	0.016 ± 0.008 0.40 ± 0.20	inches mm
RNC 50	0.122 ± 0.006 3.10 ± 0.20	0.090 ± 0.006 2.40 ± 0.15	0.024 ± 0.004 0.60 ± 0.10	0.020 ± 0.012 0.50 ± 0.30	0.016 ± 0.008 0.40 ± 0.20	inches mm
RNC 57	0.193 ± 0.006 4.90 ± 0.15	0.090 ± 0.006 2.40 ± 0.15	0.024 ± 0.004 0.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	0.020 ± 0.010 0.50 ± 0.25	inches mm
RNC 63	0.246 ± 0.006 6.30 ± 0.15	0.122 ± 0.006 3.10 ± 0.15	0.024 ± 0.004 0.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	0.020 ± 0.010 0.50 ± 0.25	inches mm

Performance Characteristics (JIS C 5202)		
Test	Specification	Typical
Moisture Resistance, Thermal Shock	±(0.25% + 0.05Ω)	≤0.1%
Load Life	±(0.5% + 0.05Ω)	≤0.2%
Load Life in Moisture	±(0.5% + 0.05Ω)	≤0.25%
Resistance to Soldering Heat	±(0.25% + 0.05Ω)	≤0.5%
Solderability	Min 95% coverage	≥0.95%
Terminal Strength	±(0.2% + 0.05Ω)	≤0.05%
Dielectric Withstanding Voltage	±(0.25% + 0.05Ω)	≤0.05%
Short Time Overload	±(0.25% + 0.05Ω)	≤0.05%
Insulation Resistance	1GΩ minimum	≥1GΩ

Operating Temperature Range: -55°C to +125°C (0201);
-55°C to +155°C (0402 to 2512)