

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS

**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 866808

**Tyco / Electronics**  
**Raychem Circuit Protection**  
 308 Constitution Drive  
 Menlo Park, CA 94025-1164  
 Phone: 800-227-4856  
 Fax: 800-227-4866

**PolySwitch®**  
**PTC Devices**  
 Overcurrent Protection Device

**PRODUCT: RXEF030**

DOCUMENT: SCD 25217  
 PCN: 461130  
 REV LETTER: C  
 REV DATE: APRIL 7, 2005  
 PAGE NO.: 1 OF 1

**Specification Status: Released**

**Electrical Rating**

**Voltage: 72V MAX**  
**Current: 40A MAX**

**Insulating Material:**


Cured, Flame Retardant Epoxy Polymer  
 meets UL94 V-0 Requirements

**Lead Material:**

24 AWG Tin Plated Copper Clad Steel

**Marking:**

Raychem Logo and Voltage  
 XX 72  
 XF030 — Part Identification  
 □□□□ — Lot Identification (can be on back)

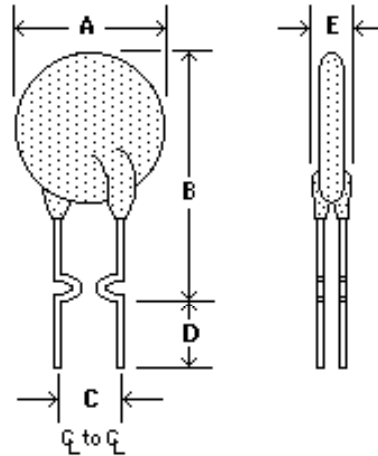

**TABLE I. DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	7.4	--	12.7	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.29)	--	(0.50)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED-STATE POWER DISSIPATION
AMPERES AT 20°C HOLD	AMPERES AT 20°C HOLD	AMPERES AT 20°C TRIP	OHMS AT 20°C		SECONDS AT 20°C, 1.5A MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
			MIN	MAX			
0.30	0.30	0.60	0.88	1.33	3.0	2.10	0.49

**Agency Recognitions:**

UL, CSA, TUV

**Reference Documents:**

Approved by UL as a current limiting impedance, per the 1996 NEC, Tables 11 (c) and 11 (b). PS300

**Precedence:**

This specification takes precedence over documents referenced herein.

**Effectivity:**

Reference documents shall be the issue in effect on the date of invitation for bid.

**CAUTION:**

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC Compliant

Directive 2000/53/EC Compliant

