


High Stability Thin Film Flat Chip Resistor $\leq 0.05\%$ (1000 h rated power at 70 °C)



TNPW e3 Precision Thin Film Flat Chip Resistors are the perfect choice for most fields of modern electronics where highest reliability and stability is of major concern. Typical applications include automotive, telecommunication, industrial, medical equipment, precision test and measuring equipment.

FEATURES

- Superior moisture resistivity $\leq 0.25\%$ (85 °C; 56 days; 85 % RH)
- Lead (Pb)-free solder contacts, RoHS compliant
- AEC-Q200 compliant (sizes 0402 to 1206)
- Low temperature coefficient and tight tolerances ($\pm 0.1\%$; ± 10 ppm/K)
- Waste gas resistant



APPLICATIONS

- Test and measuring equipment
- Telecommunication
- Medical equipment
- Industrial equipment
- Instrumentation
- Automotive

STANDARD ELECTRICAL SPECIFICATIONS							
DESCRIPTION	TNPW0402	TNPW0603	TNPW0805	TNPW1206	TNPW1210 ⁽¹⁾	TNPW2010	TNPW2512 ⁽¹⁾
Metric size	RR 1005M	RR 1608M	RR 2012M	RR 3216M	RR 3225M	RR 5025M	RR 6332M
Resistance range	10 Ω to 100 k Ω	10 Ω to 332 k Ω	10 Ω to 1 M Ω	10 Ω to 2 M Ω	10 Ω to 3.01 M Ω	10 Ω to 4.99 M Ω	10 Ω to 8.87 M Ω
Resistance tolerance	$\pm 1\%$; $\pm 0.5\%$; $\pm 0.1\%$						
Temperature coefficient	± 50 ppm/K; ± 25 ppm/K; ± 15 ppm/K; ± 10 ppm/K					± 50 ppm/K; ± 25 ppm/K	
Climatic category (LCT/UCT/days)	55/125/56	55/125/56	55/125/56	55/125/56	55/125/56	55/125/56	55/125/56
Rated dissipation, P_{70} ⁽²⁾	0.063 W	0.1 W	0.125 W	0.25 W	0.33 W	0.4 W	0.5 W
Operating voltage, U_{max} AC/DC	50 V	75 V	150 V	200 V	200 V	300 V	300 V
Maximum permissible film temperature	155 °C	155 °C	155 °C	155 °C	155 °C	155 °C	155 °C
Thermal resistance ⁽³⁾	870 K/W	550 K/W	440 K/W	220 K/W	170 K/W	140 K/W	110 K/W
Max. resistance change at P_{70} ; $\Delta R/R$	10 Ω to 100 k Ω	10 Ω to 332 k Ω	10 Ω to 1 M Ω	10 Ω to 2 M Ω	10 Ω to 3.01 M Ω	10 Ω to 4.99 M Ω	10 Ω to 8.87 M Ω
1000 h	$\leq 0.05\%$	$\leq 0.05\%$	$\leq 0.05\%$	$\leq 0.05\%$	$\leq 0.05\%$	$\leq 0.05\%$	$\leq 0.05\%$
8000 h	$\leq 0.10\%$	$\leq 0.10\%$	$\leq 0.10\%$	$\leq 0.10\%$	$\leq 0.10\%$	$\leq 0.10\%$	$\leq 0.10\%$
225 000 h	$\leq 0.30\%$	$\leq 0.30\%$	$\leq 0.30\%$	$\leq 0.30\%$	$\leq 0.30\%$	$\leq 0.30\%$	$\leq 0.30\%$
Insulation voltage:							
U_{ins} 1 min	75 V	100 V	200 V	300 V	300 V	300 V	300 V
Continuous	75 V	75 V	75 V	75 V	75 V	75 V	75 V
FIT _{observed}	$\leq 0.1 \times 10^{-9}/h$	$\leq 0.1 \times 10^{-9}/h$	$\leq 0.1 \times 10^{-9}/h$	$\leq 0.1 \times 10^{-9}/h$	$\leq 0.1 \times 10^{-9}/h$	$\leq 0.1 \times 10^{-9}/h$	$\leq 0.1 \times 10^{-9}/h$
Weight/1000 pieces	0.65 g	2 g	5.5 g	10 g	16 g	28 g	39 g

Notes

⁽¹⁾ Size not specified in EN 140401-801



⁽²⁾ Rated voltage $\sqrt{P \times R}$. The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). Using advanced temperature level may require special considerations towards the choice of circuit board and solder material. The rated dissipation applies only if the permitted film temperature is not exceeded.

⁽³⁾ Measuring conditions in accordance with EN 140401-801

- TNPW 0402 without marking



DIMENSIONS

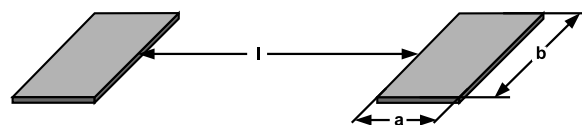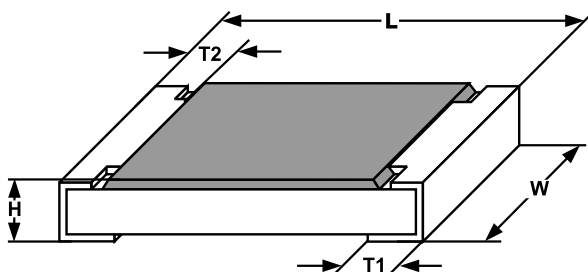

SIZE		DIMENSIONS in millimeters				
INCH	METRIC	L	W	H	T1	T2
0402	1005	1.0 ± 0.05	0.5 ± 0.05	0.35 ± 0.05	0.2 ± 0.10	
0603	1608	1.6 ± 0.10	0.85 ± 0.10	0.45 ± 0.10	0.3 ± 0.20	
0805	2012	2.0 ± 0.15	1.25 ± 0.15	0.45 ± 0.10	0.4 ± 0.20	
1206	3216	3.2 ± 0.15	1.6 ± 0.15	0.55 ± 0.10	0.5 ± 0.25	
1210	3225	3.2 ± 0.15	2.45 ± 0.15	0.60 ± 0.15	0.5 ± 0.25	
2010	5025	5.0 ± 0.15	2.5 ± 0.15	0.60 ± 0.15	0.6 ± 0.25	
2512	6332	6.3 ± 0.20	3.1 ± 0.15	0.60 ± 0.15	0.6 ± 0.25	

SOLDER PAD DIMENSIONS in millimeters							
SIZE		REFLOW SOLDERING			WAVE SOLDERING		
INCH	METRIC	a	b	l	a	b	l
0402	1005	0.4	0.6	0.5	-	-	-
0603	1608	0.5	0.9	1.0	0.9	0.9	1.0
0805	2012	0.7	1.3	1.2	0.9	1.3	1.3
1206	3216	0.9	1.7	2.0	1.1	1.7	2.3
1210	3225	0.9	2.5	2.0	1.1	2.5	2.3
2010	5025	1.0	2.5	3.9	1.2	2.5	3.9
2512	6332	1.0	3.2	5.2	1.2	3.2	5.2

TEMPERATURE COEFFICIENT AND RESISTANCE RANGE				
TYPE	TCR	TOLERANCE	RESISTANCE VALUE	E-SERIES
TNPW0402	± 50 ppm/K	± 1 %	10R to 100K	24 to 96
		± 0.5 %	10R to 100K	24 to 192
		± 0.1 %	47R to 100K	24 to 96
	± 25 ppm/K	± 1 %	10R to 100K	24 to 96
		± 0.5 %	10R to 100K	24 to 192
		± 0.1 %	47R to 100K	
± 15 ppm/K	± 0.1 %			
± 10 ppm/K	± 0.1 %			
TNPW0603	± 50 ppm/K	± 1 %	10R to 332K	24 to 96
		± 0.5 %	10R to 332K	24 to 192
		± 0.1 %	10R to 332K	24 to 96
	± 25 ppm/K	± 1 %	10R to 332K	24 to 192
		± 0.5 %	10R to 332K	
		± 0.1 %	47R to 332K	
± 15 ppm/K	± 0.1 %			
± 10 ppm/K	± 0.1 %			
TNPW0805	± 50 ppm/K	± 1 %	10R to 1M0	24 to 96
		± 0.5 %	10R to 1M0	24 to 192
		± 0.1 %	10R to 1M0	24 to 96
	± 25 ppm/K	± 1 %	10R to 1M0	24 to 192
		± 0.5 %	10R to 1M0	
		± 0.1 %	47R to 1M0	
± 15 ppm/K	± 0.1 %			
± 10 ppm/K	± 0.1 %			
TNPW1206	± 50 ppm/K	± 1 %	10R to 2M0	24 to 96
		± 0.5 %	10R to 2M0	24 to 192
		± 0.1 %	10R to 2M0	24 to 96
	± 25 ppm/K	± 1 %	10R to 2M0	24 to 192
		± 0.5 %	10R to 2M0	
		± 0.1 %	47R to 2M0	
± 15 ppm/K	± 0.1 %			
± 10 ppm/K	± 0.1 %			



High Stability Thin Film Flat Chip Resistor
 $\leq 0.05\%$ (1000 h rated power at 70 °C)

TEMPERATURE COEFFICIENT AND RESISTANCE RANGE				
TYPE	TCR	TOLERANCE	RESISTANCE VALUE	E-SERIES
TNPW1210	± 50 ppm/K	$\pm 1\%$	10R to 3M01	24 to 96
		$\pm 0.5\%$	10R to 3M01	24 to 192
		$\pm 0.1\%$	47R to 2M13	
	± 25 ppm/K	$\pm 1\%$	10R to 3M01	24 to 96
		$\pm 0.5\%$	10R to 3M01	24 to 192
		$\pm 0.1\%$	47R to 2M13	
TNPW2010	± 50 ppm/K	$\pm 1\%$	10R to 4M99	24 to 96
		$\pm 0.5\%$	10R to 4M99	24 to 192
		$\pm 0.1\%$	47R to 1M0	24 to 192
	± 25 ppm/K	$\pm 1\%$	10R to 4M99	
		$\pm 0.5\%$	10R to 4M99	
		$\pm 0.1\%$	47R to 1M0	
TNPW2512	± 50 ppm/K	$\pm 1\%$	10R to 8M87	24 to 96
		$\pm 0.5\%$	10R to 8M87	24 to 192
		$\pm 0.1\%$	47R to 1M0	
	± 25 ppm/K	$\pm 1\%$	10R to 8M87	24 to 96
		$\pm 0.5\%$	10R to 8M87	24 to 192
		$\pm 0.1\%$	47R to 1M0	

PART NUMBER AND PRODUCT DESCRIPTION					
<p>Products can be ordered using either the Product Description or the Part Number. For ordering TNPW with SnPb contacts please refer to latest edition of data sheet TNPW lead bearing.</p>					
<p>PART NUMBER: (LEAD (Pb)-FREE) TNPW12061K32DEEA</p>					
<p style="text-align: center;"> T N P W 1 2 0 6 1 K 3 2 D E E A </p>					
MODEL	VALUE	TOLERANCE	TCR	PACKAGING ⁽¹⁾	SPECIAL
TNPW0402 TNPW0603 TNPW0805 TNPW1206 TNPW1210 TNPW2010 TNPW2512	R = Decimal K = Thousand M = Million (4 digits)	B = $\pm 0.1\%$ D = $\pm 0.5\%$ F = $\pm 1.0\%$	H = ± 50 ppm/K E = ± 25 ppm/K X = ± 15 ppm/K Y = ± 10 ppm/K	EA EC ED EF EG EN EY	Up to 2 digits Blank = Standard
<p>PRODUCT DESCRIPTION: TNPW1206 1K32 0.5% T-9 ET1 e3</p>					
TNPW1206	1K32	0.5%	T-9	ET1	e3
MODEL	RESISTANCE VALUE	TOLERANCE	TCR	PACKAGING ⁽¹⁾	LEAD (Pb)-FREE
TNPW0402 TNPW0603 TNPW0805 TNPW1206 TNPW1210 TNPW2010 TNPW2512	Examples: 54R1 = 54.1 Ω 1K32 = 1320 Ω	$\pm 0.1\%$ $\pm 0.5\%$ $\pm 1.0\%$	T-2 = ± 50 ppm/K T-9 = ± 25 ppm/K T-10 = ± 15 ppm/K T-13 = ± 10 ppm/K	ET1 ET6 ET7 E02 E67 E52 E75	e3 = Pure Tin Termination Finish

Note

⁽¹⁾ Please refer to PACKAGING table

PACKAGING							
MODEL	TAPE WIDTH [mm]	PITCH [mm]	REEL DIAMETER [mm/inch]	PIECES PER REEL	PACKAGING CODE FOR PRODUCT DESCRIPTION	PACKAGING CODE FOR PART NUMBER	TYPE OF CARRIER TAPE
TNPW0402	8	2	180/7	10 000	ET7	ED	Paper
TNPW0603 TNPW0805 TNPW1206 TNPW1210	8	4	180/7	1000	E52 ⁽¹⁾	EN ⁽¹⁾	Paper
TNPW0603 TNPW0805 TNPW1206 TNPW1210	8	4	180/7	5000	ET1	EA	Paper
TNPW0603 TNPW0805 TNPW1206 TNPW1210	8	4	330/13	20 000	ET6	EC	Paper
TNPW2010	12	4	180/7	1000	E75	EY	Blister
				4000	E02	EF	Blister
TNPW2512	12	4	180/7	1000	E75	EY	Blister
				2000	E67	EG	Blister

Note

⁽¹⁾ E52/EN only for precision resistors with tolerance ± 0.1 % and temperature coefficient ≤ ± 25 ppm/K

DESCRIPTION

Production is strictly controlled and follows an extensive set of instructions established for reproducibility. A homogeneous film of metal alloy is deposited on a high grade Al₂O₃ ceramic substrate and conditioned to achieve the desired temperature coefficient. Specially designed inner contacts are deposited on both sides. A special laser is used to achieve the target value by smoothly fine trimming the resistive layer without damaging the ceramics. A further conditioning is applied in order to stabilize the trimming result. The resistor elements are covered by a protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final pure tin on nickel plating. The result of the determined production is verified by an extensive testing procedure on 100 % of the individual chip resistors. This includes pulse load screening for the elimination of products with a potential risk of early life failures according to EN 140401-801, 2.1.2.2. Only accepted products are laid directly into the tape in accordance with **EN 60286-3**.

ASSEMBLY

The resistors are suitable for processing on automatic SMD assembly systems. They are suitable for automatic soldering using wave, reflow or vapour phase as shown in **IEC 61760-1**. Excellent solderability is proven, even after extended storage in excess of 10 years. The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The suitability of conformal coatings, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system. The resistors are RoHS compliant, the puretin plating provides compatibility with lead (Pb)-free and lead-containing soldering processes. The immunity of the plating against tin whisker growth has been proven under extensive testing.

All products comply with the **GADSL** ⁽²⁾ and the **CEFIC-EECA-EICTA** ⁽³⁾ list of legal restrictions on hazardous substances. This includes full compliance with the following directives:

- 2000/53/EC End of Vehicle life Directive (ELV) and Annex II (ELV II)
- 2002/95/EC Restriction of the use of Hazardous Substances Directive (RoHS)
- 2002/96/EC Waste Electrical and Electronic Equipment Directive (WEEE)

Solderability is specified for 2 years after production or re-qualification. The permitted storage time is 20 years.







Notes

⁽²⁾ Global Automotive Declarable Substance List, see www.gadsl.org


⁽³⁾ CEFIC (European Chemical Industry Council), EECA (European Electronic Component Manufacturers Association), EICTA (European trade organisation representing the information and communications technology and consumer electronics), see www.eicta.org → issue → environment policy → chemicals → chemicals for electronics




FUNCTIONAL PERFORMANCE

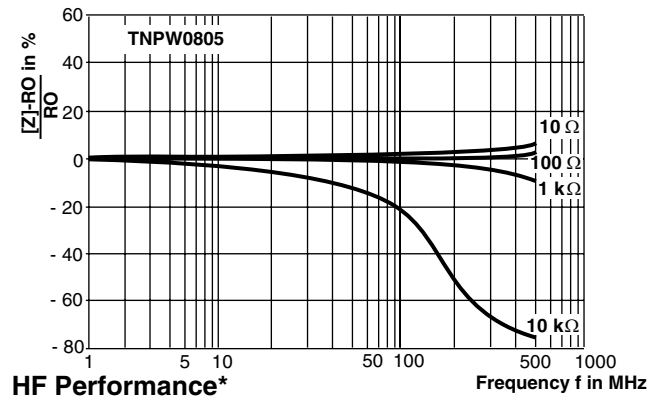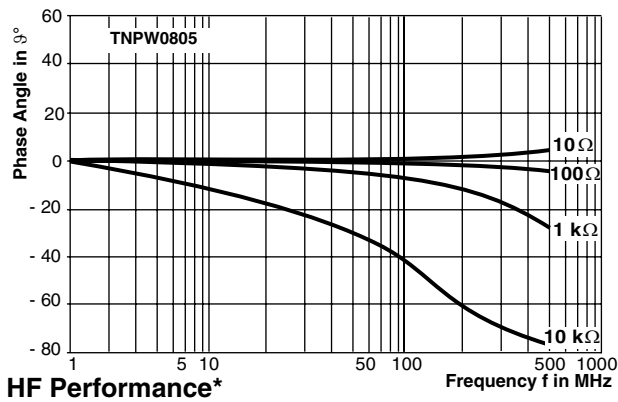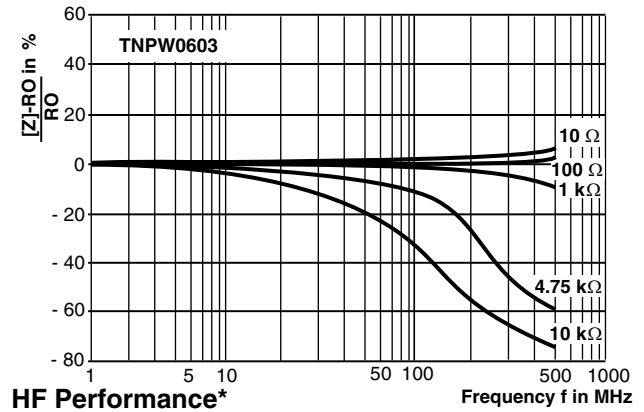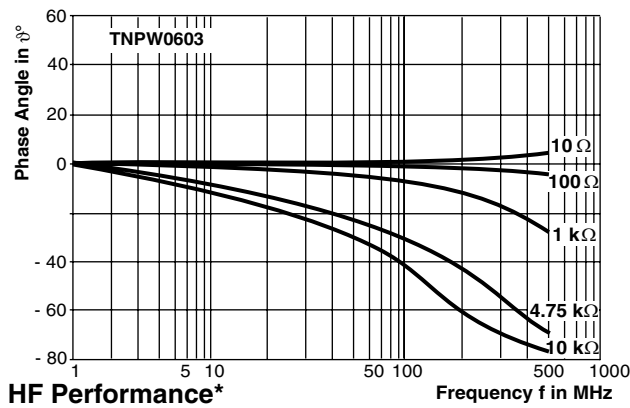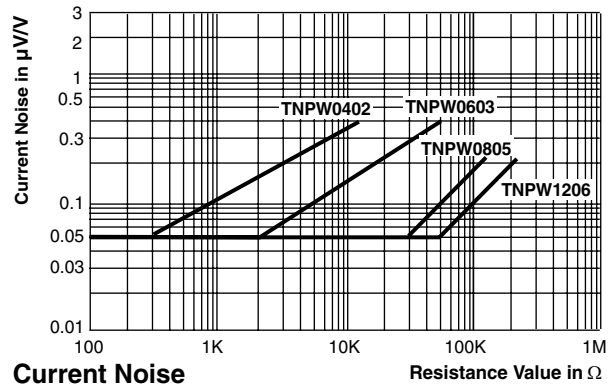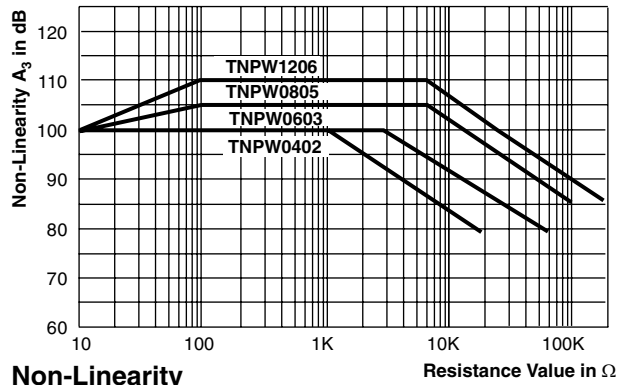


* Typical figures. HF-characteristic also depends on termination and circuit design.

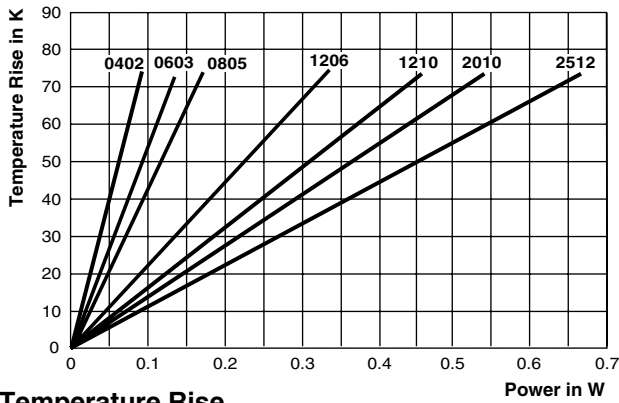


Temperature Rise

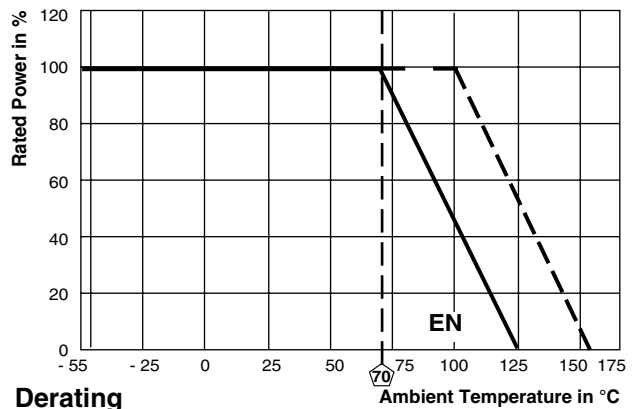


Derating

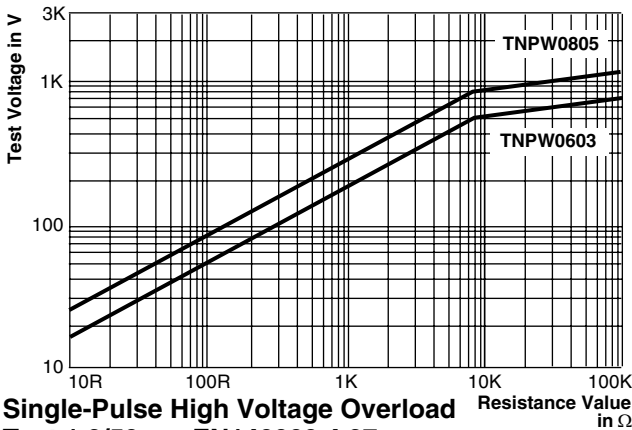


Single-Pulse High Voltage Overload
 Test 1.2/50 μ s EN140000 4.27

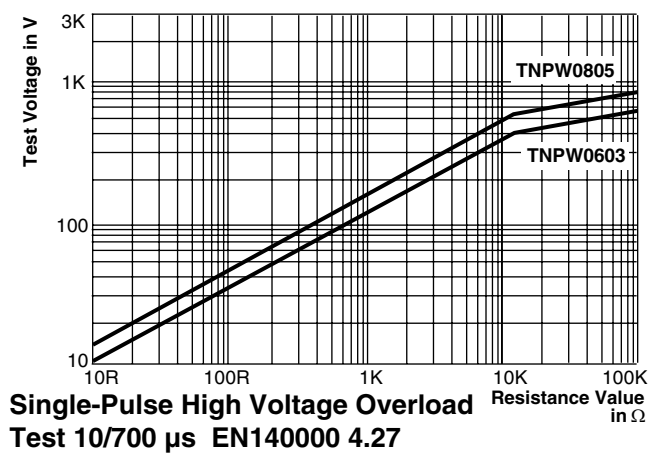

Single-Pulse High Voltage Overload
 Test 10/700 μ s EN140000 4.27

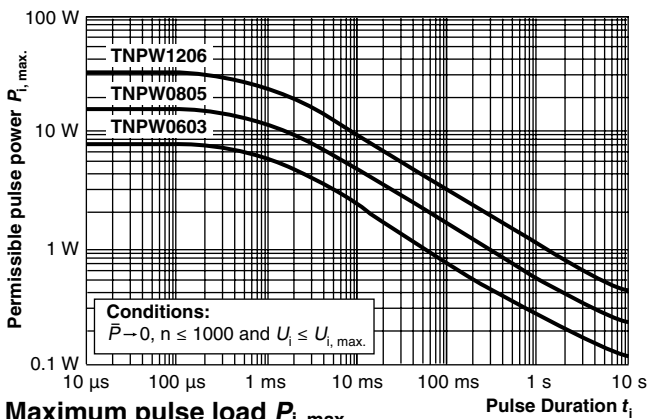


Maximum pulse load $P_{i, \max}$
 for single pulses

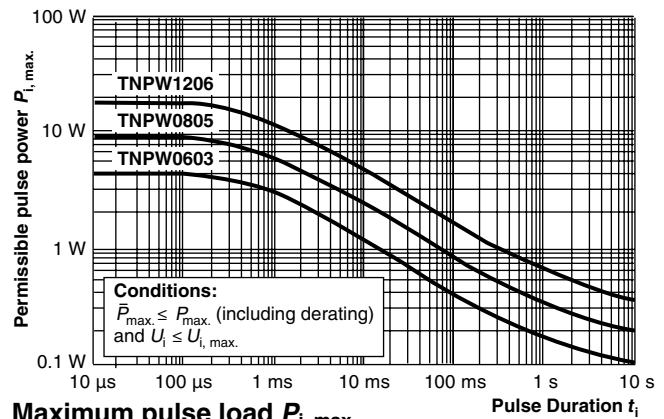

Maximum pulse load $P_{i, \max}$
 for continuous pulses

High Stability Thin Film Flat Chip Resistor
 $\leq 0.05\%$ (1000 h rated power at 70 °C)

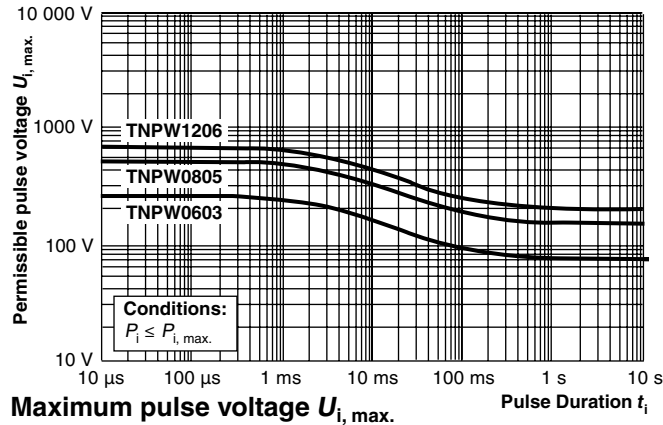
TEST AND REQUIREMENTS

All tests are carried out in accordance with the following specifications:

- EN 60115-1, Generic specification (includes tests)
- EN 140400, Sectional specification (includes schedule for qualification approval)
- EN 140401-801, Detail specification (includes schedule for conformance inspection)

The following table contains only the most important tests. For the full test schedule refer to the documents listed above. The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5202. The tests are carried out in accordance with IEC 60068 and under standard atmospheric conditions in accordance with IEC 60068-1, 5.3. Climatic category LCT/UCT/56 (rated temperature range: Lower

Category Temperature, Upper Category Temperature; damp heat, long term, 56 days) is valid. Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

The components are mounted for testing on boards in accordance with EN 60115-1, 4.31 unless otherwise specified. The parameters stated in the Test Procedures and Requirements table are based on the required tests and permitted limits of EN 140401-801. However, some additional tests and a number of improvements against those minimum requirements have been included.

TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE
			Stability for product types: TNPW0402 TNPW0603 TNPW0805 TNPW1206 TNPW1210 TNPW2010 TNPW2512	
4.5	-	Resistance		$\pm 1\%$; $\pm 0.5\%$; $\pm 0.1\%$
4.8.4.2	-	Temperature coefficient	At 20/- 55/20 °C \pm and 20/125/20 °C	± 50 ppm/K; ± 25 ppm/K; ± 15 ppm/K; ± 10 ppm/K
4.25.1	-	Endurance at 70 °C	$U = \sqrt{P_{70} \times R}$ or $U = U_{max.}$; whichever is the less severe; 1.5 h on; 0.5 h off; 70 °C; 1000 h 70 °C; 8000 h	$\pm (0.05\% R + 0.01 \Omega)$ $\pm (0.1\% R + 0.02 \Omega)$

TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE
			Stability for product types: TNPW0402 TNPW0603 TNPW0805 TNPW1206 TNPW1210 TNPW2010 TNPW2512	
4.25.3	-	Endurance at upper category temperature	125 °C; 1000 h 155 °C; 1000 h	± (0.05 % R + 0.01 Ω) ± (0.1 % R + 0.02 Ω)
4.24	78 (Cab)	Damp heat, steady state	(40 ± 2) °C; 56 days; (93 ± 3) % RH	± (0.1 % R + 0.01 Ω)
4.23		Climatic sequence:		
4.23.2	2 (Ba)	Dry heat	UCT; 16 h	
4.23.3	30 (Db)	Damp	55 °C; 24 h; > 90 % RH; 1 cycle	
4.23.4	1 (Aa)	Cold	LCT; 2 h	± (0.1 % R + 0.02 Ω)
4.23.5	13 (M)	Low air	8.5 kPa; 2 h; 25 ± 10 °C	
4.23.6	30 (Db)	Damp heat, cyclic	55 °C; 5 days; > 95 to 100 % RH; 5 cycles	
4.23.7	-	D.C. load	$U = \sqrt{P_{70} \times R} \leq U_{max.}; 1 \text{ min}$ LCT = - 55 °C UCT = 125 °C	
-	1 (Aa)	Cold	- 55 °C; 2 h	± (0.05 % R + 0.01 Ω)
4.19	14 (Na)	Rapid change of temperature	30 min at LCT and 30 min at UCT; LCT = - 55 °C; UCT = 125 °C; 1000 cycles	± (0.1 % R + 0.01 Ω)
4.13	-	Short time overload	$U = 2.5 \times \sqrt{P_{70} \times R}$ or $U = 2 \times U_{max.};$ whichever is the less severe; 5 s	± (0.05 % R + 0.01 Ω)
4.27	-	Single pulse high voltage overload	Severity no. 4: $U = 10 \times \sqrt{P_{70} \times R}$ or $U = 2 \times U_{max.};$ whichever is the less severe; 10 pulses 10 μs/700 μs	± (0.5 % R + 0.05 Ω) no visible damage
4.37	-	Periodic electric overload	$U = \sqrt{15 \times P_{70} \times R}$ or $U = 2 \times U_{max.};$ whichever is the less severe; 0.1 s on; 2.5 s off; 1000 cycles	± (0.5 % R + 0.05 Ω) no visible damage
4.22	6 (Fc)	Vibration	Endurance by sweeping; 10 to 2000 Hz; no resonance; amplitude ≤ 1.5 mm or ≤ 200 m/s ² ; 6 h	± (0.05 % R + 0.01 Ω) no visible damage



High Stability Thin Film Flat Chip Resistor
 $\leq 0.05\%$ (1000 h rated power at 70 °C)

TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE
			Stability for product types: TNPW0402 TNPW0603 TNPW0805 TNPW1206 TNPW1210 TNPW2010 TNPW2512	
4.17.2	58 (Td)	Solderability	Solder bath method; SnPb40; non-activated flux (215 ± 3) °C; (3 ± 0.3) s Solder bath method; SnAg3Cu0.5 or SnAg3.5; non-activated flux (235 ± 3) °C; (2 ± 0.2) s	Good tinning ($\geq 95\%$ covered); no visible damage
4.18.2	58 (Td)	Resistance to soldering heat	Solder bath method; (260 ± 5) °C; (10 ± 1) s	$\pm (0.02\% R + 0.01 \Omega)$
4.29	45 (XA)	Component solvent resistance	Isopropyl alcohol + 50 °C; method 2	No visible damage
4.32	21 (Ue ₃)	Shear (adhesion)	RR 1005M and RR 1608M; 9 N RR 2012M and RR 3216M; 45 N	No visible damage
4.33	21 (Ue ₁)	Substrate bending	Depth 2 mm, 3 times	$\pm (0.05\% R + 0.01 \Omega)$ no visible damage, no open circuit in bent position
4.7	-	Voltage proof	$U_{rms} = U_{ins}$; 60 ± 5 s	No flashover or breakdown
4.35	-	Flammability	IEC 60695-11-5, needle flame test; 10 s	No burning after 30 s
-	-	Damp heat	(85 ± 5) °C; 56 days (85 ± 5) % RH	$\pm (0.25 R + 0.05 \Omega)$

APPLICABLE SPECIFICATIONS
<ul style="list-style-type: none"> • CECC40000/40400 • EN140400 • EN 140401-801 • EN 60115-1 • IEC 60286-3



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.